

Bathroom Concept: wall set (drawings)

Bathroom renovation · Bathroom (no site address recorded) · printed 2026-10-08 · 55 A3 pages

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



How to read these sheets

- Dimensions in millimetres. Every figure carries its status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown. Treat anything not SC or M as a figure to check on site.
- Elevations look at a wall from inside the room; end A is on the left. Wall fittings are set out from the wall's finished (tile) face: centreline along from the return wall's face at A, bottom above the finished floor.
- F1, F2... are the fixtures (see the fixture schedule); F11.2 is service point 2 of fixture 11. "?" means not known yet and never drawn.
- Scale 1:20 at A3 on the plans and elevations. Print at 100% ("actual size"), never "fit to page".

15 sections. Generated from the project model by npm run printables; the drawings are the same exports saved in the repository (shots/stage-pack, shots/sample-sheets).

Contents

Sheet	Page
Who needs what, open decisions, still to measure	2
Fixture schedule	3
A-01 floor plan	4
1. Post-demolition: frame and slab plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	5–9
2. Frame prep: board lined to the frame plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	10–14
3. Rough-in: drains and service points plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	15–19
4. Waterproofing: floor membrane only (stopgap) plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	20–24
5. Heating cable on the membrane plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	25–29
6. Screed and falls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	30–34
7. Tile adhesive, floor and walls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	35–39
8. Tiles laid, floor and walls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	40–44
9. Fit-out: fixtures and their service points plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west)	45–49
Floor tiling	50
Wall tiling window wall (north) · right wall (east) · door wall (south) · left wall (west)	51–54
3D renders	55

Who needs what, and what is still open

Sheets by trade

Trade	Sheets
Demolition / builder	Post-demolition (p. 5–9); Frame prep (p. 10–14); A-01 (p. 4)
Plumber	Rough-in (p. 15–19); Screed and falls (p. 30–34); Fit-out (p. 45–49); Fixture schedule (p. 3)
Electrician	Rough-in (p. 15–19); Heating cable (p. 25–29); Fixture schedule (p. 3)
Waterproofer	Waterproofing (p. 20–24); Screed and falls (p. 30–34)
Tiler	Screed and falls (p. 30–34); Tile adhesive (p. 35–39); Tiles laid (p. 40–44); Floor tiling (p. 50); Wall tiling (p. 51–54)
Glazier / fit-out	Fit-out (p. 45–49); Fixture schedule (p. 3)

Open owner decisions

- Shower lower bracket height: 1200 mm above the finished floor is in use (P, owner proposal, not confirmed); the G1/2 inlet follows at 1700 mm.
- Heating cable under the toilet and the vanity: keep-outs not decided; the proposed route runs under both.
- Wall membrane extent: whole window wall, side walls to 100 mm past the screen line, 150 mm strip elsewhere (proposed). Wall layers are whole-wall in the model, so it is a note, not drawn (#88).
- Which face the screen's 1200 mm (and the other 'from the window wall' figures) is measured to: drawings hold them from the window wall's existing surface.
- Shower mixer and towel rails along the left wall: places not chosen; drawn where the plan has them, tagged E.

Measure first

- Before strip-out: present positions of the vanity's waste and water points, the shaving cabinet and the GPO, so the 300 mm moves can be set out.
- After demolition: slab level (about 120 mm below the current tile, E), the frame faces of each wall, and the wall height from the slab.
- Once the frame is confirmed, the finished faces follow; every set-out on these sheets is read off those faces.


Still to measure or confirm (20)

- Bath set K1132-##-150+KDPP32**: Plate centre height (owner proposed 750 mm, 7 Oct 2026; not surveyed) and position along the right wall (owner proposed 500 mm from the window wall); in-wall body inlet spacing and concealed depth are not on the set drawing. From: finished floor tiles, on the right-wall finished (tile) face once that face is surveyed; the window wall's finished face for the 500 mm.
- Shower Y1173-31-11-250**: Height of the lower bracket (owner proposed 1200 mm, 7 Oct 2026; not surveyed). The G1/2 inlet at the upper rose follows 500 mm higher. From: finished floor tiles, on the left-wall finished (tile) face once that face is surveyed.
- Shower Y1173-31-11-250**: Height of the slider/holder on the 981 mm rail (3D position is illustrative; sheet 106.4 mm is the holder's horizontal projection from the wall/mounting face, not a height). From: the rail's lower end, or a named point on the finished wall.
- Shower Y1173-31-11-250**: Position of the 3F handpiece on the rail (3D position is illustrative; drawing B sizes 246.3 × Ø105 × 45.4 mm are published). From: the rail's lower end, or a named point on the finished wall.
- Towel rail VS900HBN (both)**: Height of the rail foot. From: finished floor tiles, on the left-wall finished (tile) face (owner proposed 750 mm; not surveyed).
- Towel rail VS900HBN (both)**: Bracket end offsets along the 900 mm tube (60 mm, inferred from (900 – 780) / 2, not a sheet dimension). From: each end of the 900 mm tube, to the fixing centre (sheet publishes 780 mm centres only).
- Ahrok SDP-40BN bath waste**: Visible dome diameter and dome height above the waste flange (unsourced; drawn stand-ins live only on the kind size). From: the bath floor / waste flange of SB184-1000GW (no manufacturer sheet; carton names the 40 mm connection only).
- Ahrok SDP-40BN bath waste**: Fit of the 40 mm connection in the bath's Ø50 waste hole (owner, 7 Oct 2026: ordered with the bath, so expected to match; check on delivery). From: the Ø50 waste on the bath bisector, 520 mm from the right-angle corner.
- Ahrok SDP-40BN bath waste**: Elevation of the waste dome (unsourced; drawn stand-in 590 mm above finished floor lives only on the kind). That figure conflicts with the bath's published 630 mm overall height and 550 mm inside depth. From: the bath floor / waste flange; finished floor does not exist yet.
- Basin mixer K1110-31**: Deck height above the finished floor (unsourced; drawn stand-in 850 mm lives only on the kind, taken from the vanity's measured overall height 850 mm; not an owner proposal and not a finished-floor tape). From: finished floor tiles once they exist, to the vanity deck / mixer flange.
- OJ MWD5-1999-CBP3 thermostat**: Cover-plate width, height and projection of this exact CBP3 cover (unsourced; drawn stand-ins live only on the kind size). From: the CBP3 cover itself (brochure lists OxD5 / MxD5 / MxD5-UA sizes without naming CBP3).
- OJ MWD5-1999-CBP3 thermostat**: Mounting height to the plate. From: hallway finished floor, next to the light switch (owner: 1000 mm, 7 Oct 2026; not surveyed).
- SCK0765L in-screed heating cable**: Keep-out for the vanity (not on the carton; route is unconstrained there). From: finished vanity footprint, once the installer says whether cable stops short of it.
- SCK0765L in-screed heating cable**: Cable centre height in the screed (not on the carton). From: bottom face of the tiler's screed (top of the membrane / subfloor stack), not the underside of the tile unless that is the screed top.
- SCK0765L in-screed heating cable**: Cover over the cable, minimum bend radius, and whether the Coldbuster in-screed manual (July 2023, taken as this cable's: it does not name SCK0765L) applies; the floor sensor's conduit position (manual: about 300 mm into the heated area, between runs). From: Coldbuster, for this exact cable; the electrician for the sensor conduit.
- Shower mixer K1130-31**: Plate centre height (owner proposed 1000 mm, 7 Oct 2026; not surveyed), position along the shower wall (not chosen; drawn 850 mm from the window wall) and body depth behind the tile. From: finished floor tiles, on the left-wall finished (tile) face.
- Toilet Cygnet Over-height with SpaLet**: S-trap set-out for the new waste (sheet: 140–260 mm, 260 nominal) and the cold water (180 mm high, 180 mm left of centre) and SpaLet power (300 mm high, 330 mm left of centre) points at the moved position. From: the finished wall behind the pan and the pan centreline, facing the toilet; finished floor for heights.
- Shower screen (Future Glass fixed panel)**: Which face the 1200 mm from the window wall is measured to. From: the window wall's finished (tile) face or its frame, to the panel's centreline.
- Bath SB184-1000GW**: Check the delivered bath: 1000 mm wall sides, 1090 mm corner-to-front, 630 mm height, waste 520 mm from the corner. From: the two wall sides and the right-angle corner (sheet notes slight variations).
- Room walls**: Survey finished wall faces (or confirm the frame after strip-out) so the wall fittings' set-out and installed heights read off measured faces, not estimated ones. From: each room-facing wall: existing surface is measured; finished face is still estimated from the frame plus proposed layers.

Fixture schedule

From the project model. Set-out along a wall is read from the return wall's finished face; heights are above the finished floor (flat target 0 P = the current tile level). Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown.

No.	Item	Product	Selection	Envelope W × D × H	Set-out	Height	Service points (up above finished floor; across the fixture's centreline facing it, left –; out from the wall face)
F1	Corner bath	Enflair · Angie Corner 1000mm Bath, GW · SB184-1000GW	purchased	1018 × 1018 × 630	not set out from a wall: position as drawn on the plan	stands on the finished floor	none recorded
F2	Bath mixer and spout	Enflair · Profile III 150mm basin/bath wall mixer set with rectangular plate · K1132-##-150+KDPP32	purchased	200 × 162 × 117	right wall (east): back on the finished face, centreline 525 P along from Finished face of the window wall (north)	bottom 665.5 P above the finished floor (lever end (envelope bottom); plate centre is the owner's proposed 750 mm)	water: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing), 750 P up, 60 P across, 0 P out
F3	Bath waste	Ahrok · Dome Pop Short Bath Waste 40mm, with pull out basket · SDP-40BN	purchased	70 × 70 × 20	in F1 Corner bath: 141.3 across, 367.7 from its back (DER)	? (no recorded height)	none recorded
F4	Basin mixer	Enflair · Profile III petite basin mixer · K1110-31	purchased	48 × 145 × 148	in F9 Vanity: 0 across, 62.5 from its back (DER)	? (no recorded height)	none recorded
F5	Shower system	Profile round twin shower system with adjustable rail · Y1173-31-11-250	purchased	250 × 552 × 981	left wall (west): back on the finished face, centreline 2445 P along from Finished face of the door wall (south)	bottom 1129.7 P above the finished floor (rail foot, 70.3 mm below the lower bracket (derived); lower bracket is the owner's proposed 1200 mm)	water: G1/2 inlet at the upper wall rose (on the rail centreline), 1700 P up, 0 P across, 0 P out
F6	Shower mixer	Enflair · Profile III shower/bath wall mixer · K1130-31	purchased	65 × 69.5 × 117	left wall (west): back on the finished face, centreline 2195 E along from Finished face of the door wall (south)	bottom 915.5 E above the finished floor (lever end (envelope bottom); plate centre is the owner's proposed 1000 mm)	water: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived), 1000 P up, 0 P across, 0 P out
F7	Towel rail	Thermorail · VS900HBN · VS900HBN	purchased	142 × 100 × 900	left wall (west): back on the finished face, centreline 1220 E along from Finished face of the door wall (south)	bottom 750 E above the finished floor	none recorded
F8	Towel rail	Thermorail · VS900HBN · VS900HBN	purchased	142 × 100 × 900	left wall (west): back on the finished face, centreline 1470 E along from Finished face of the door wall (south)	bottom 750 E above the finished floor	none recorded
F9	Vanity	Gloss white floor-standing vanity, ceramic top with integrated basin (reused)	reused	910 × 465 × 850	right wall (east): back on the finished face, centreline 1725 P along from Finished face of the window wall (north)	stands on the finished floor	none recorded
F10	Shaving cabinet	Two-door mirror shaving cabinet (reused)	reused	750 × 160 × 620	right wall (east): back on the finished face, centreline 1725 P along from Finished face of the window wall (north)	bottom 1200 P above the finished floor	none recorded
F11	Toilet	American Standard · Cygnet Hygiene Rim Over-height Square close coupled back-to-wall toilet suite, bottom inlet, with SpaLet E-bidet seat · 9509830	reused	381 × 700 × 857	right wall (east): back on the finished face, centreline 2625 P along from Finished face of the window wall (north)	stands on the finished floor	waste: Pan waste, S-trap (floor), 0 PUB across, 140–260 PUB out water: Cold water point (stop tap), 180 PUB up, -180 PUB across, 0 PUB out power: SpaLet seat power point, 300 PUB up, -330 PUB across, 0 PUB out
F12	Fixed glass screen	not recorded	unknown	900 × 10 × 2000	not set out from a wall: position as drawn on the plan	stands on the finished floor	none recorded

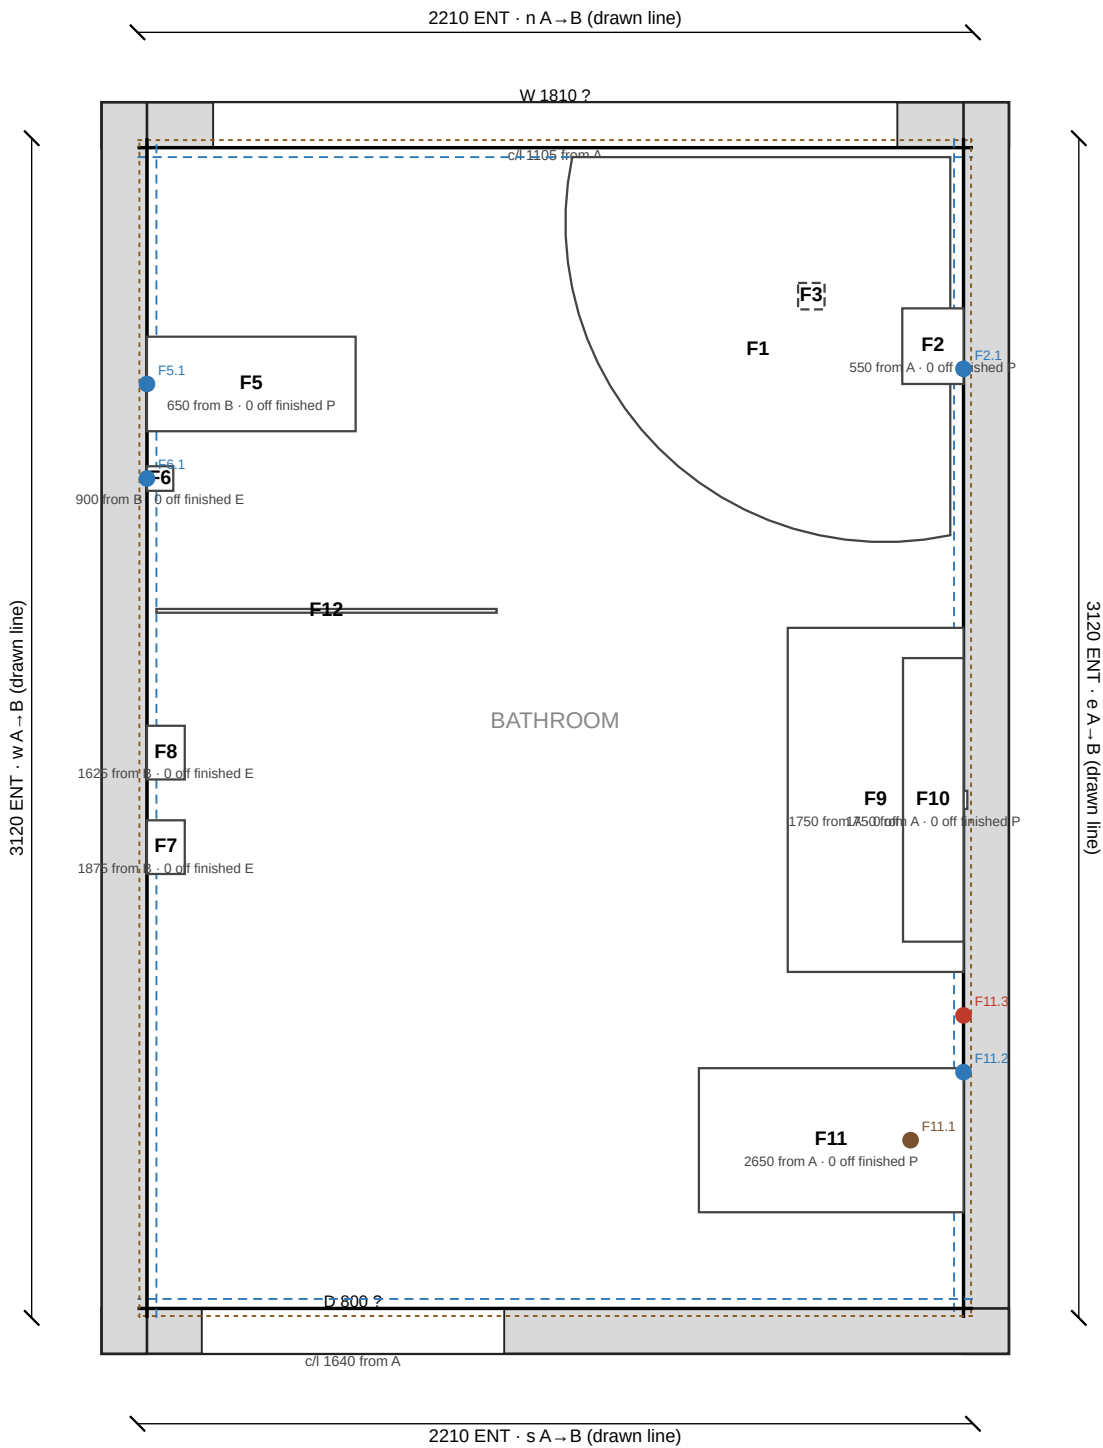

Legend

Status: SC site-confirmed · M measured · PUB published · P proposed
E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default · ? unknown
Faces: blue dashed existing · brown dotted frame · black finished
Points: brown waste · blue water · red power. Grey = wall as built.

Wall build-up (mm from drawn line, toward the side)

n right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) 10
e right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10
s right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10
w right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10

Rough-in (mm out from face · along from A · up from FFL)

F1 Corner bath (not set out)
F2 Bath mixer and spout
F2.1 Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): frame 20 · board 14 · fin 0 · A 610 · up 750 P
F3 Bath waste (not set out)
F4 Basin mixer (not set out)
F5 Shower system
F5.1 G1/2 inlet at the upper wall rose (on the rail centreline): frame 20 · board 14 · fin 0 · A 2470 · up 1700 P
F6 Shower mixer
F6.1 Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): frame 20 · board 14 · fin 0 · A 2220 · up 1000 P
F7 Towel rail
F8 Towel rail
F9 Vanity
F10 Shaving cabinet
F11 Toilet
F11.1 Pan waste, S-trap (floor): frame 160–280 · board 154–274 · fin 140–260 · A 2650 · up ? PUB
F11.2 Cold water point (stop tap): frame 20 · board 14 · fin 0 · A 2470 · up 180 PUB
... 2 more: see get_rough_in / check_sheets

Unresolved (20)

- Bathroom floor tiling: Grate outlines come from the linked drain briefs. Confirm clearance, edge joints and cut shape on site.
- Bathroom floor tiling: east cut is 32 mm: narrow piece for tiler review.
- Bathroom floor tiling: Tiles cross floor-plane boundaries. Confirm slope-break cuts and movement joints with the tiler.
- Bathroom floor tiling: Review fields: door door_s transition: finished face or real clear width unresolved; fall plane Shower: slope/levels unresolved; fall plane Beside the shower (under the bath): slope/levels unresolved; fall plane Dry area: slope/levels unresolved.
- Room "Bathroom" floor: Unknown: Tiler's screed (heating cable inside) thickness. Read down from the finished-level target, only tiler's screed (heating cable inside) top stay unresolved; Tiler's screed (heating cable inside) + Tiler's adhesive fill 108.5 mm together.
- Room "Bathroom" drainage: Plane "Shower" has no derived heights: unknown Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level.
- Room "Bathroom" drainage: Plane "Beside the shower (under the bath)" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.
- Room "Bathroom" drainage: Plane "Dry area" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.
- bath_mixer, shower_system, shower_mixer, towel_rail, towel_rail_2, shaving_cabinet: Falls unresolved at this point: height read from the flat finished-floor target.
- Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- ... 10 more: see get_rough_in / check_sheets

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Sheet A-01: Floor plan, faces and rough-in


Scale 1:20 @ A3 · PREVIEW, not issued

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Unresolved in this view (0)

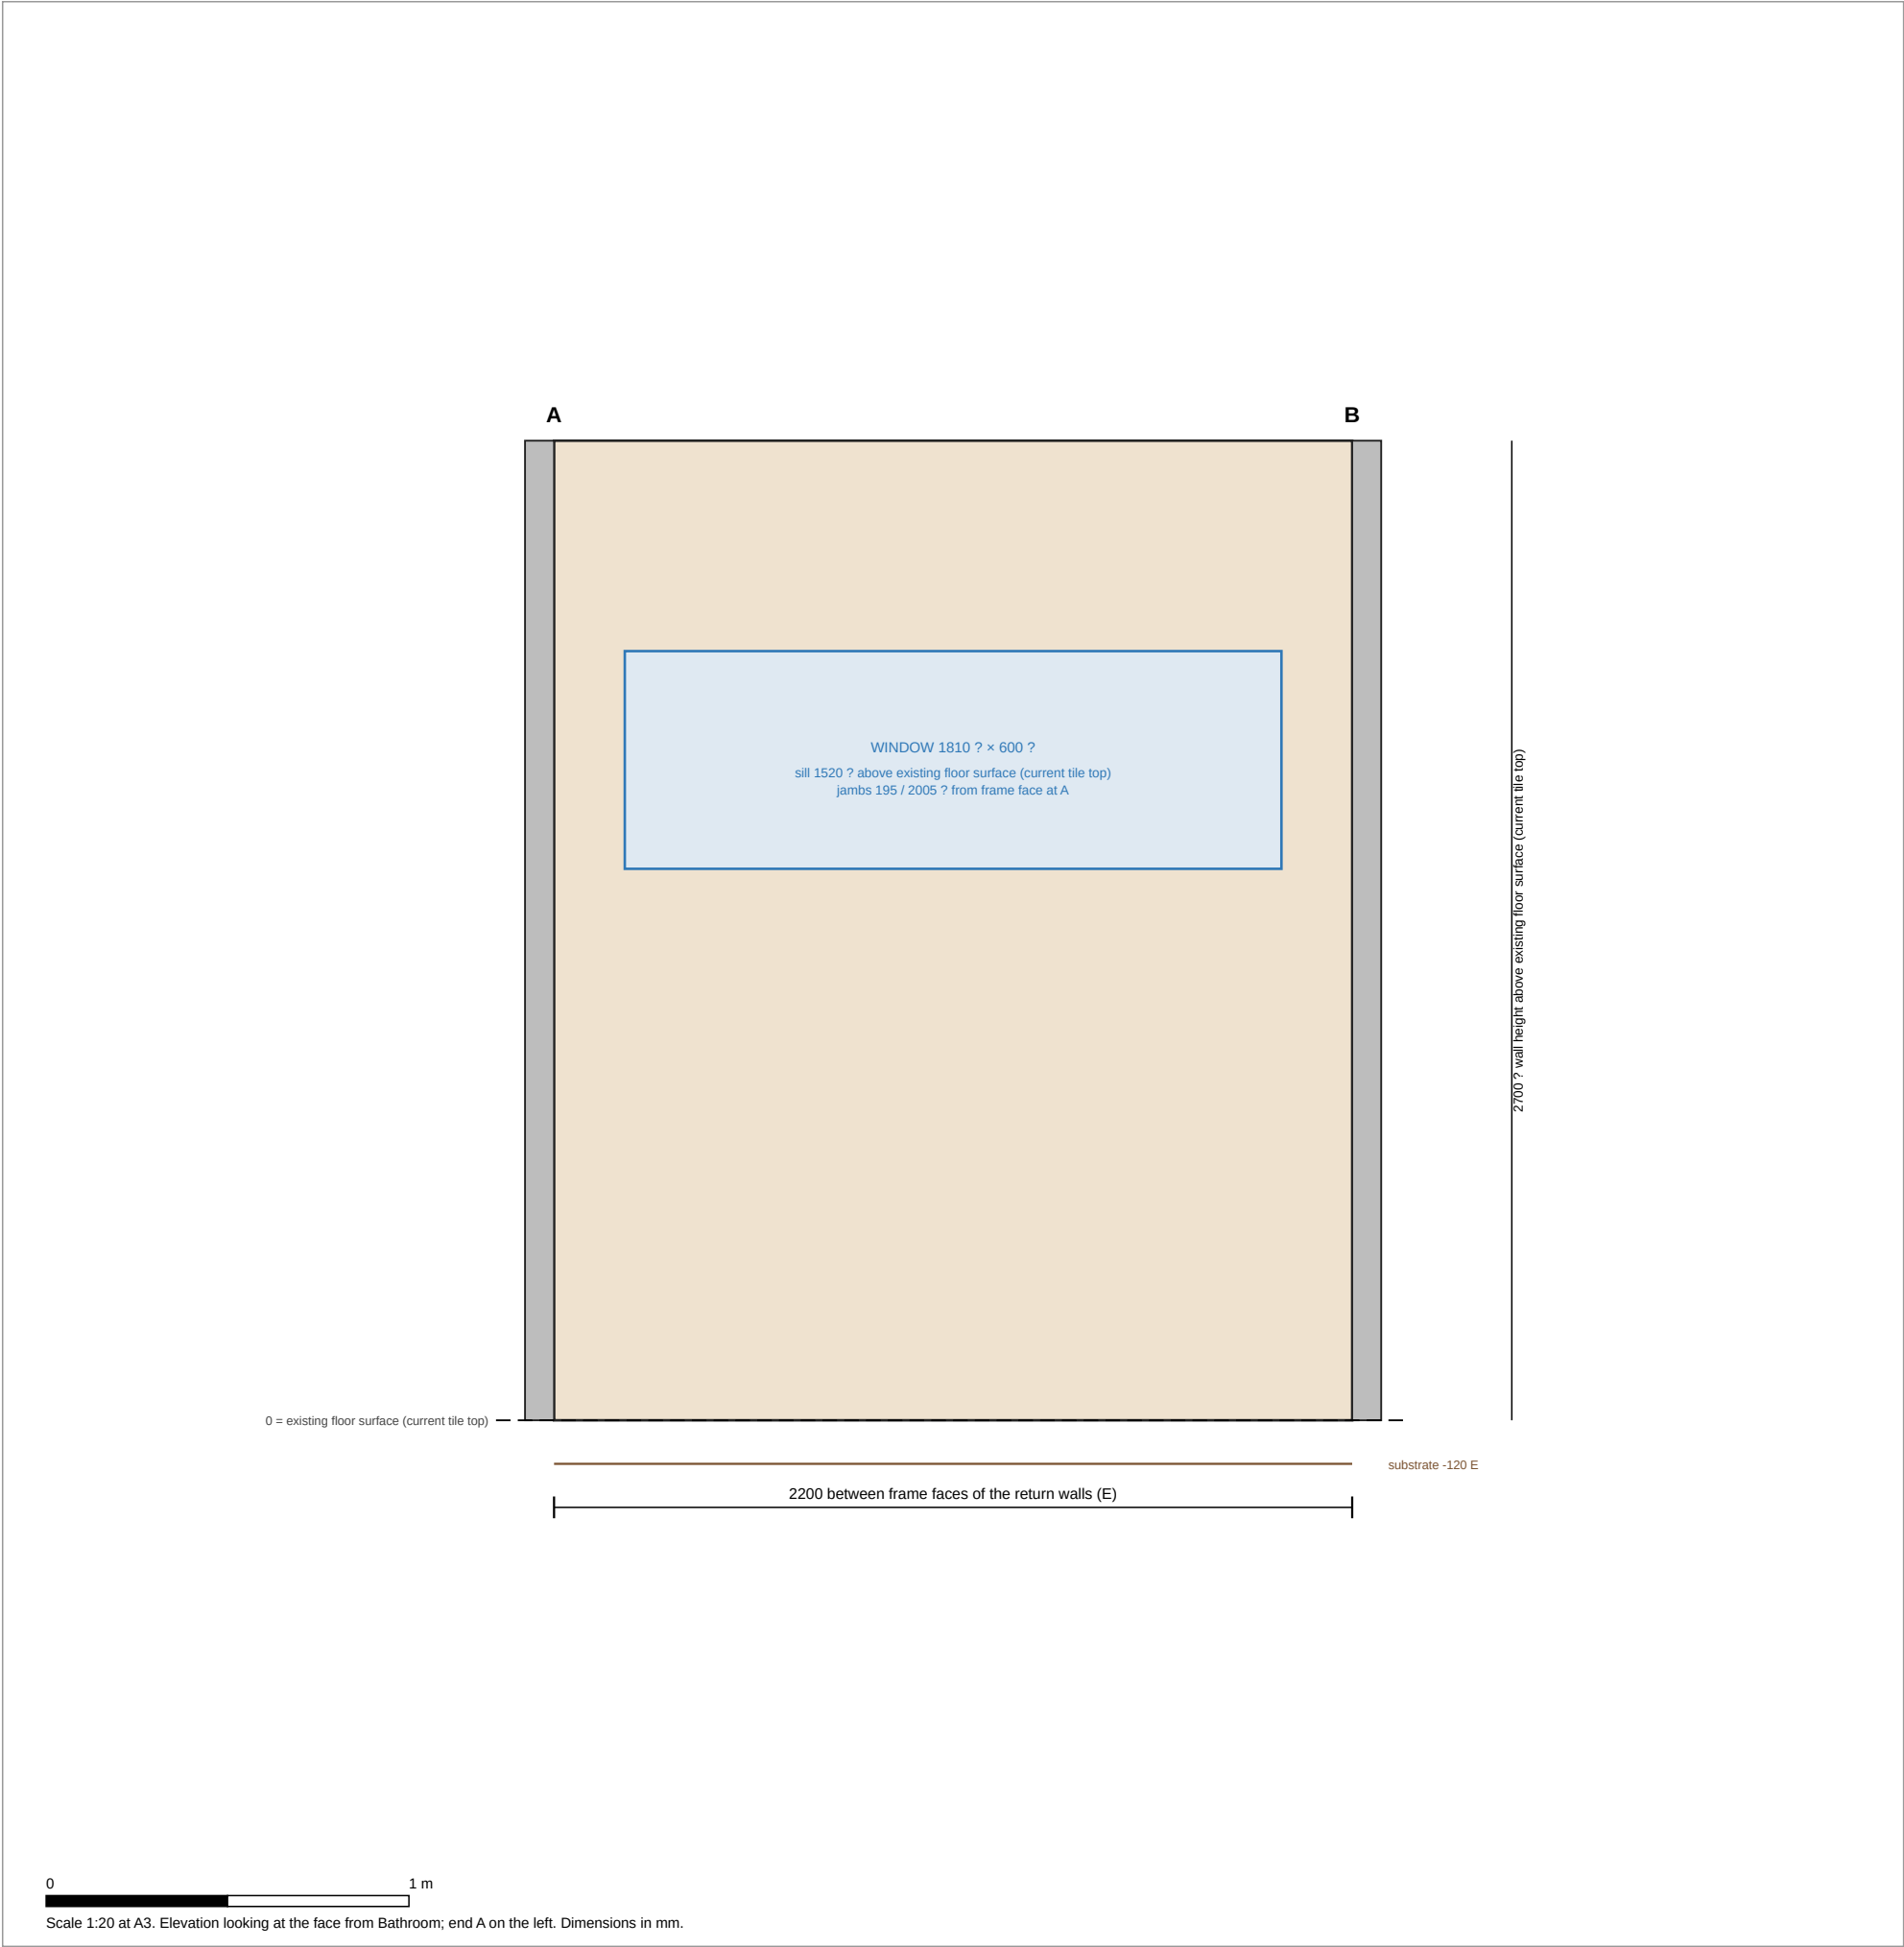

Stage: 1. Post-demolition: frame and slab

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_w (right side) at 5 E along the drawn line.
End B: Frame face of wall_e (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 1. Post-demolition: frame and slab · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 1. Post-demolition: frame and slab


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_n (right side) at 5 E along the drawn line.
End B: Frame face of wall_s (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

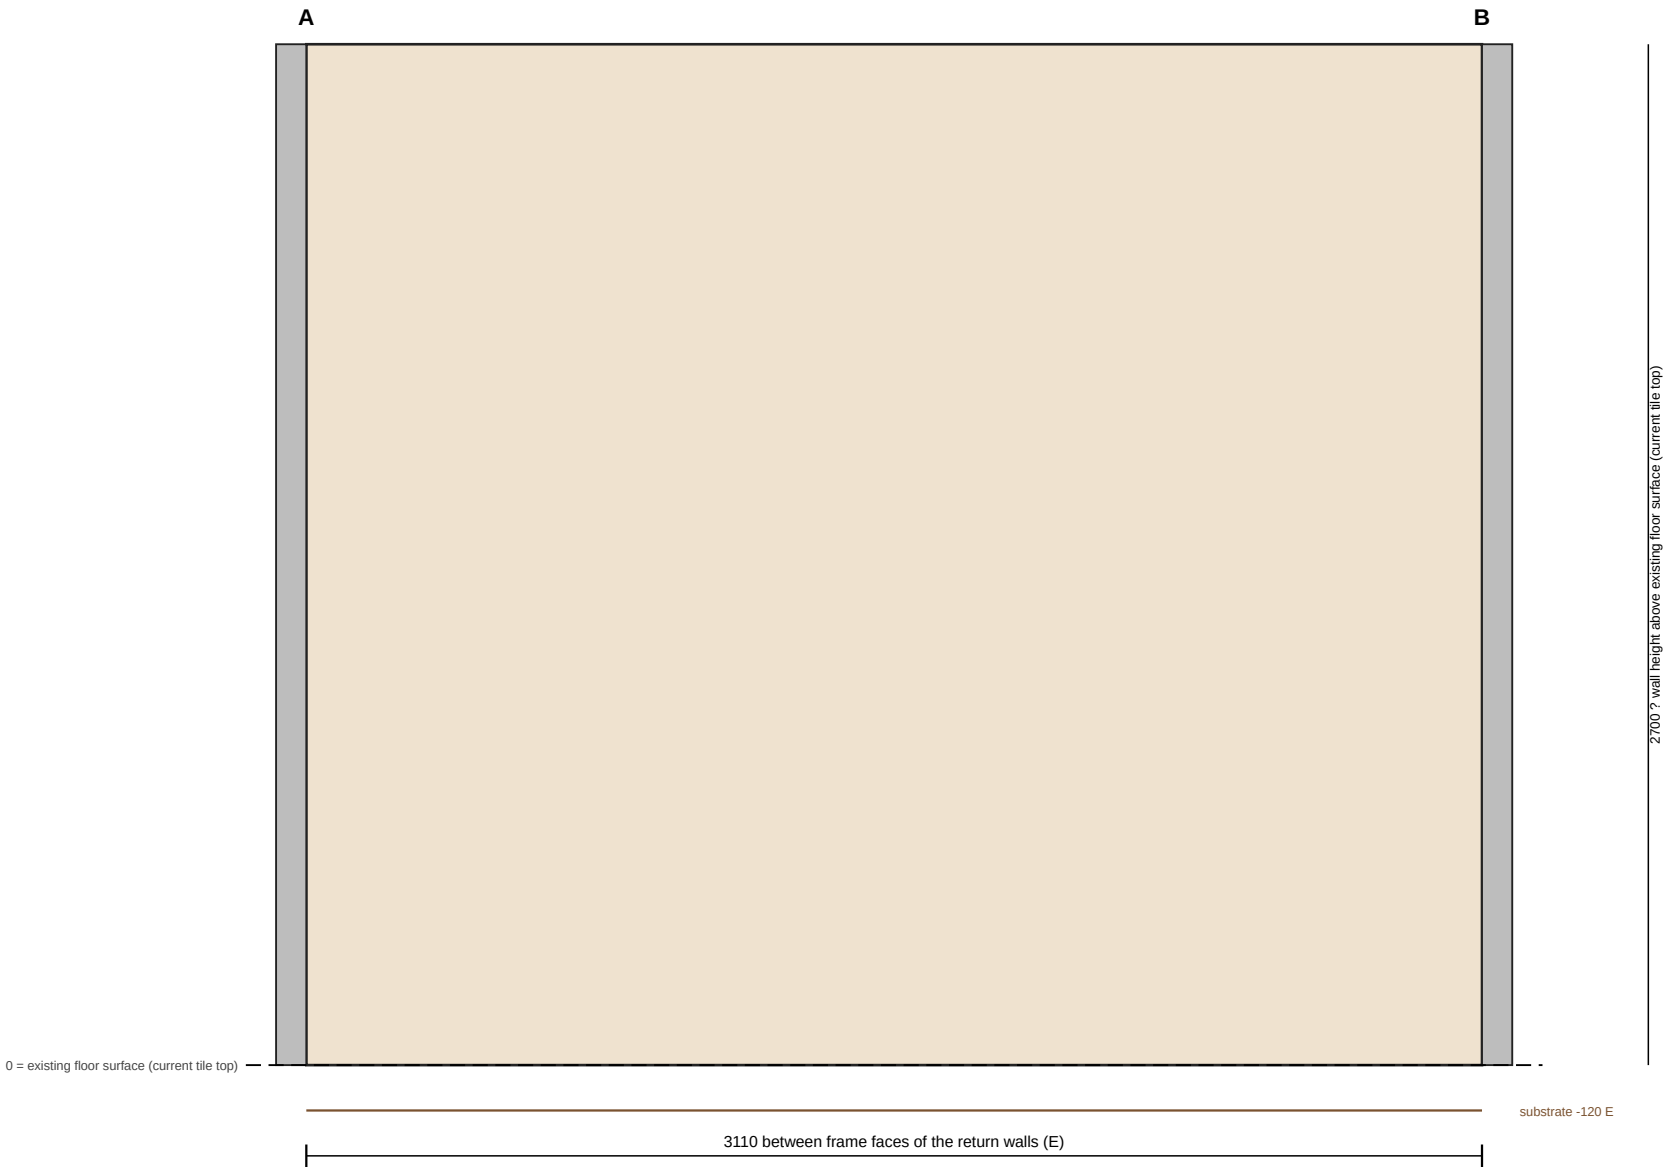

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Stage: 1. Post-demolition: frame and slab

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_e (right side) at 5 E along the drawn line.
End B: Frame face of wall_w (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 1. Post-demolition: frame and slab


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_s (right side) at 5 E along the drawn line.
End B: Frame face of wall_n (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

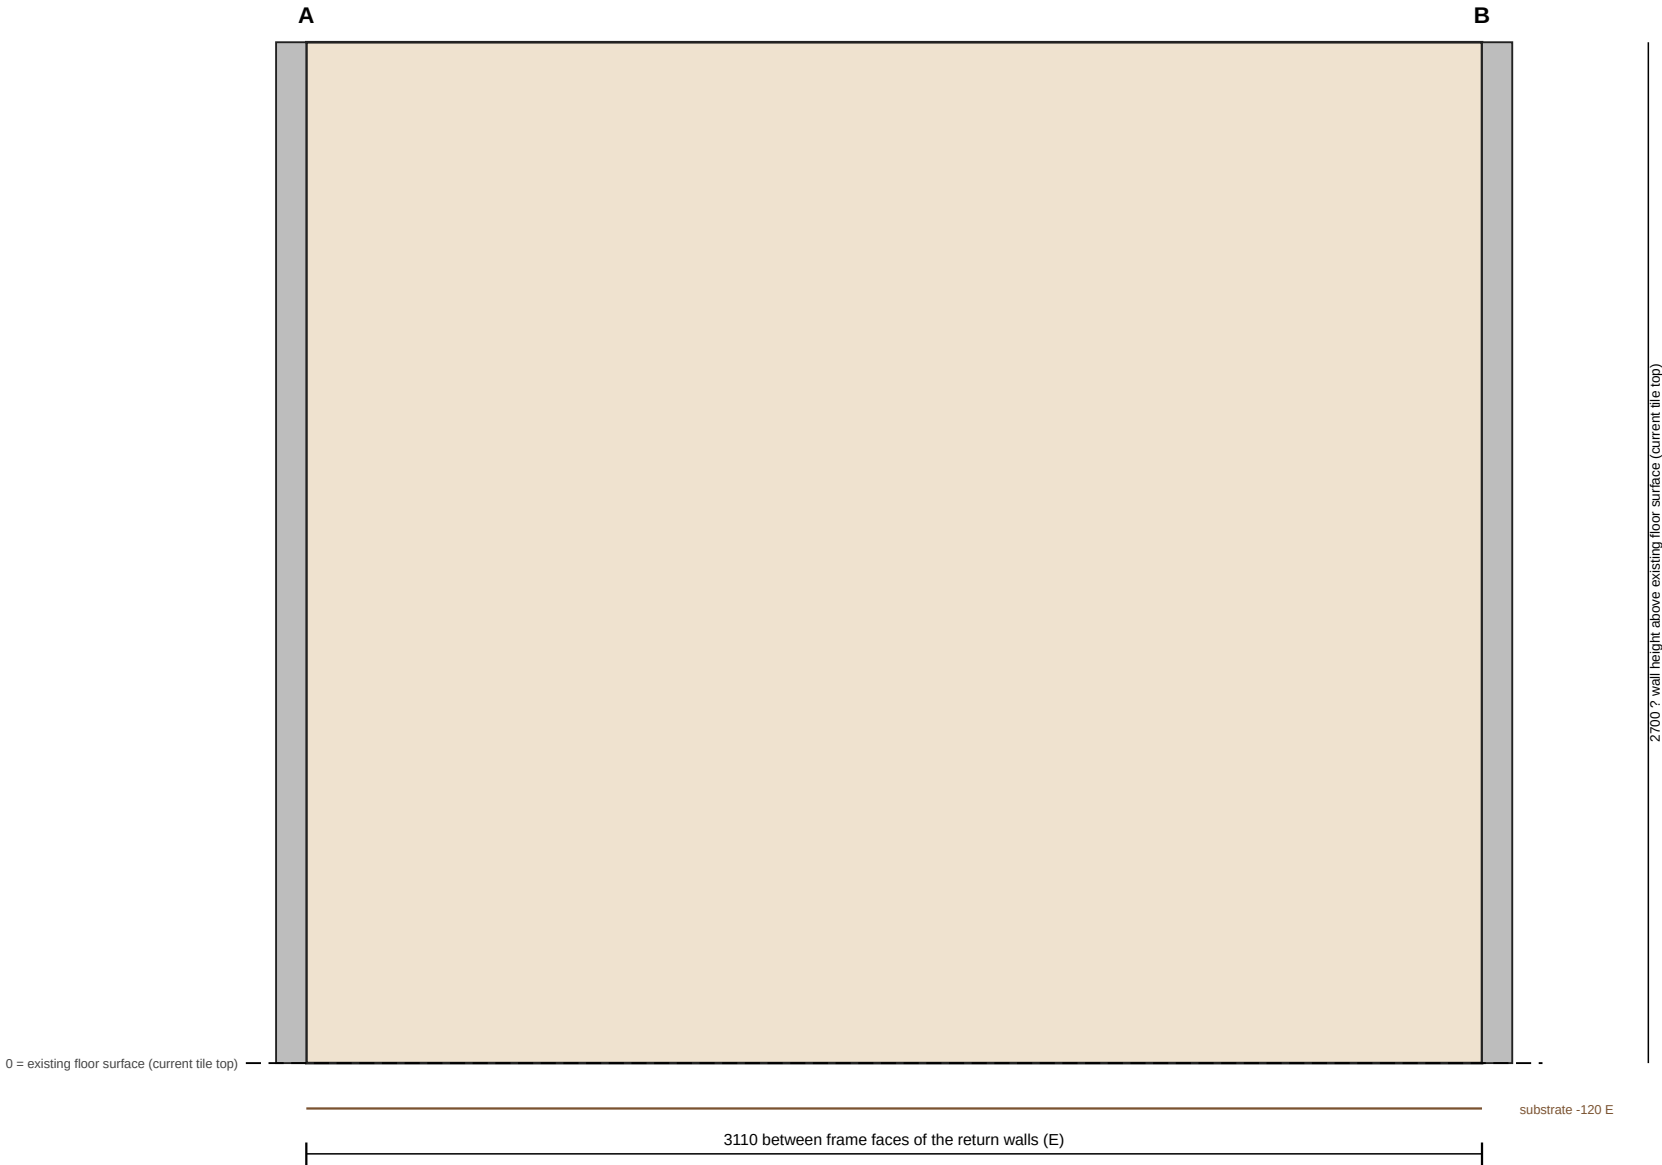


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

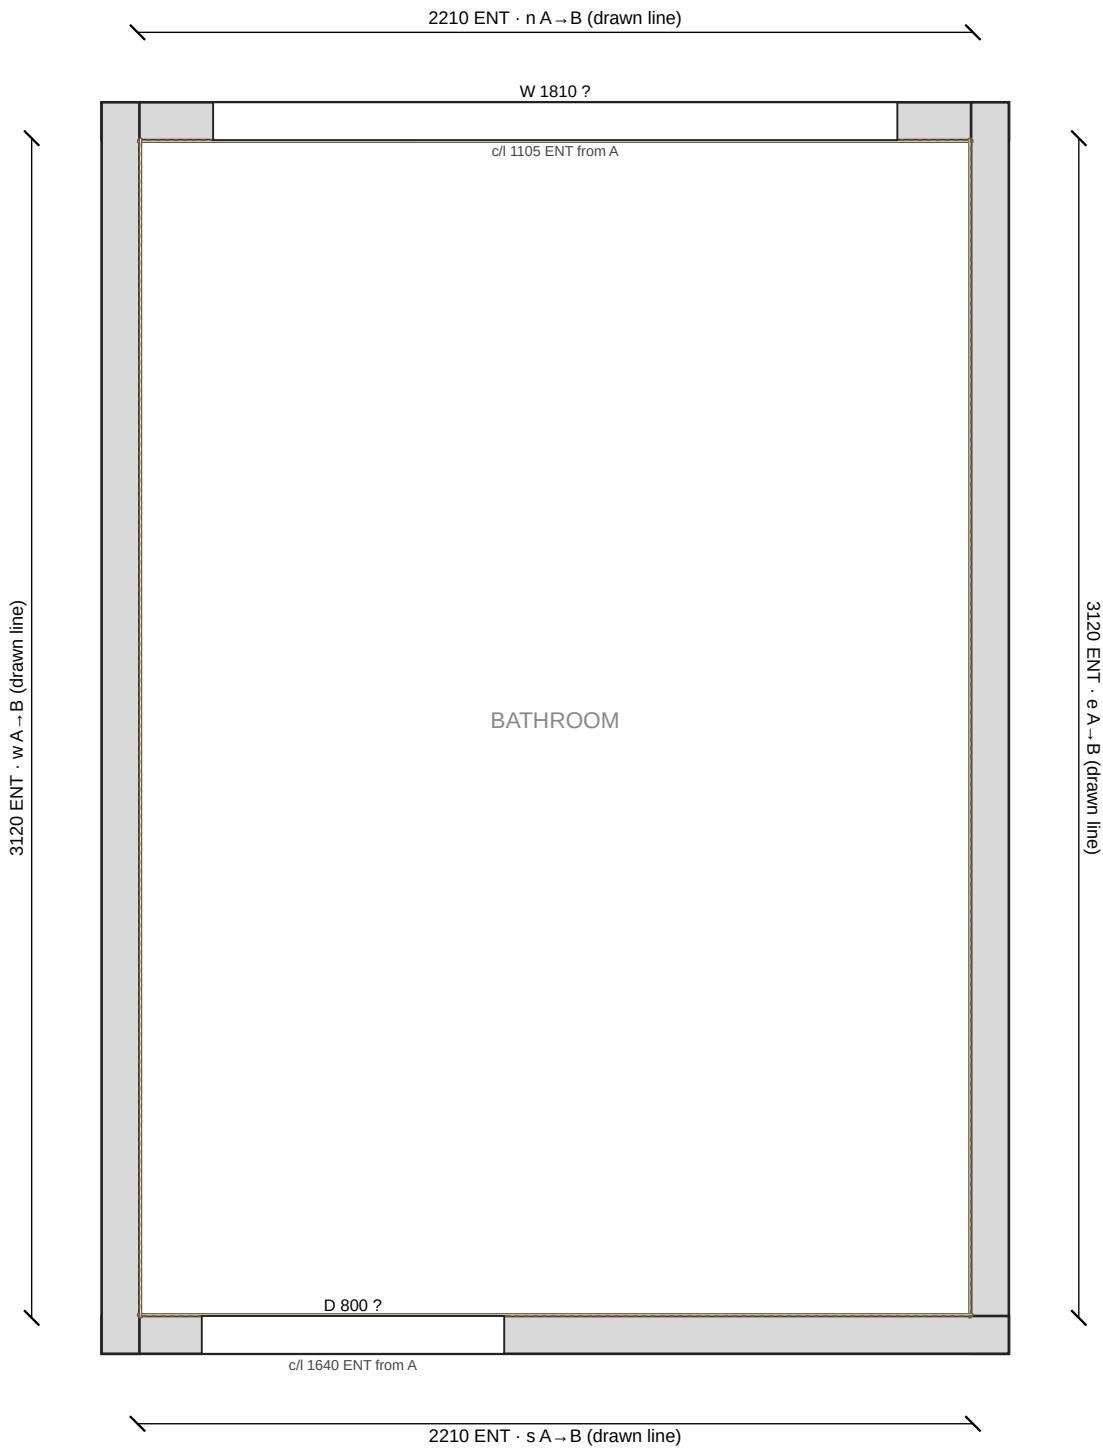

Stage: 2. Frame prep: board lined to the frame

Shows 16 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: frame face: frame face position 5 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: frame face: frame face position 5 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: frame face: frame face position 5 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)


Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E

Unresolved in this view (0)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 2. Frame prep: board lined to the frame
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

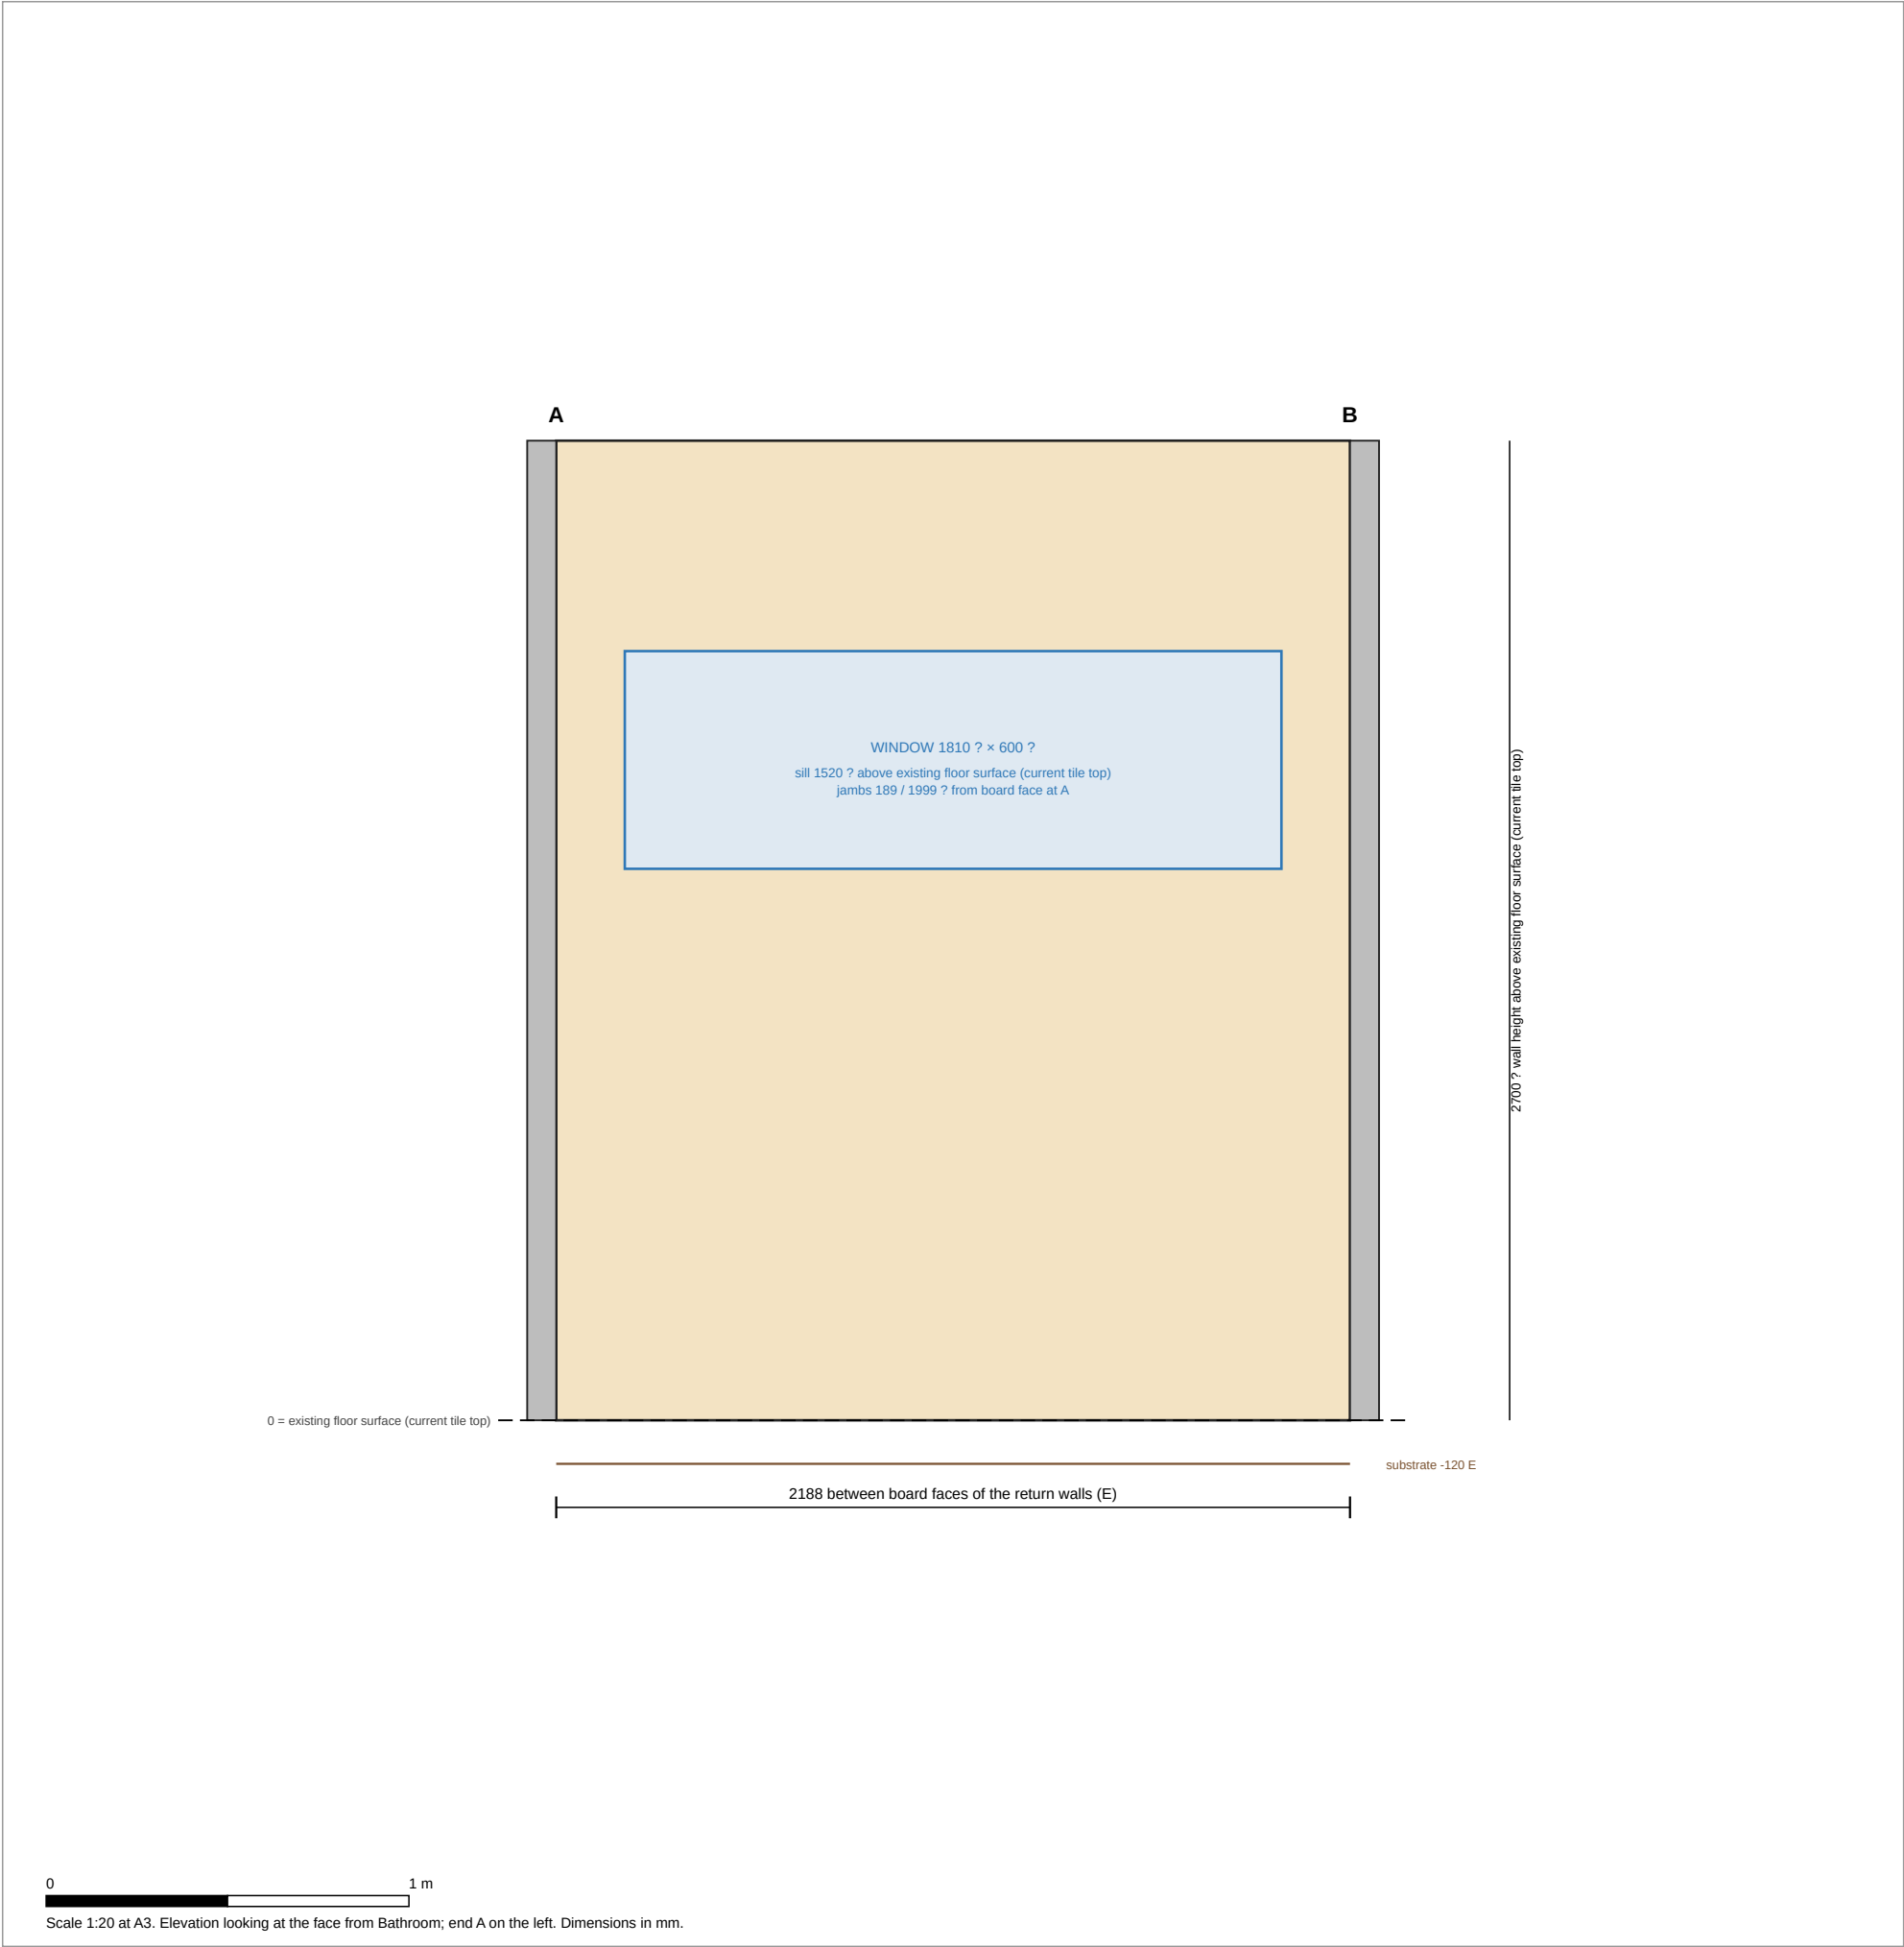

Stage: 2. Frame prep: board lined to the frame

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall_w_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 2. Frame prep: board lined to the frame


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

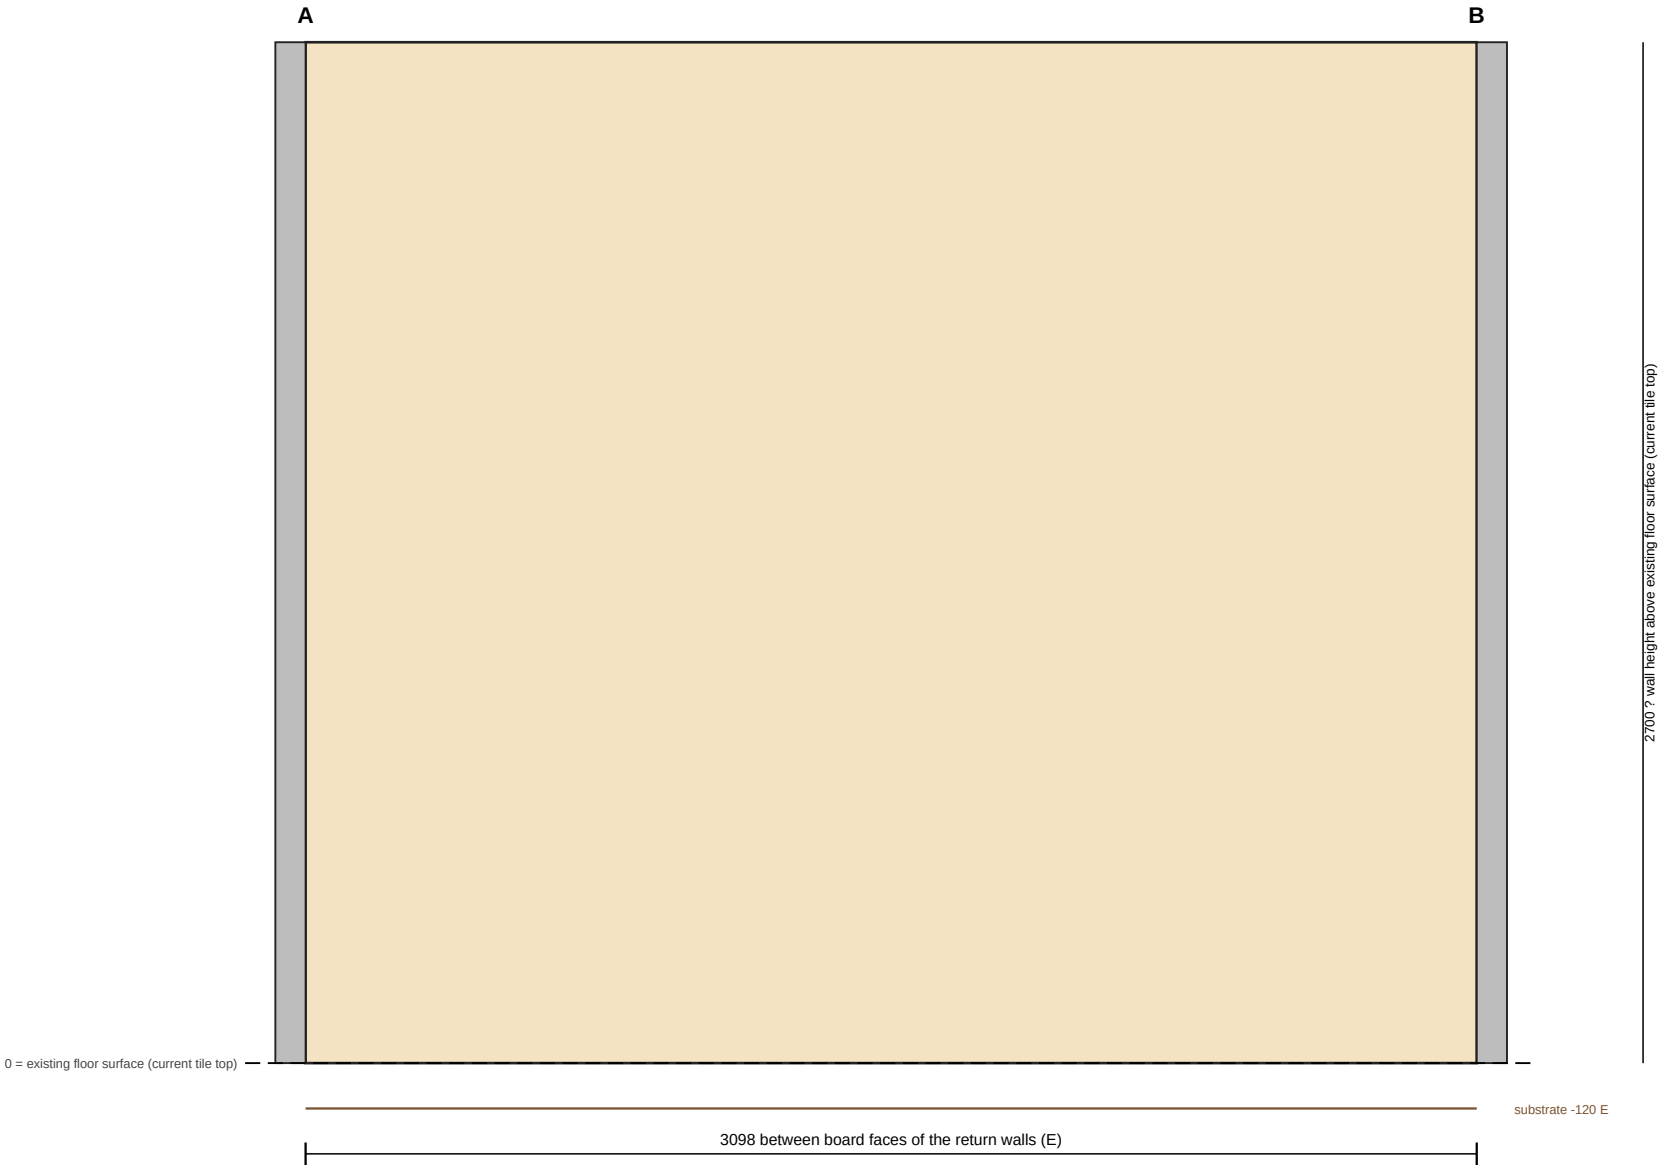

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.



Stage: 2. Frame prep: board lined to the frame

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 2. Frame prep: board lined to the frame · wall wall_s, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 2. Frame prep: board lined to the frame


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

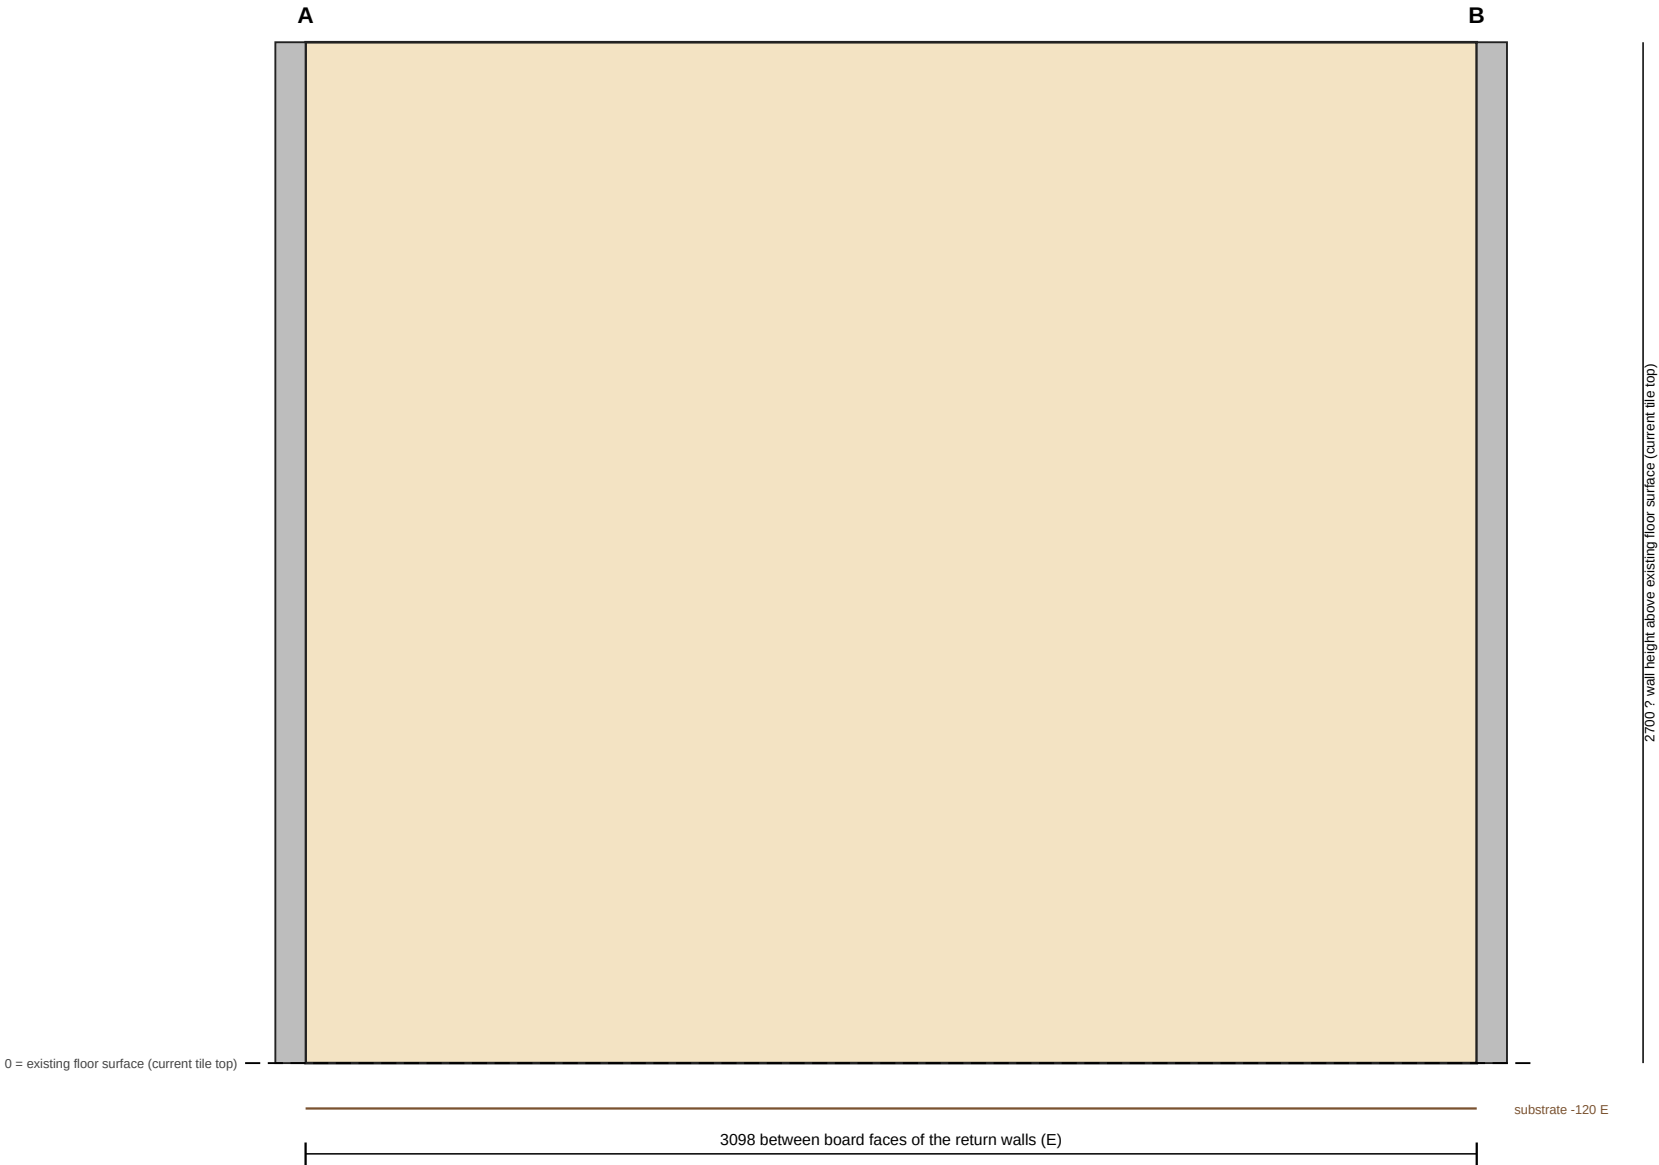


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

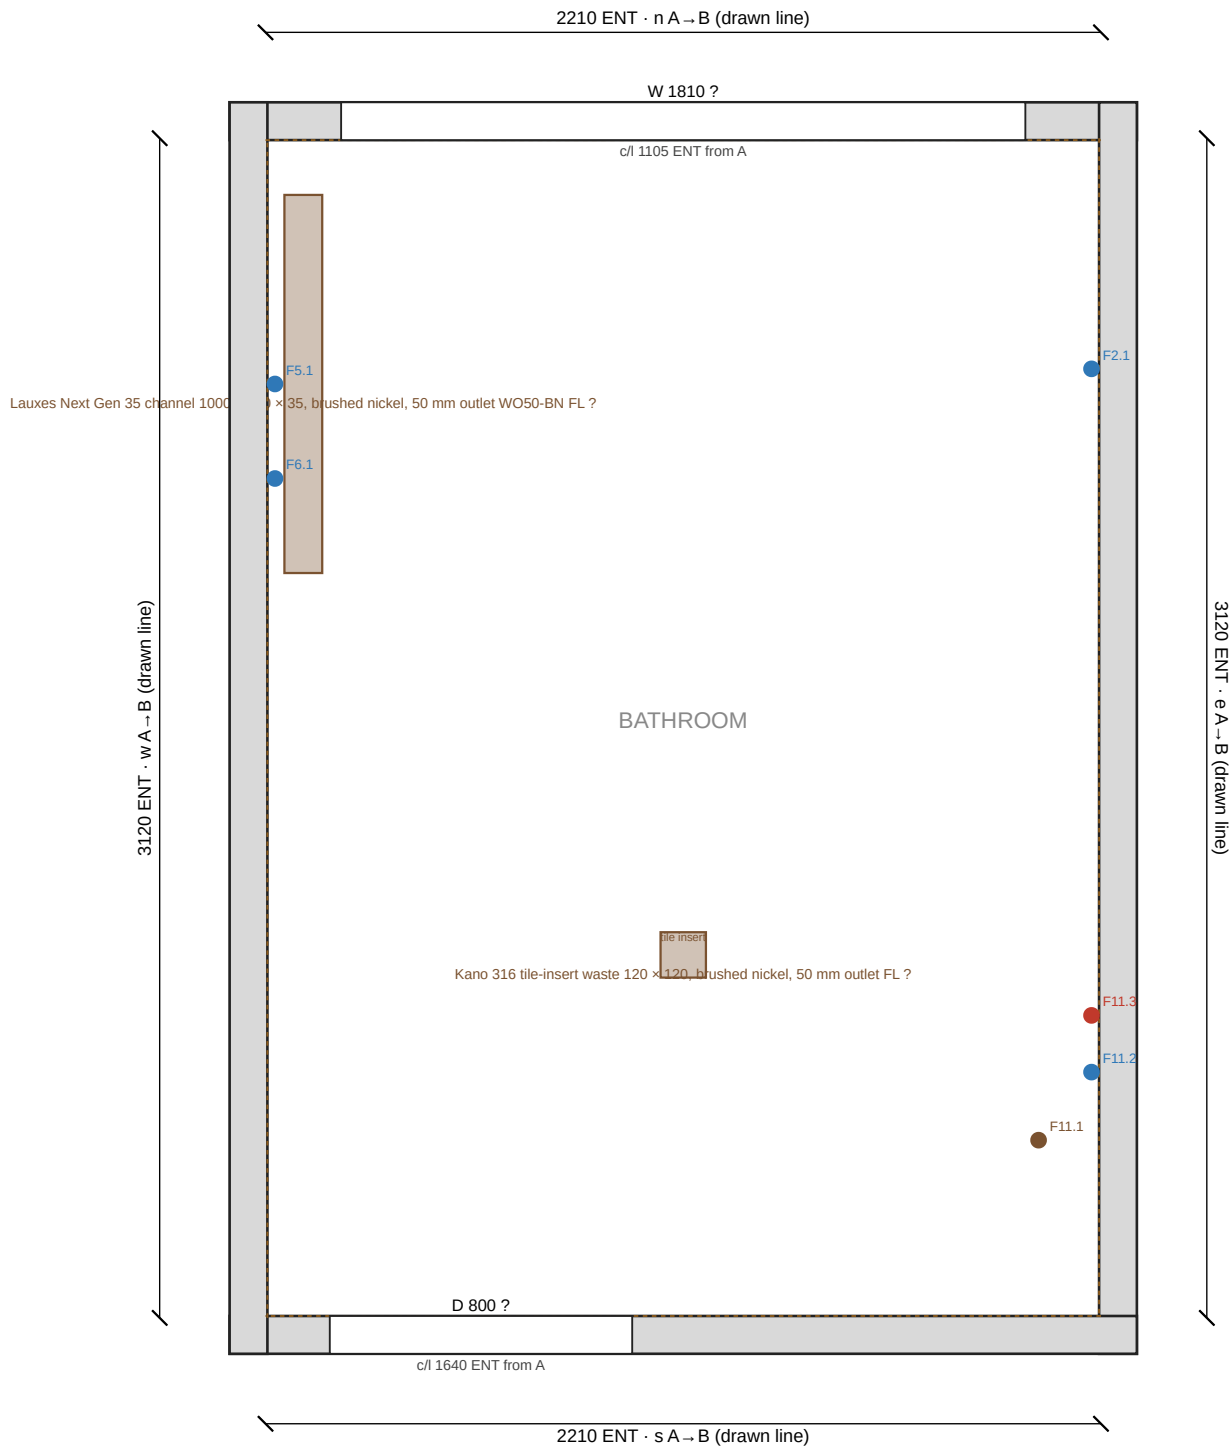

Stage: 3. Rough-in: drains and service points

Shows 20 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall e right: frame face: frame face position 5 E
Wall s right: frame face: frame face position 5 E
Wall w right: frame face: frame face position 5 E

Floor (mm above datum)

Bathroom floor: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?

Rough-in (as entered, from the named face)

Bath mixer and spout: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): out from finished face 0 P · across from fixture centreline 60 P · up from finished floor 750 P · along from end A 610 P
Shower system: G1/2 inlet at the upper wall rose (on the rail centreline): out from finished face 0 P · across from fixture centreline 0 P · up from finished floor 1700 P · along from end A 2470 P
Shower mixer: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): out from finished face 0 P · across from fixture centreline 0 P · up from finished floor 1000 P · along from end A 2220 E
Toilet: Pan waste, S-trap (floor): out from finished face 140–260 PUB · across from fixture centreline 0 PUB · up from finished floor ? · along from end A 2650 P
Toilet: Cold water point (stop tap): out from finished face 0 PUB · across from fixture centreline -180 PUB · up from finished floor 180 PUB · along from end A 2470 P
Toilet: SpaLet seat power point: out from finished face 0 PUB · across from fixture centreline -330 PUB · up from finished floor 300 PUB · along from end A 2320 P


Unresolved in this view (6)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Toilet: Pan waste, S-trap (floor): up from finished floor (mm) unknown; printed as "?" (missing up height).

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 3. Rough-in: drains and service points
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

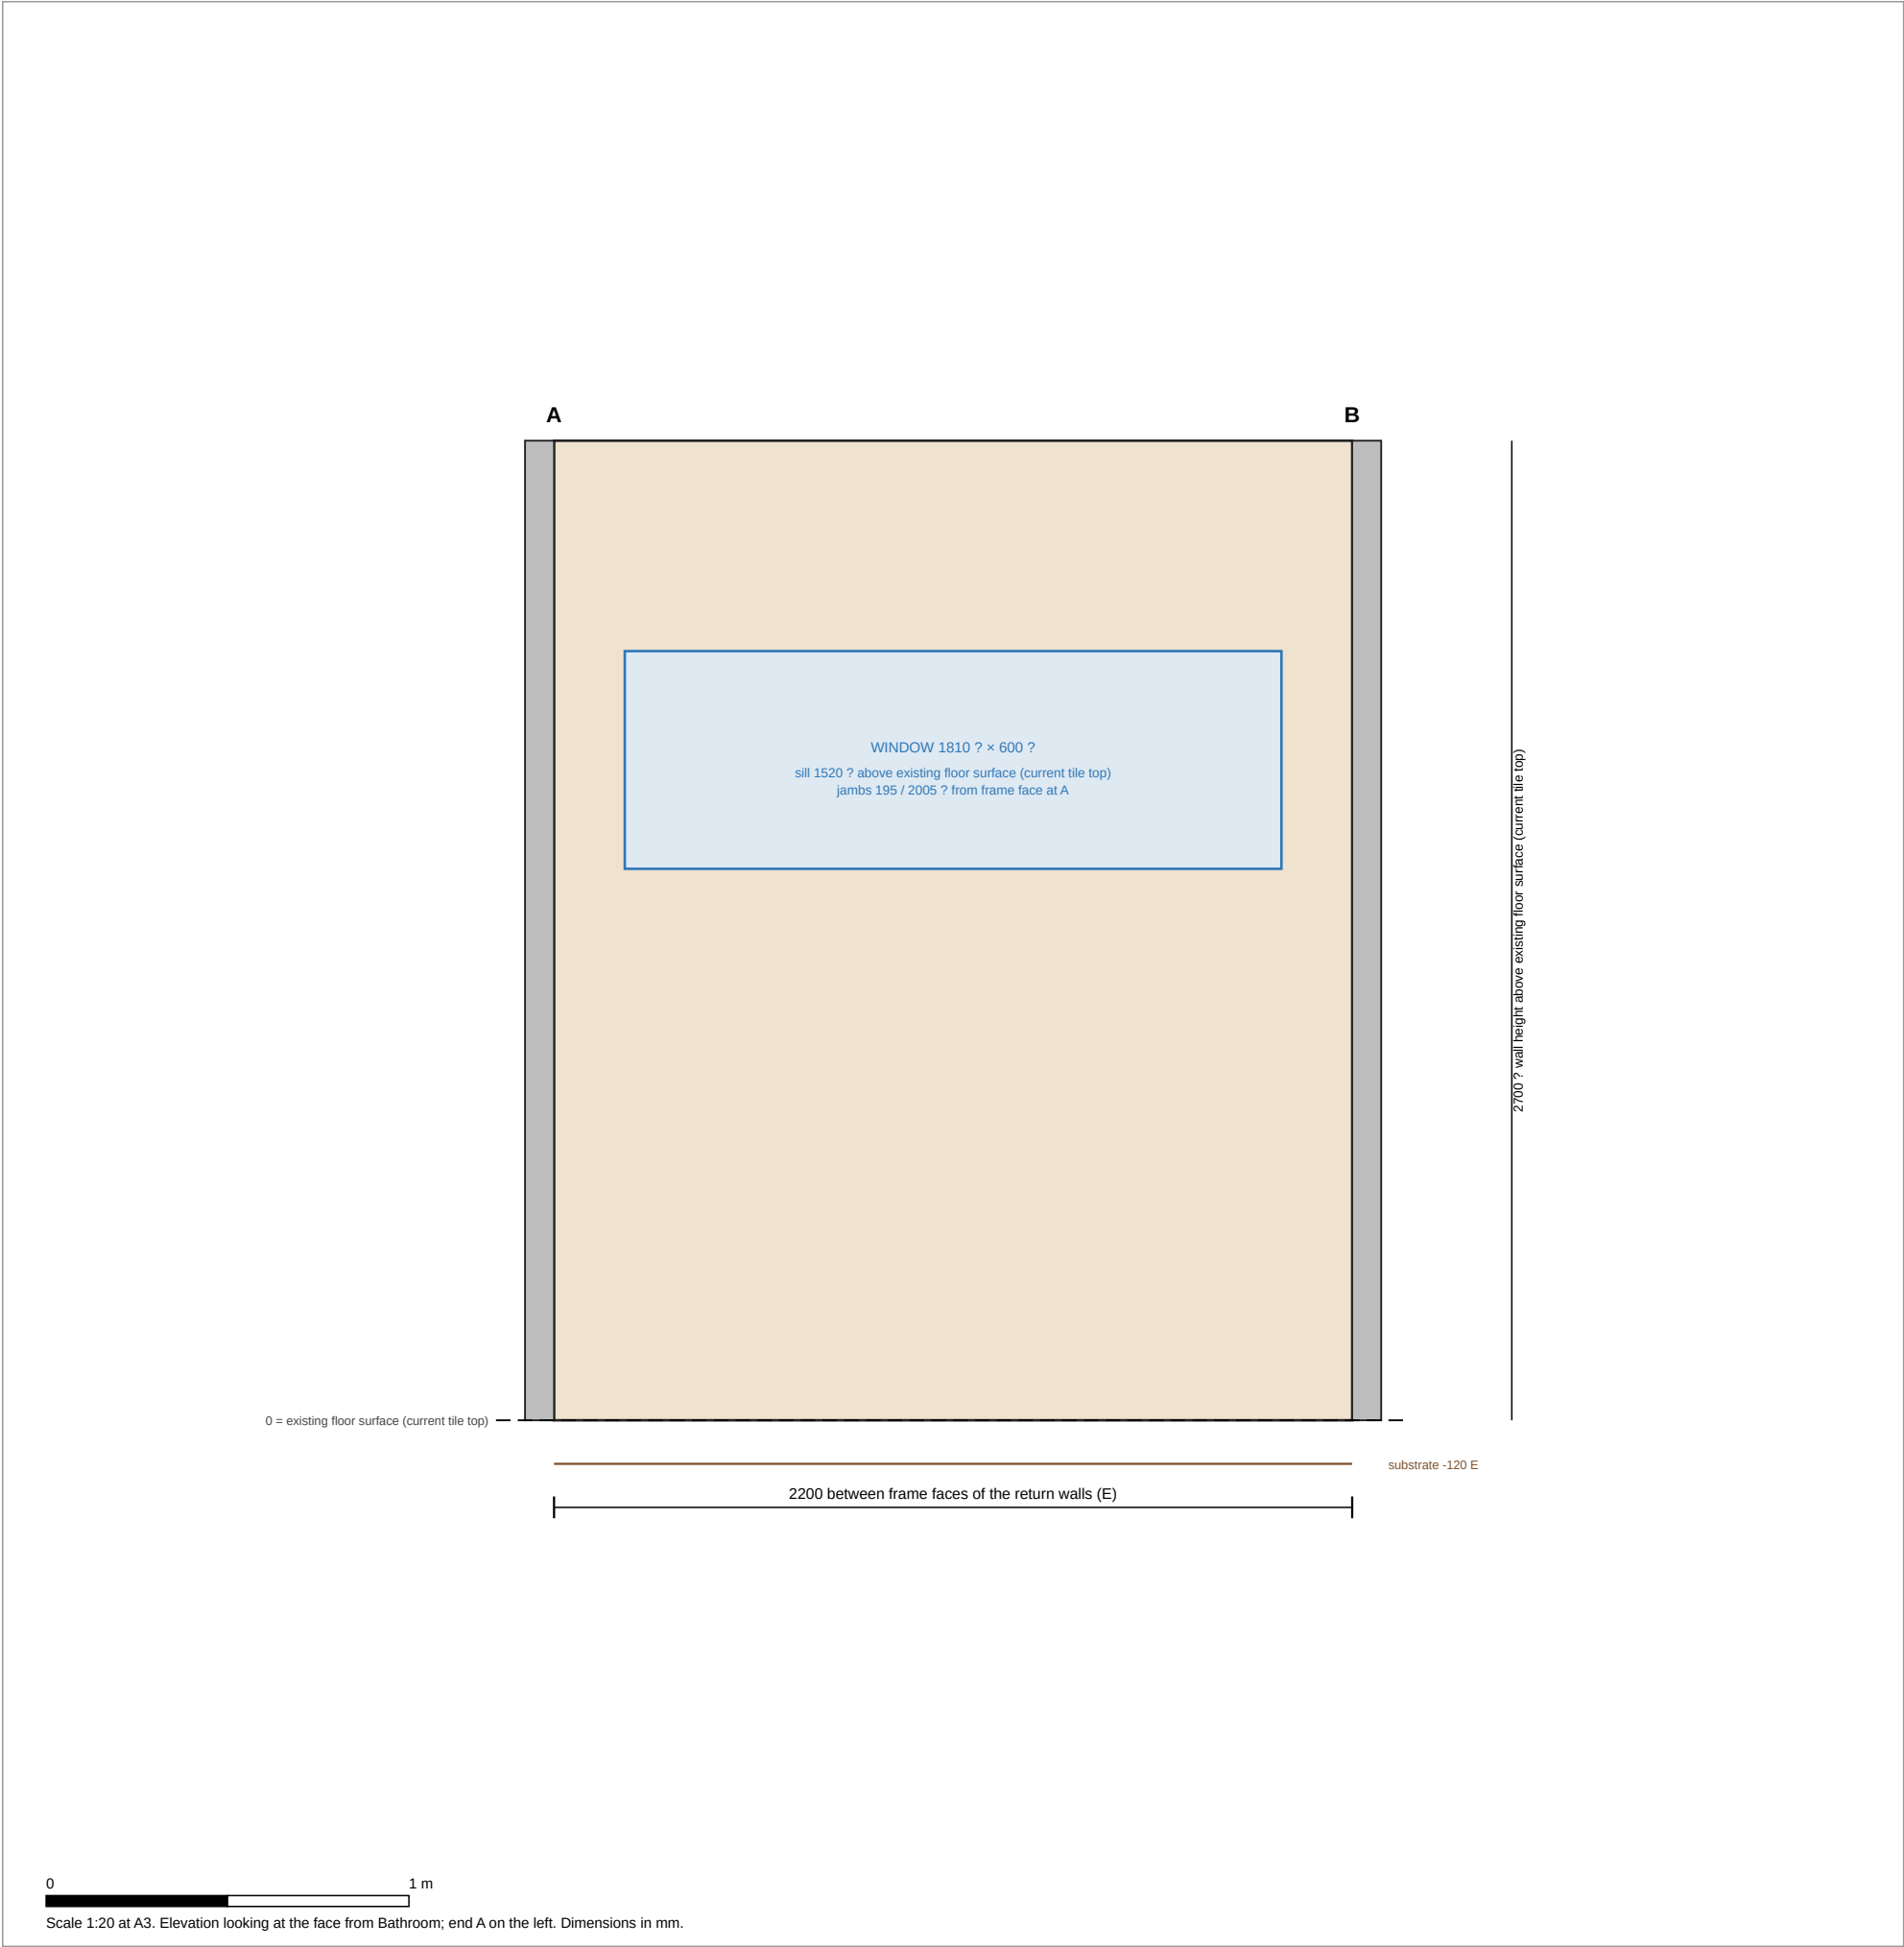

Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Stage: 3. Rough-in: drains and service points

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_w (right side) at 5 E along the drawn line.
End B: Frame face of wall_e (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 3. Rough-in: drains and service points

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_n (right side) at 5 E along the drawn line.
End B: Frame face of wall_s (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Service points (AFF = above finished floor)

F2.1 water · Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): 605 E from frame face at A · 750 P above finished floor · 0 P out from finished face
F11.1 waste · Pan waste, S-trap (floor): 2645 E from frame face at A · up ? · 140–260 PUB out from finished face
F11.2 water · Cold water point (stop tap): 2465 E from frame face at A · 180 PUB above finished floor · 0 PUB out from finished face
F11.3 power · SpaLet seat power point: 2315 E from frame face at A · 300 PUB above finished floor · 0 PUB out from finished face



Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Stage: 3. Rough-in: drains and service points

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_e (right side) at 5 E along the drawn line.
End B: Frame face of wall_w (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 3. Rough-in: drains and service points · wall wall_s, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 3. Rough-in: drains and service points

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_s (right side) at 5 E along the drawn line.
End B: Frame face of wall_n (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Service points (AFF = above finished floor)

F5.1 water · G1/2 inlet at the upper wall rose (on the rail centreline): 2465 E from frame face at A · 1700 P above finished floor · 0 P out from finished face
F6.1 water · Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): 2215 E from frame face at A · 1000 P above finished floor · 0 P out from finished face




0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

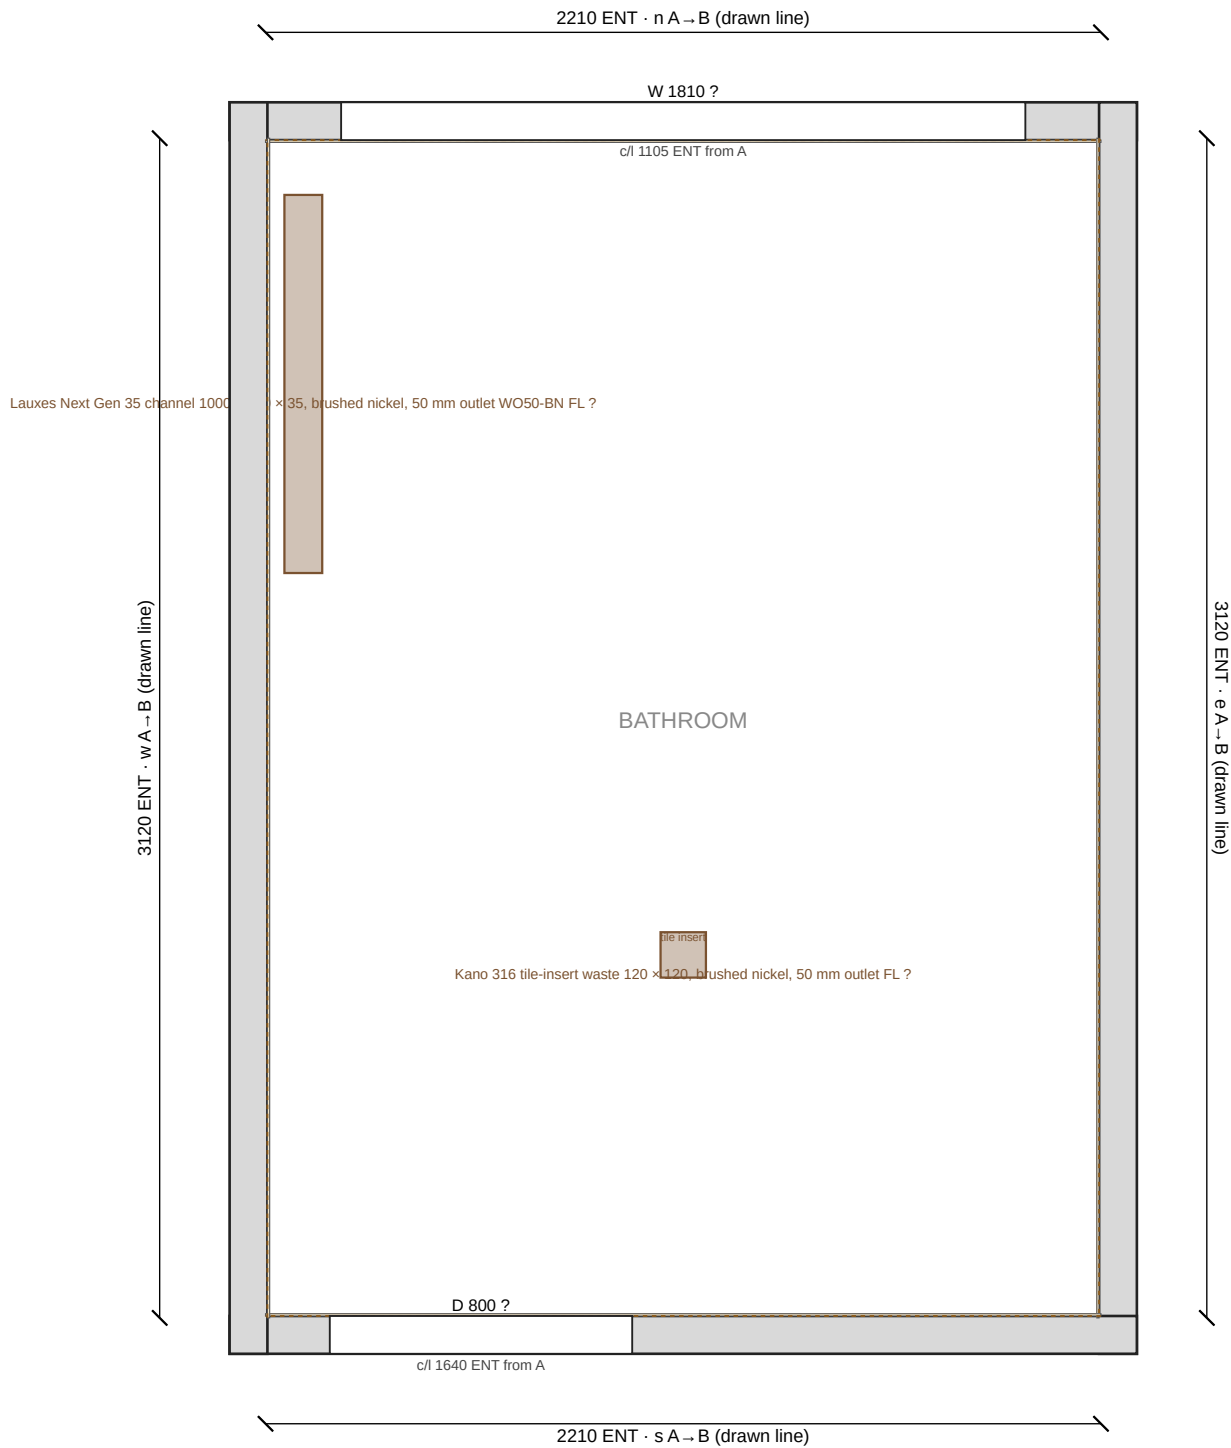

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

Stage: 4. Waterproofing: floor membrane only (stopgap)

Shows 19 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.
STOPGAP VIEW: not recorded
Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.
Drawn dashed as stand-ins: Floor waterproofing.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: frame face: frame face position 5 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: frame face: frame face position 5 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: frame face: frame face position 5 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?

Unresolved in this view (5)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 4. Waterproofing: floor membrane only (stopgap)
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face


Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall


substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

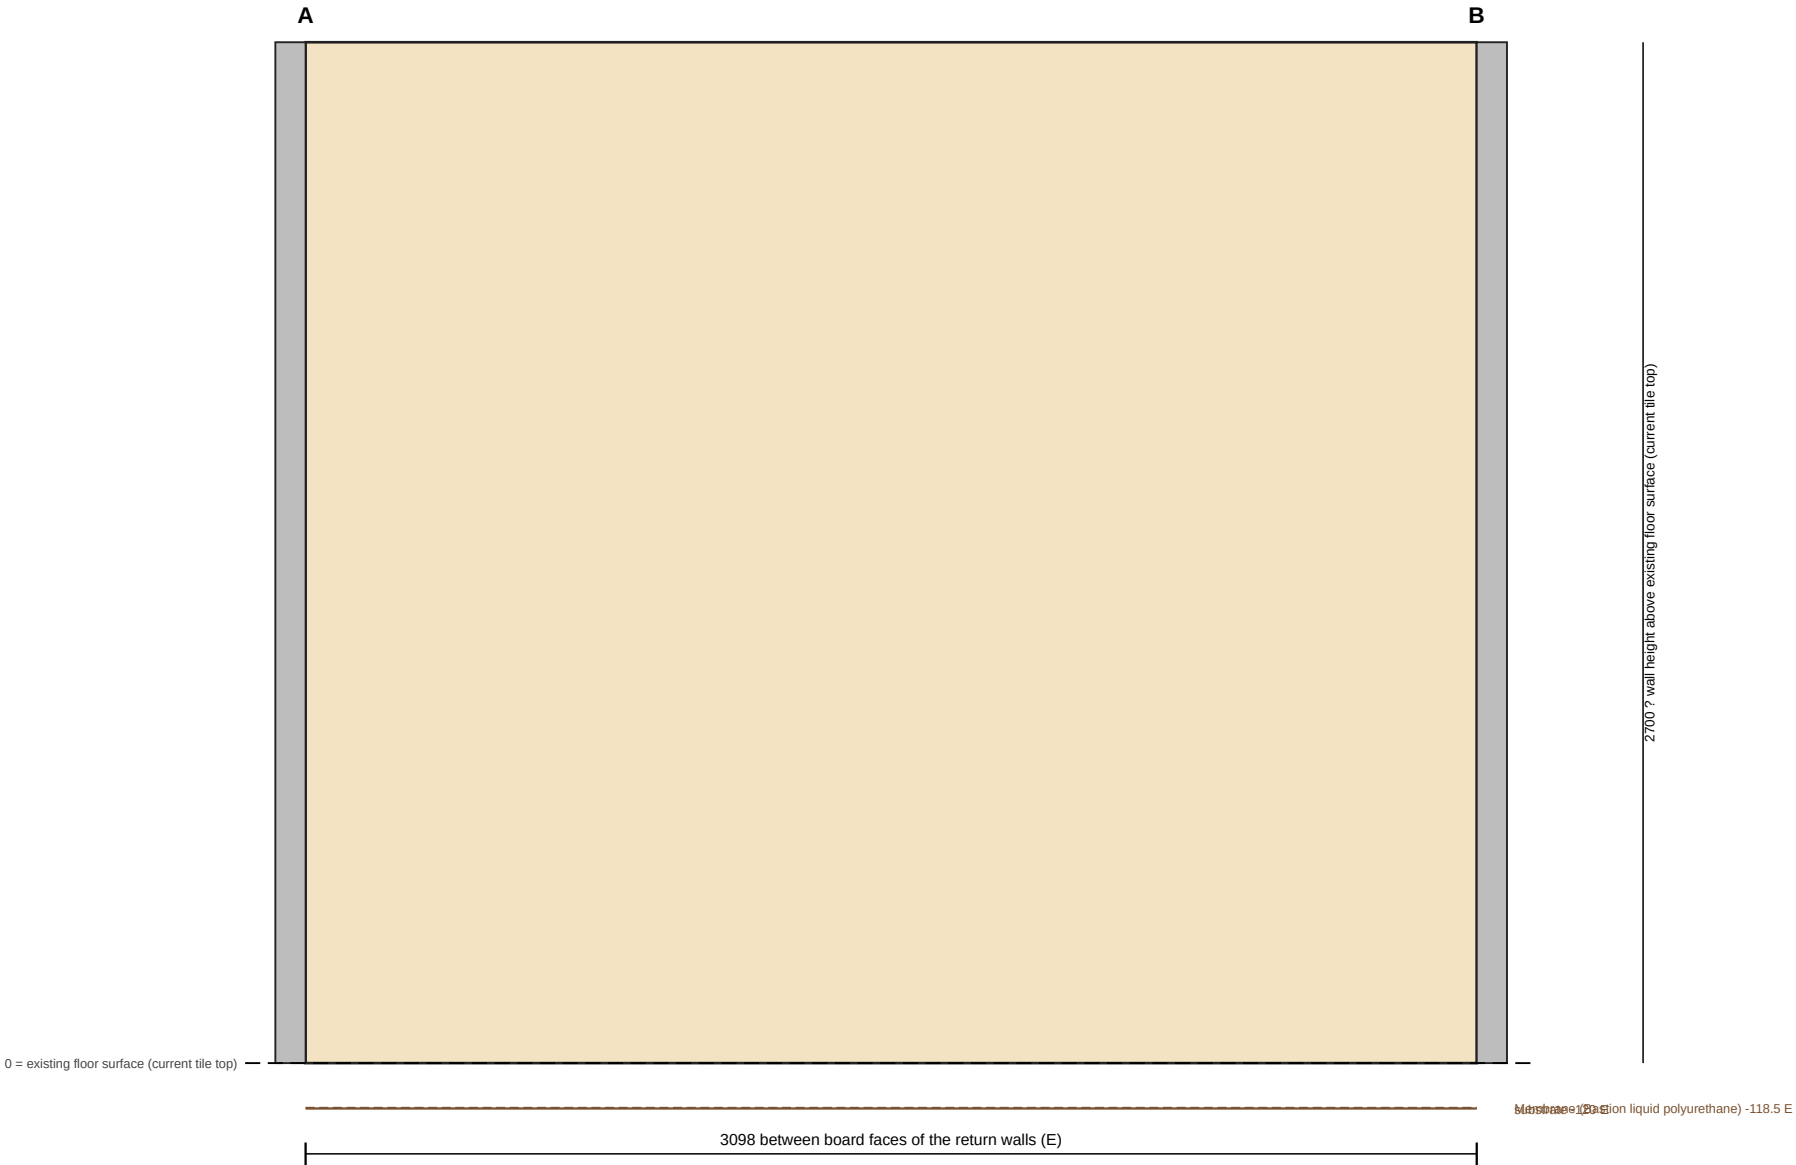

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

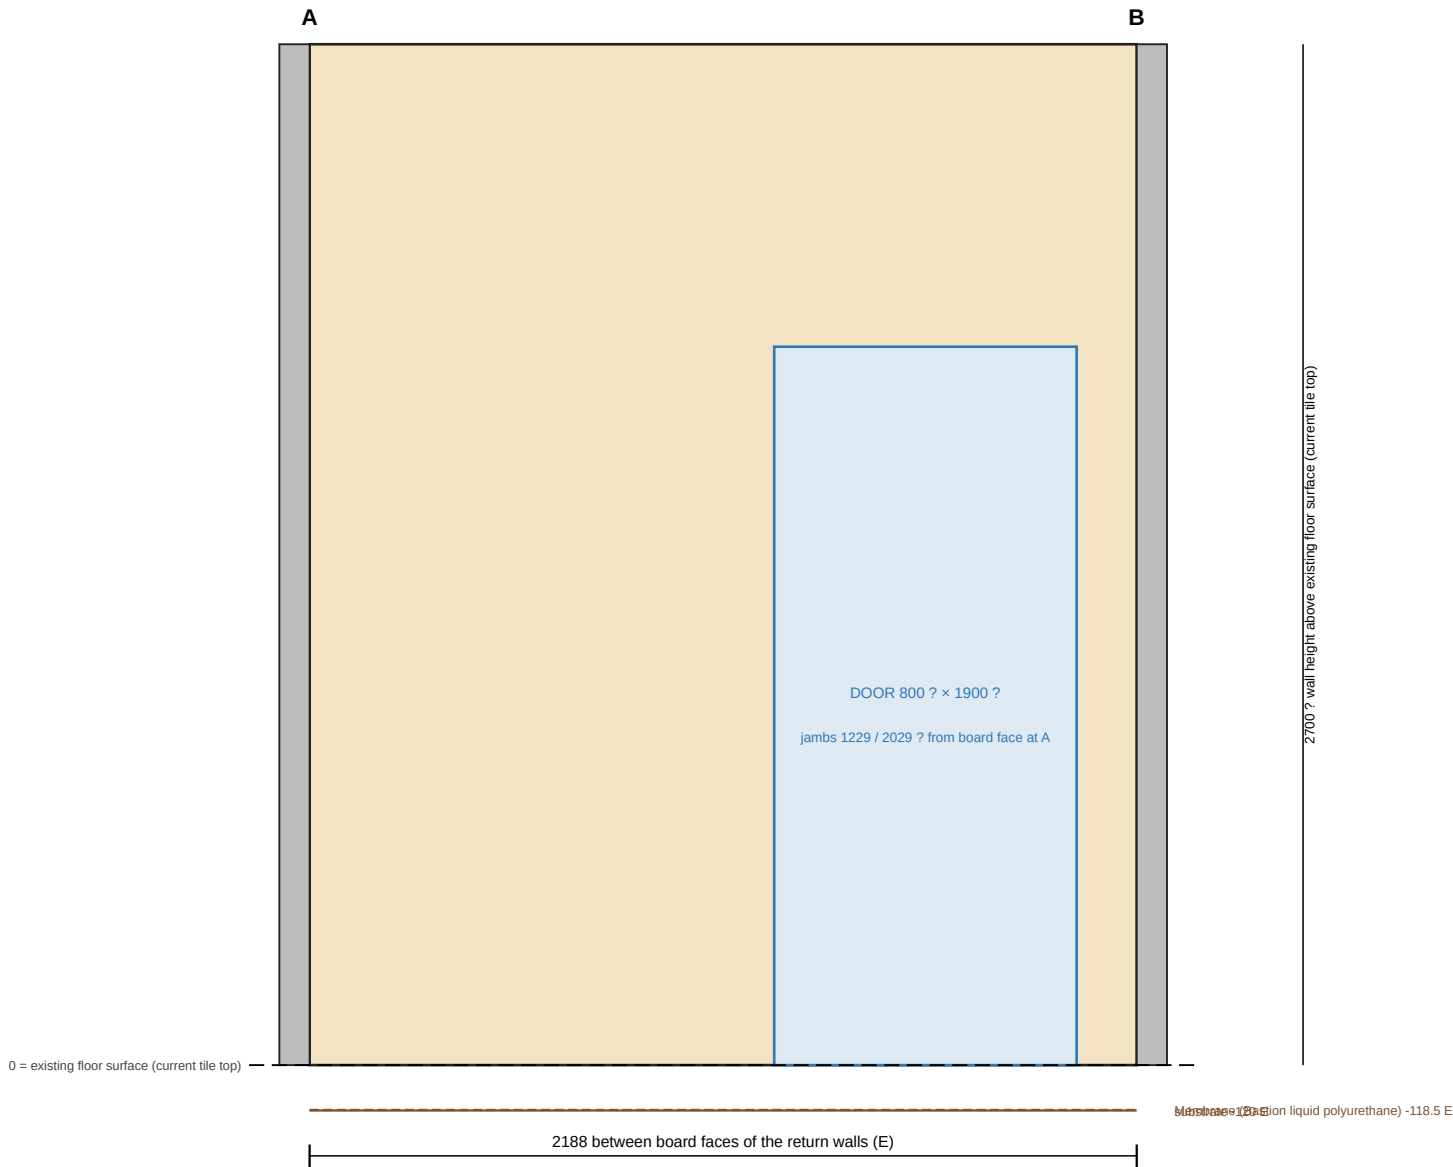

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face


Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

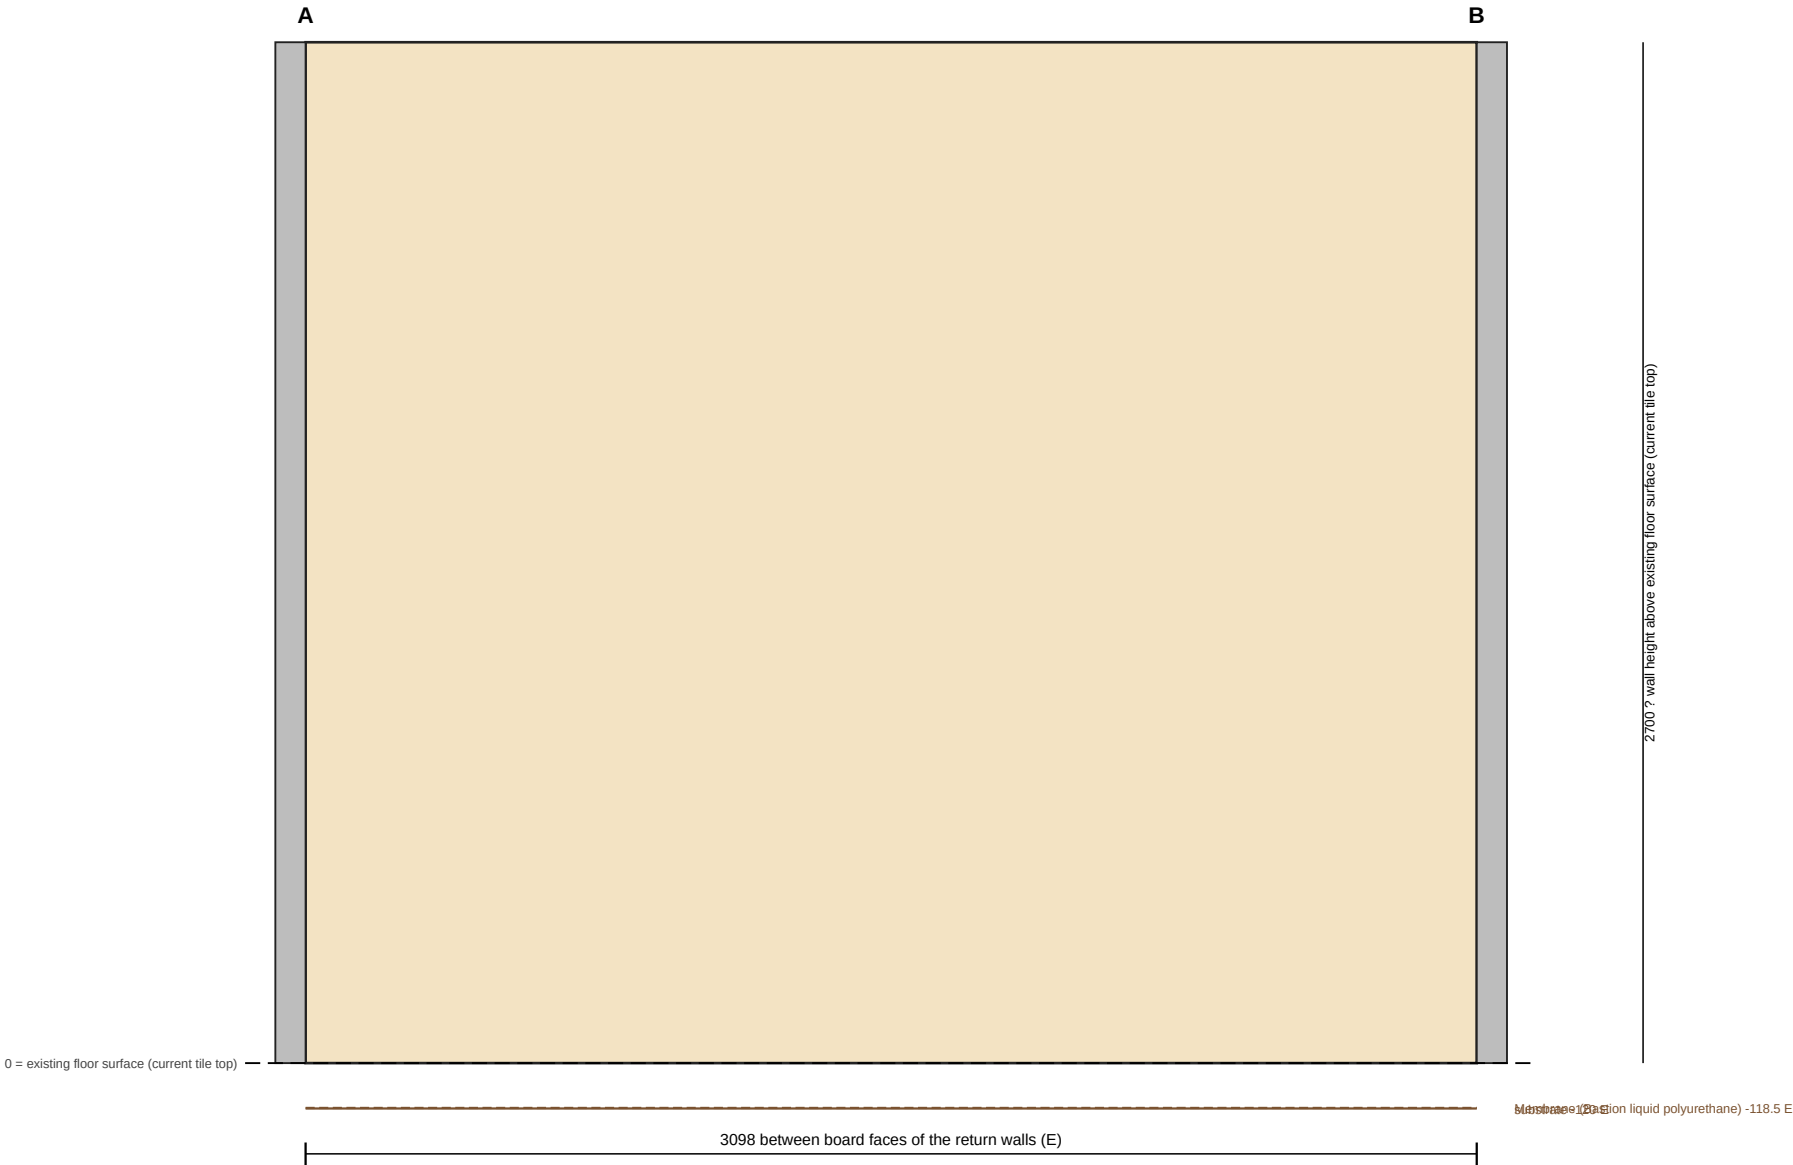


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

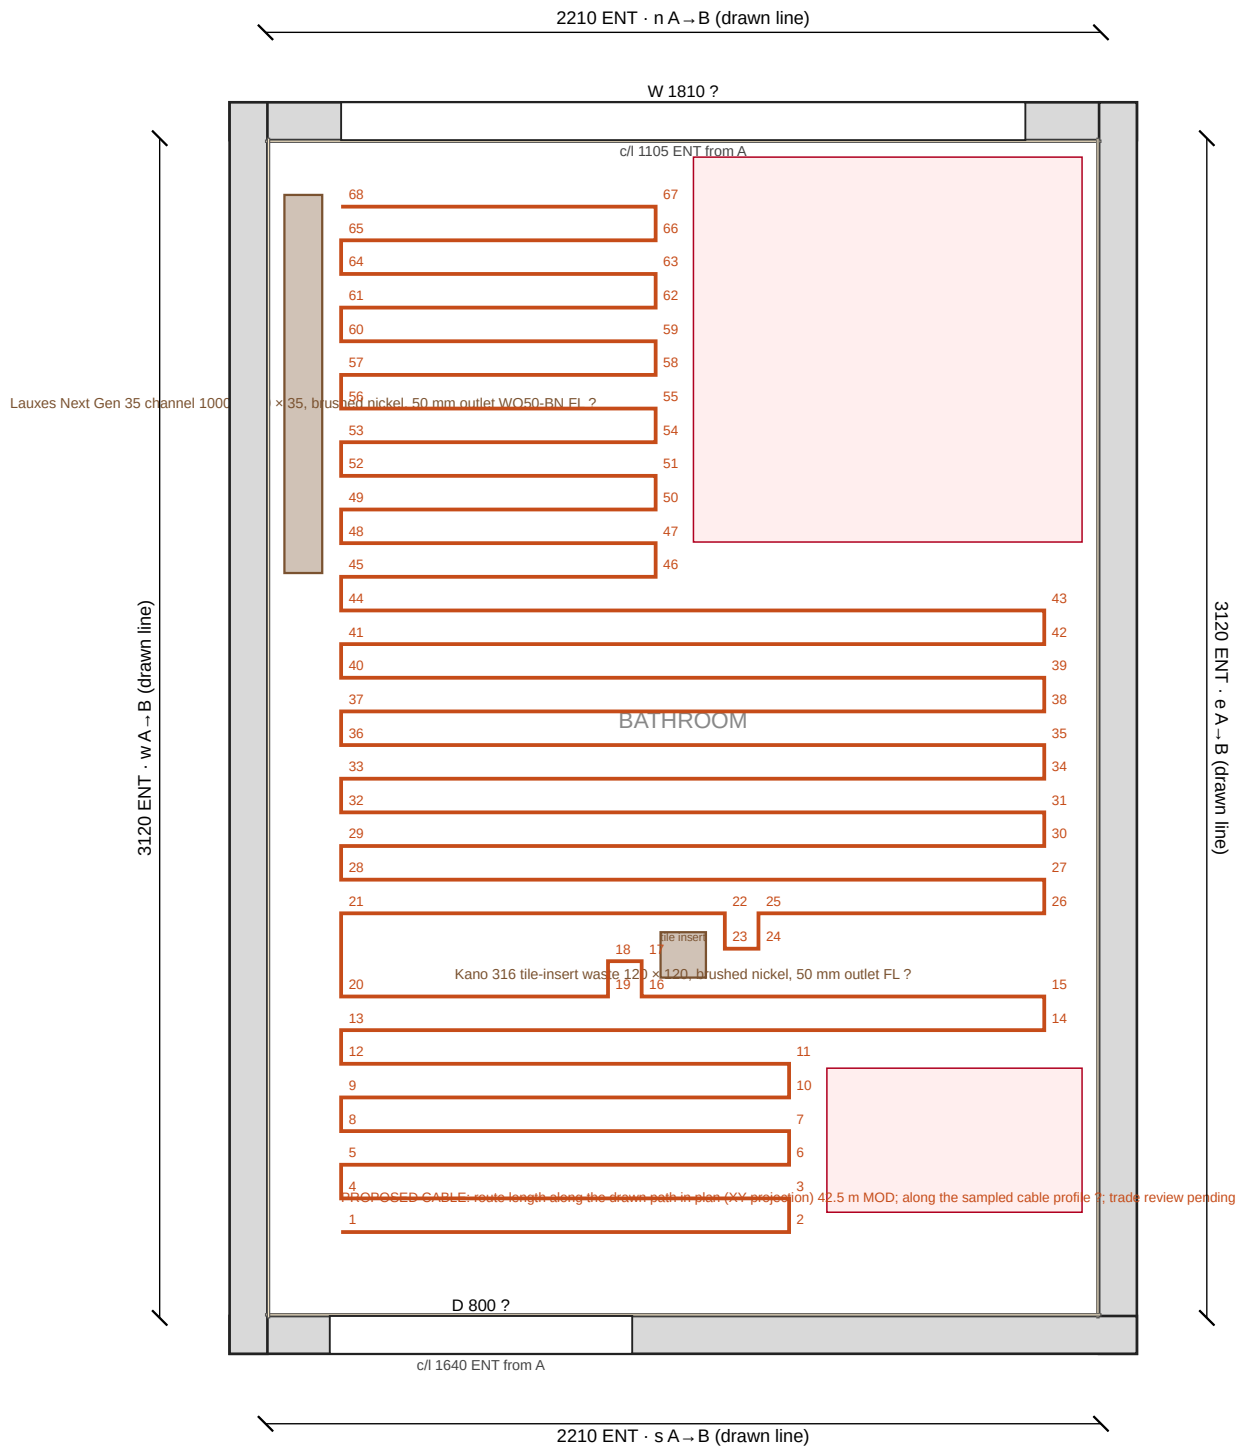

Stage: 5. Heating cable on the membrane

Shows 16 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E

Drainage / heating

Bathroom: proposed heating cable: manufacturer ? · model SCK0765L ENT · product length (m) 42.5 PUB · rated output (W) 765 PUB · derived spacing min 87.1 DER · derived spacing max 120 DER · plan route length (m) 42.5 MOD · spatial route length, sampled profile (m) ?
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN-FL ? · finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate 1000 × 100 M
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate 120 × 120 tile insert M

Unresolved in this view (15)

- Bathroom: proposed heating cable: heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- Bathroom: proposed heating cable: heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- Bathroom: proposed heating cable: heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- Bathroom: proposed heating cable: heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.
- Bathroom: proposed heating cable: manufacturer unknown; printed as "?" (missing manufacturer).

... 7 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 5. Heating cable on the membrane

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

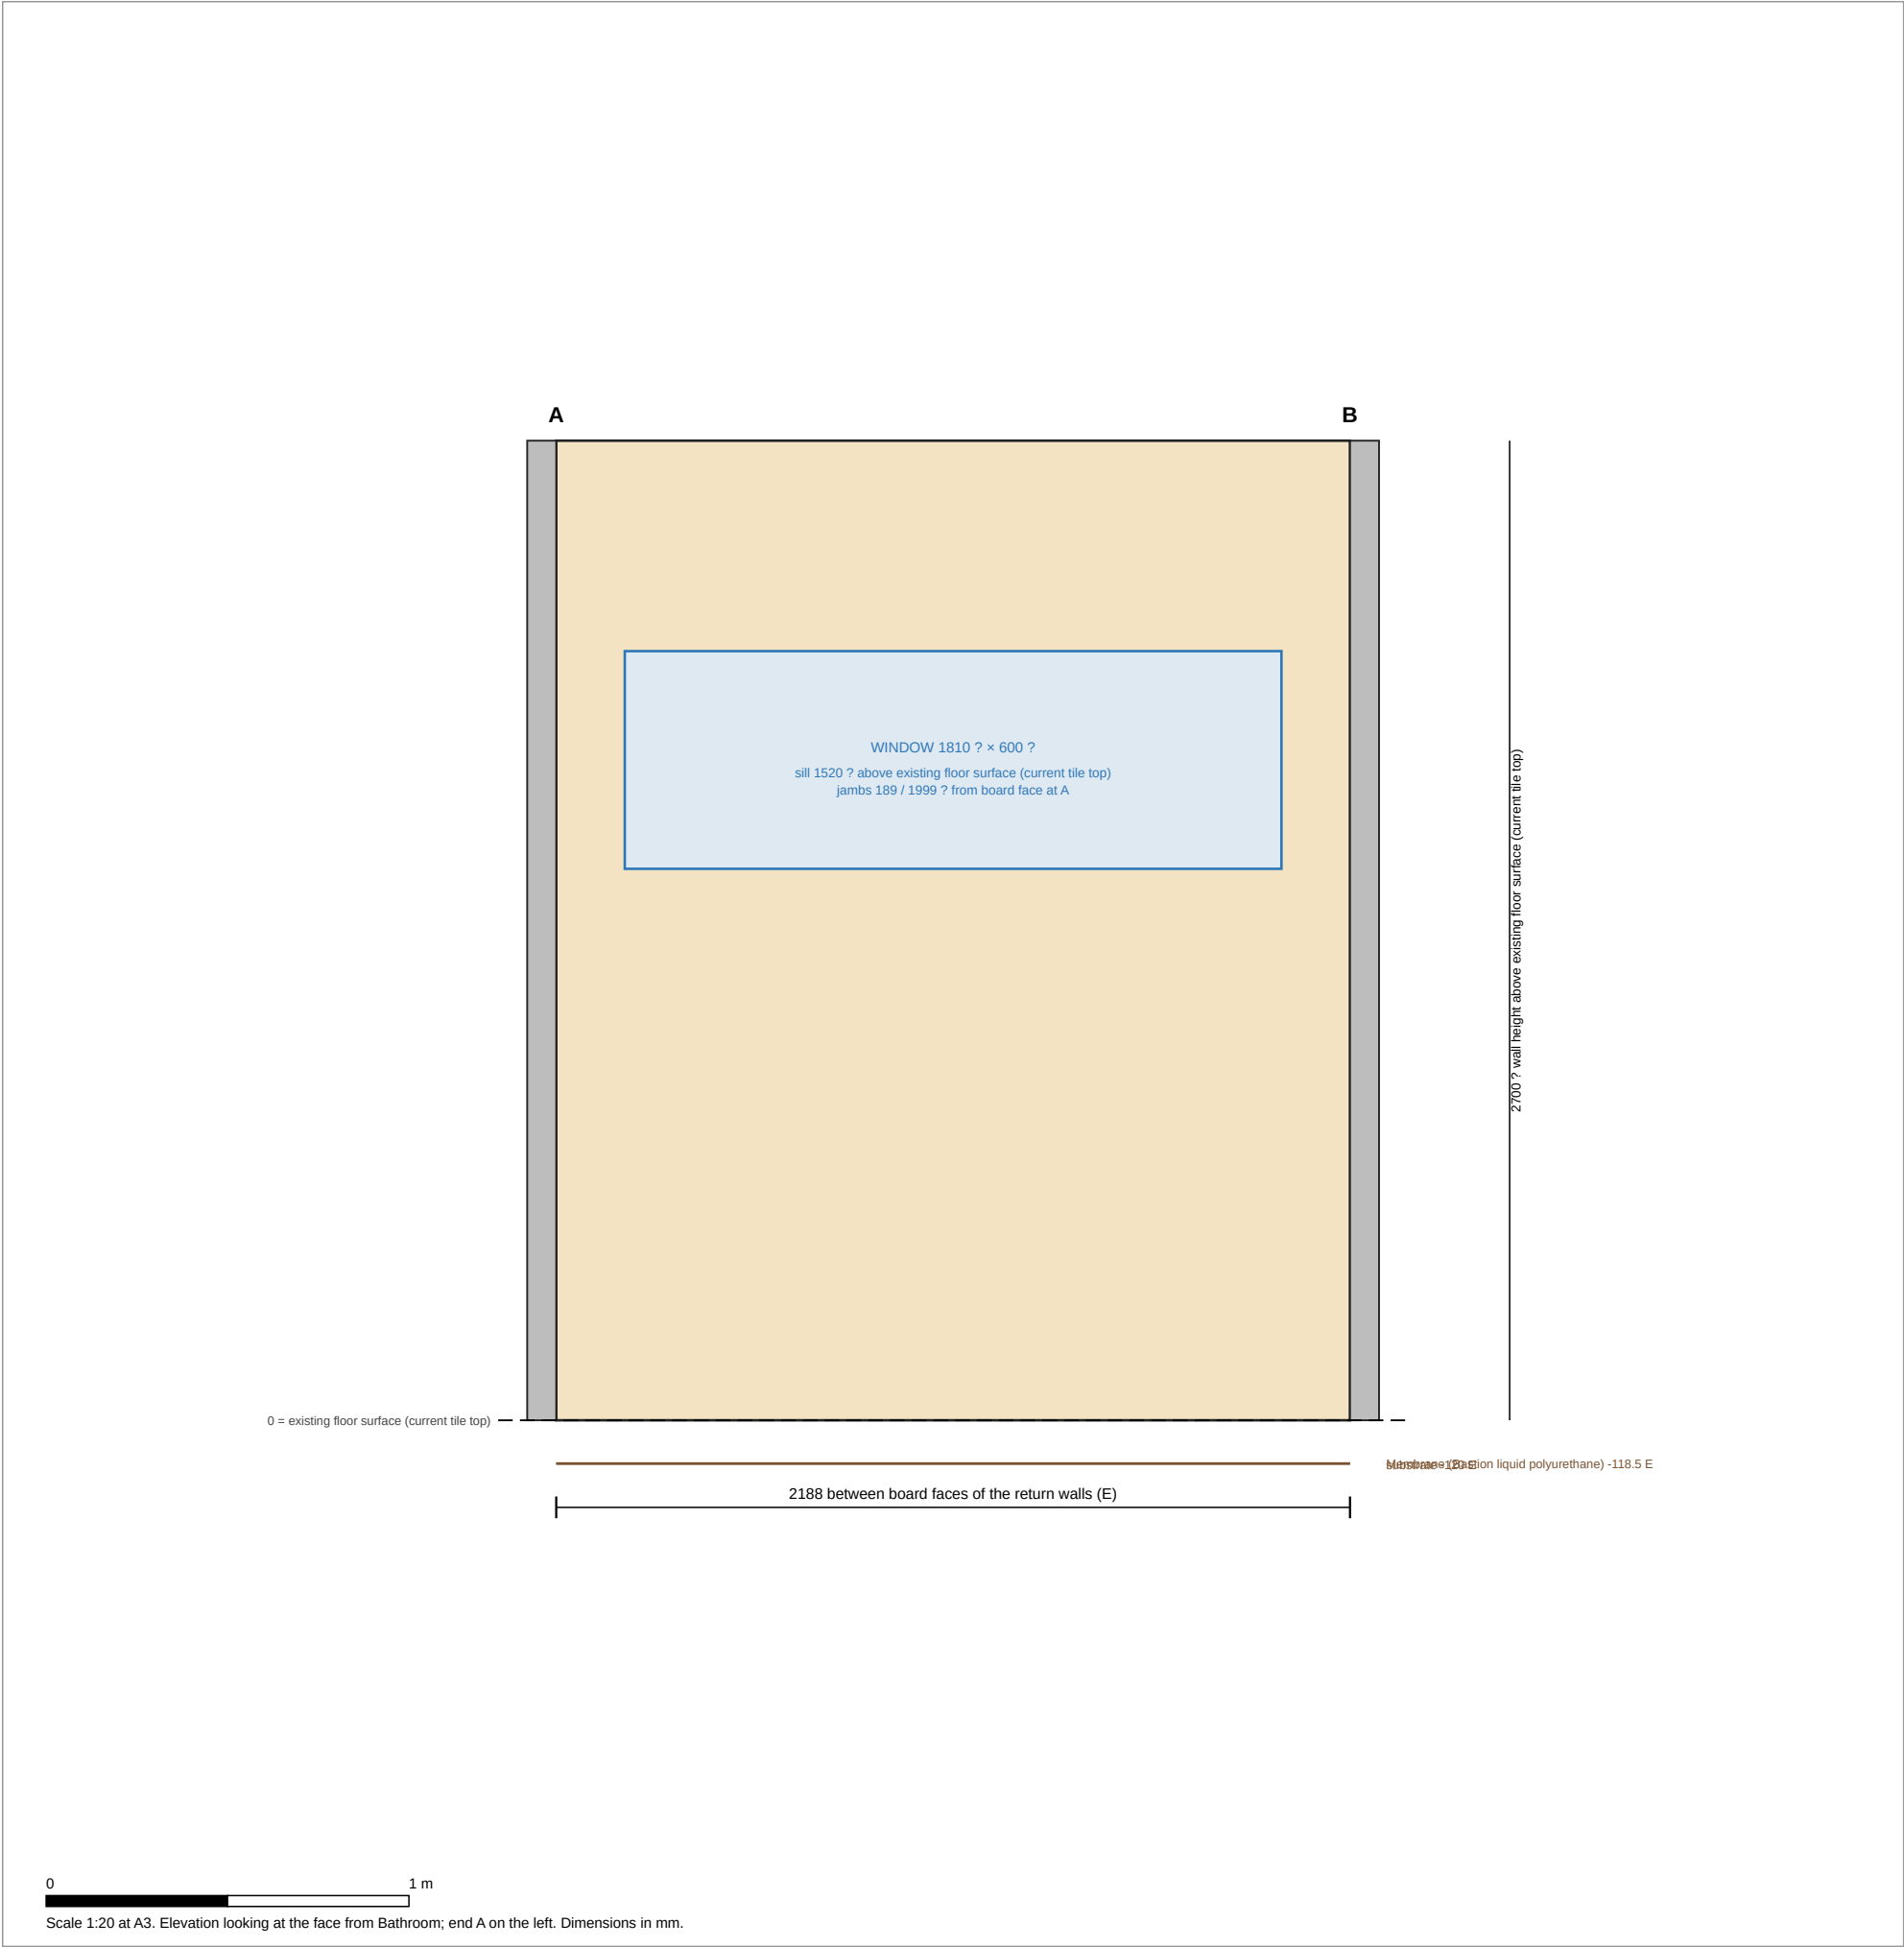

Stage: 5. Heating cable on the membrane

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage elevation: 5. Heating cable on the membrane · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

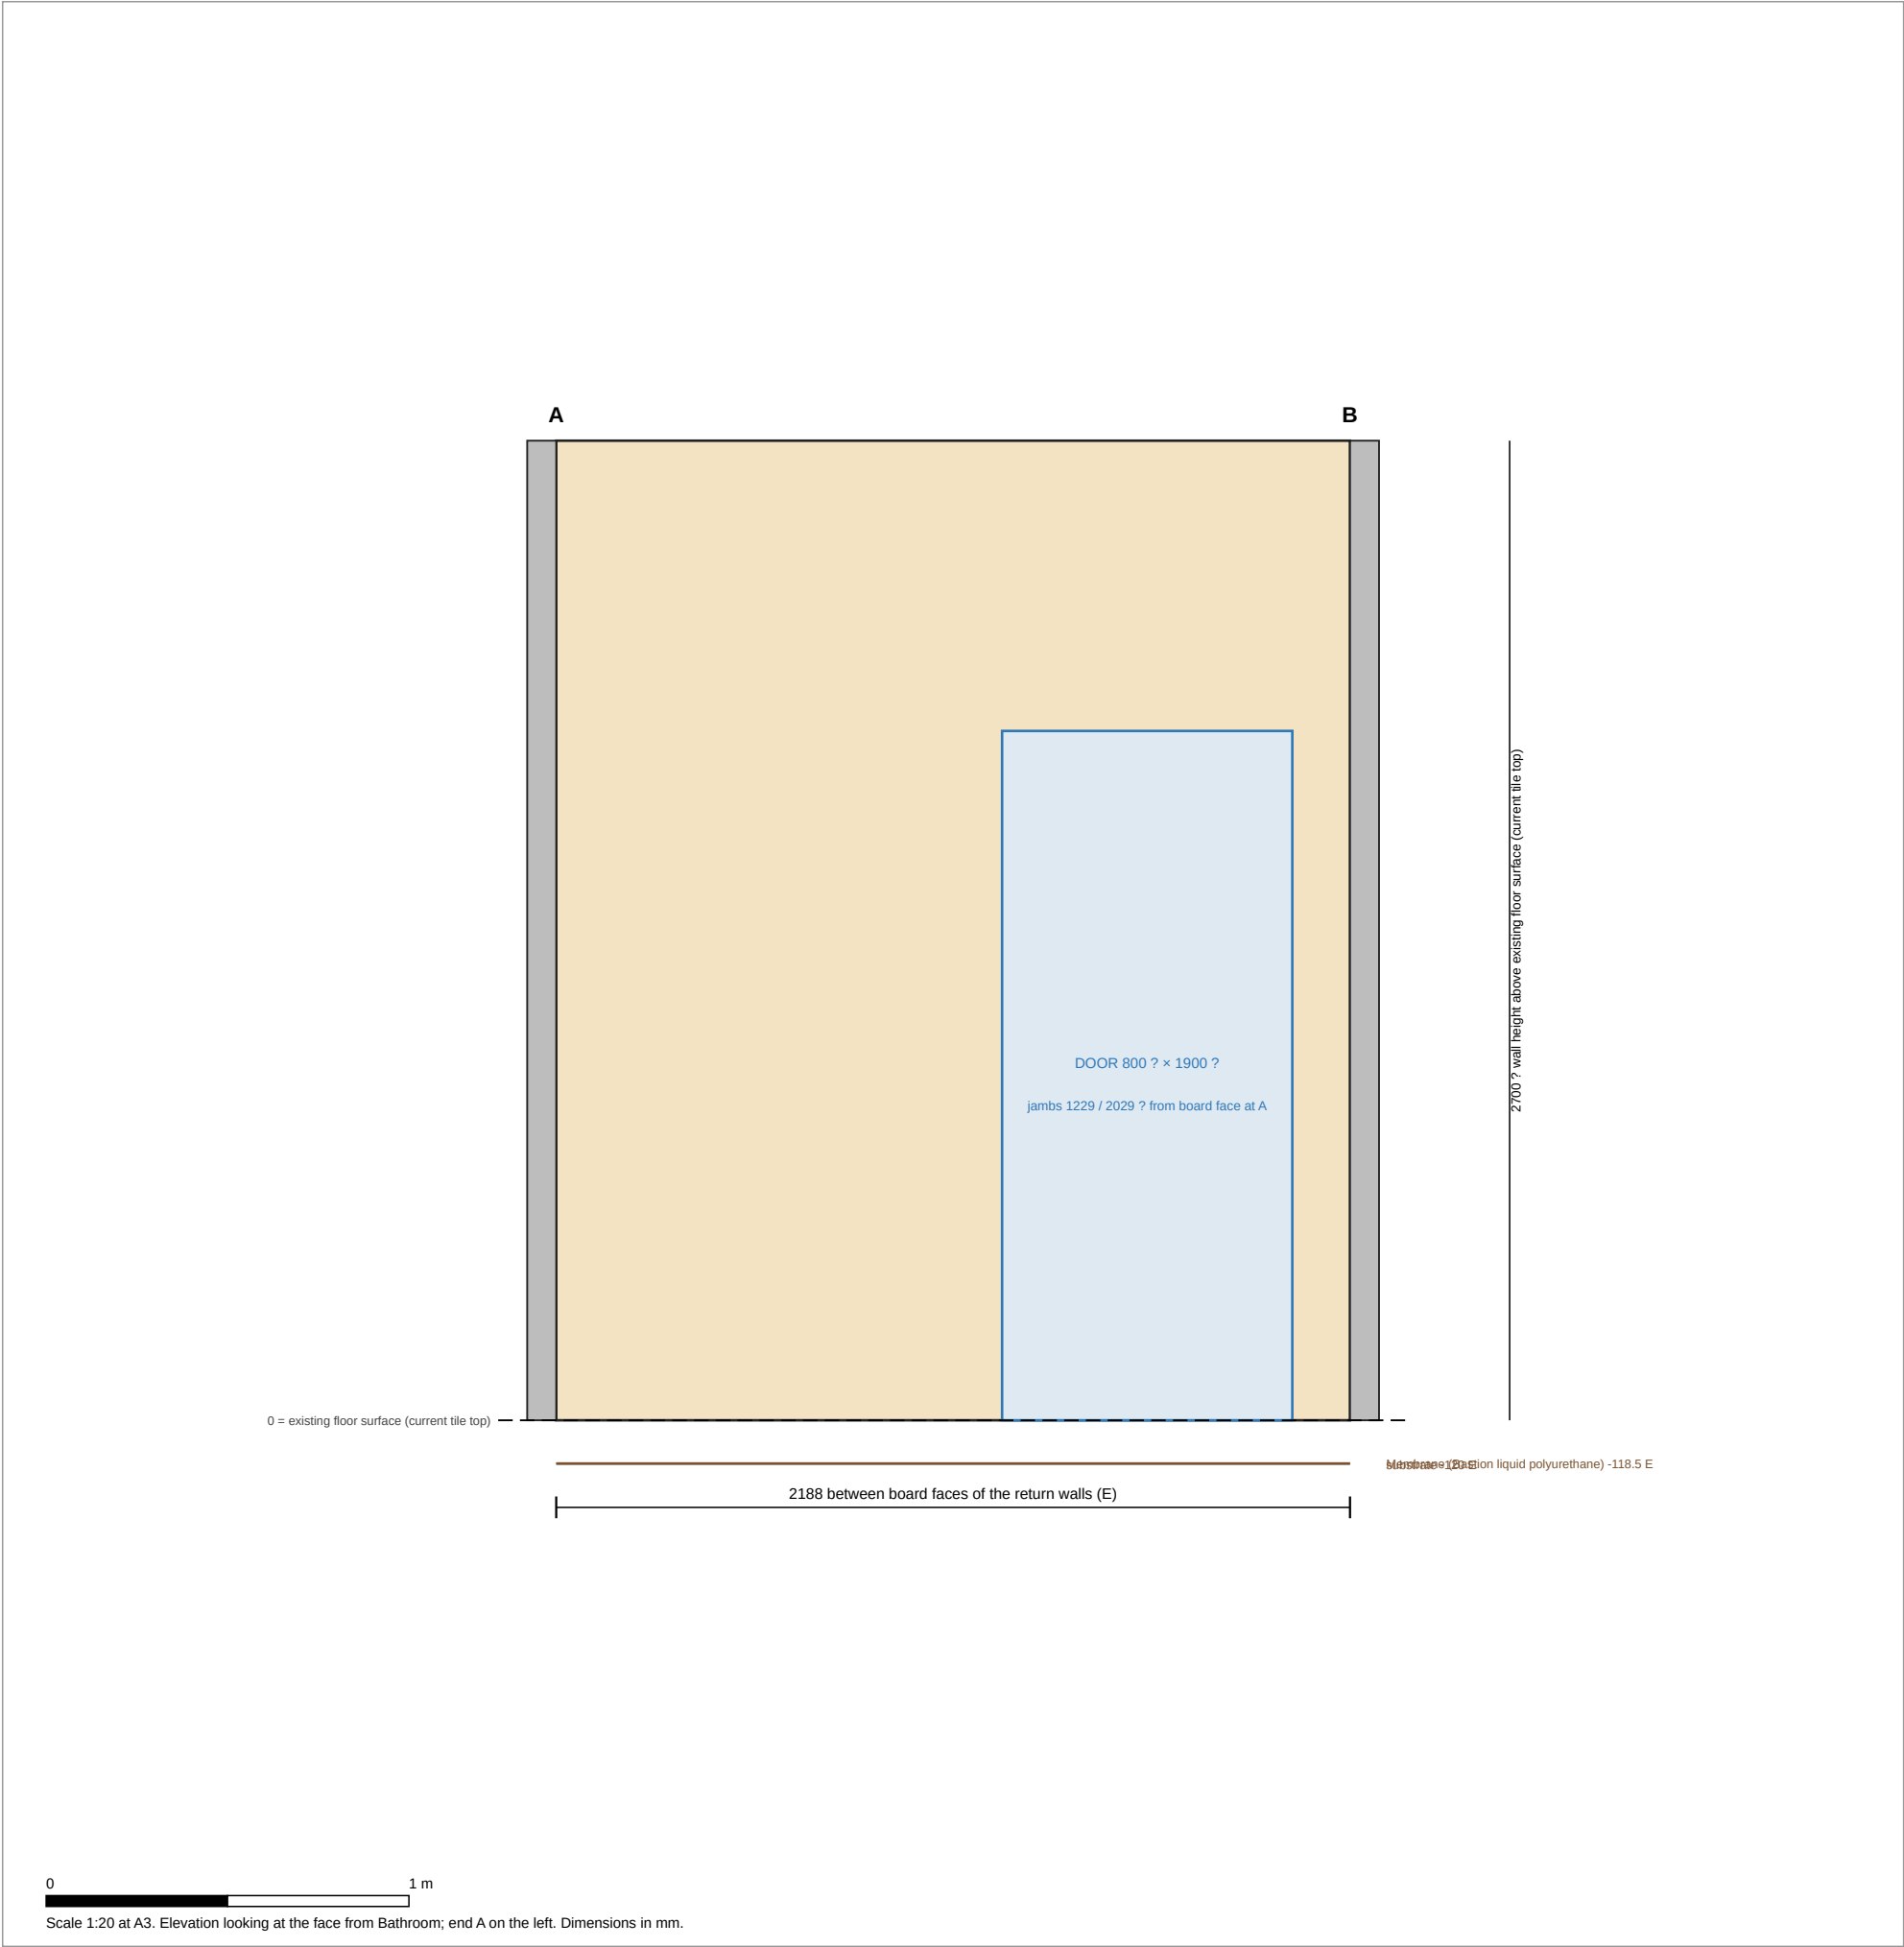

Stage: 5. Heating cable on the membrane

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 5. Heating cable on the membrane · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 5. Heating cable on the membrane


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

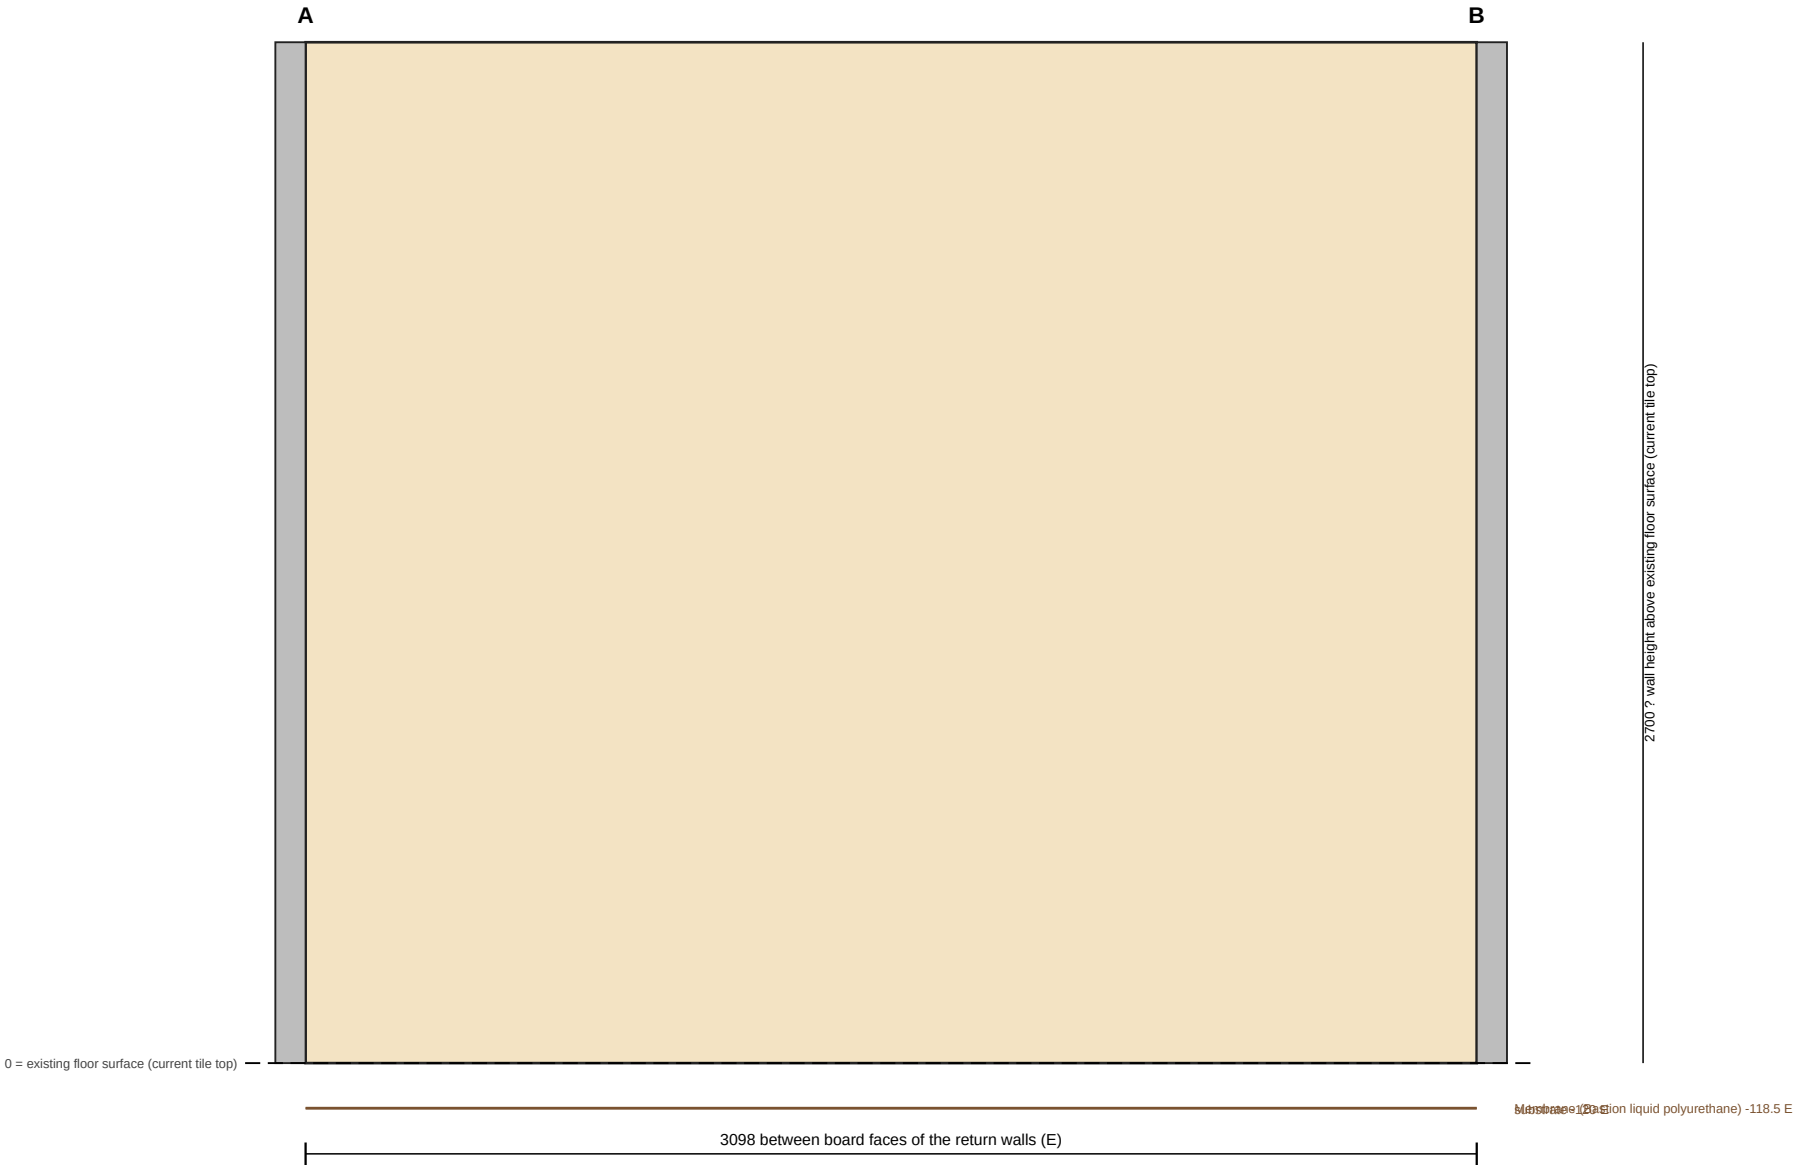


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 5. Heating cable on the membrane · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

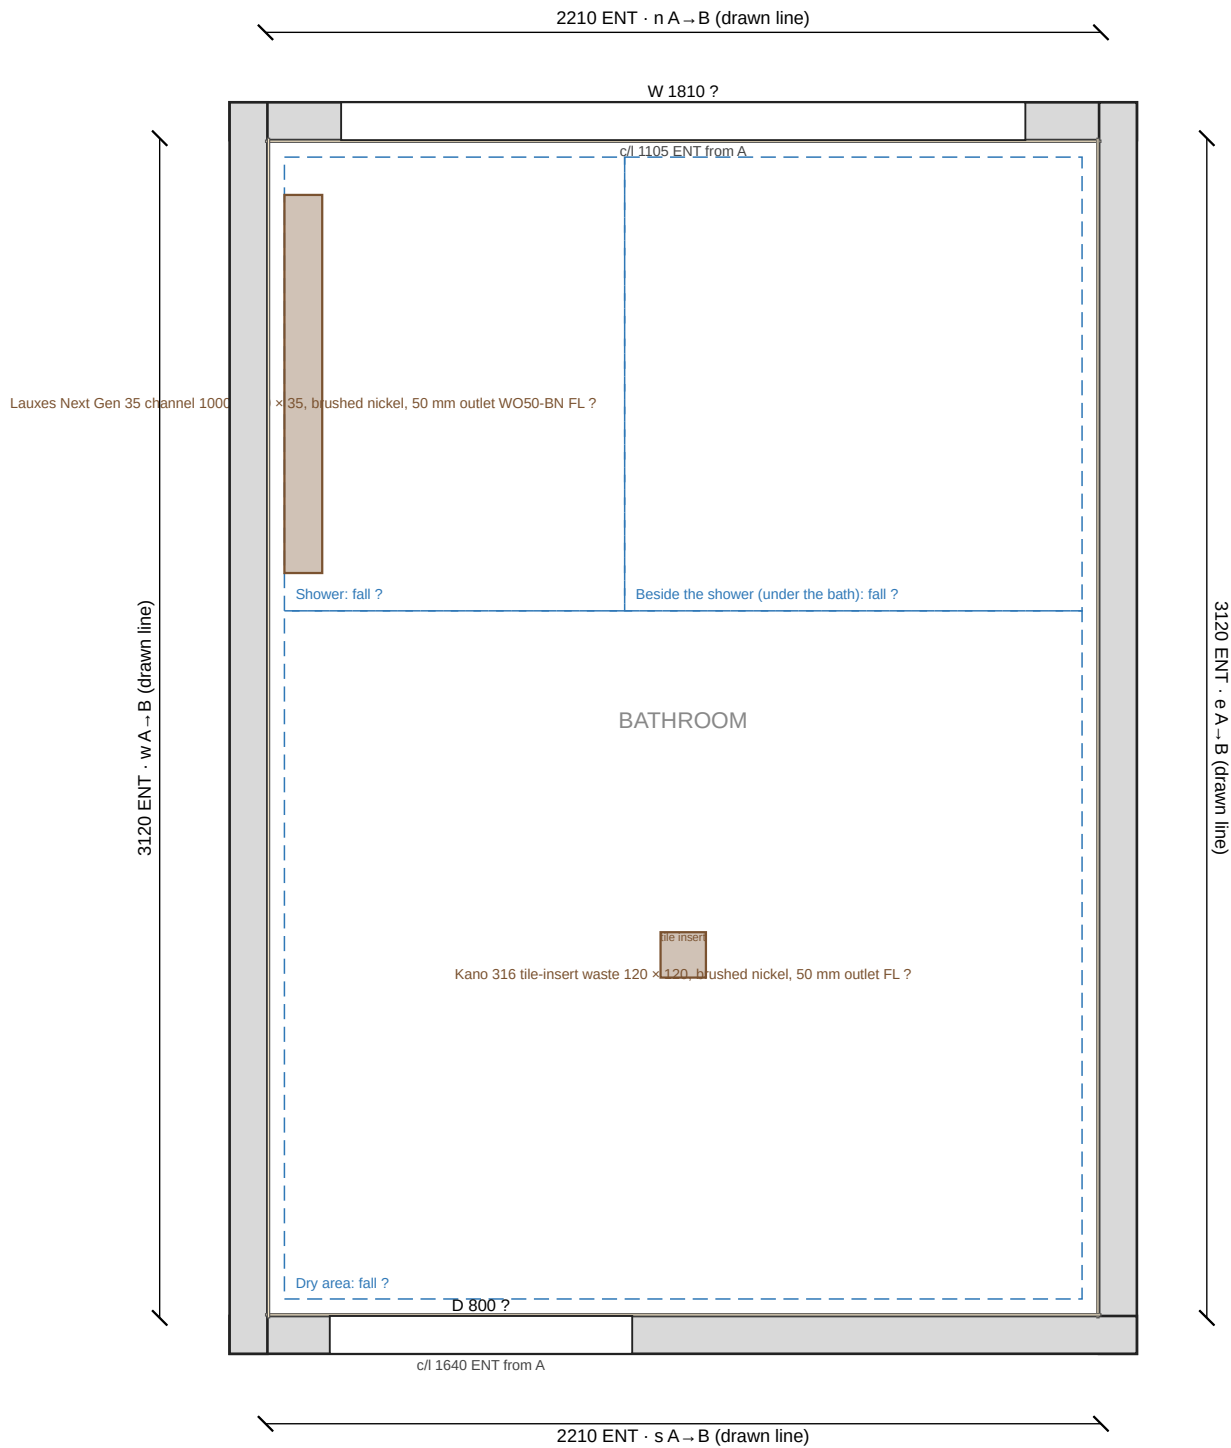

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

Stage: 6. Screed and falls

Shows 19 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (10)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
 - Bathroom: Shower: fall (mm per m) unknown; printed as "?" (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level).
- ... 2 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 6. Screed and falls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

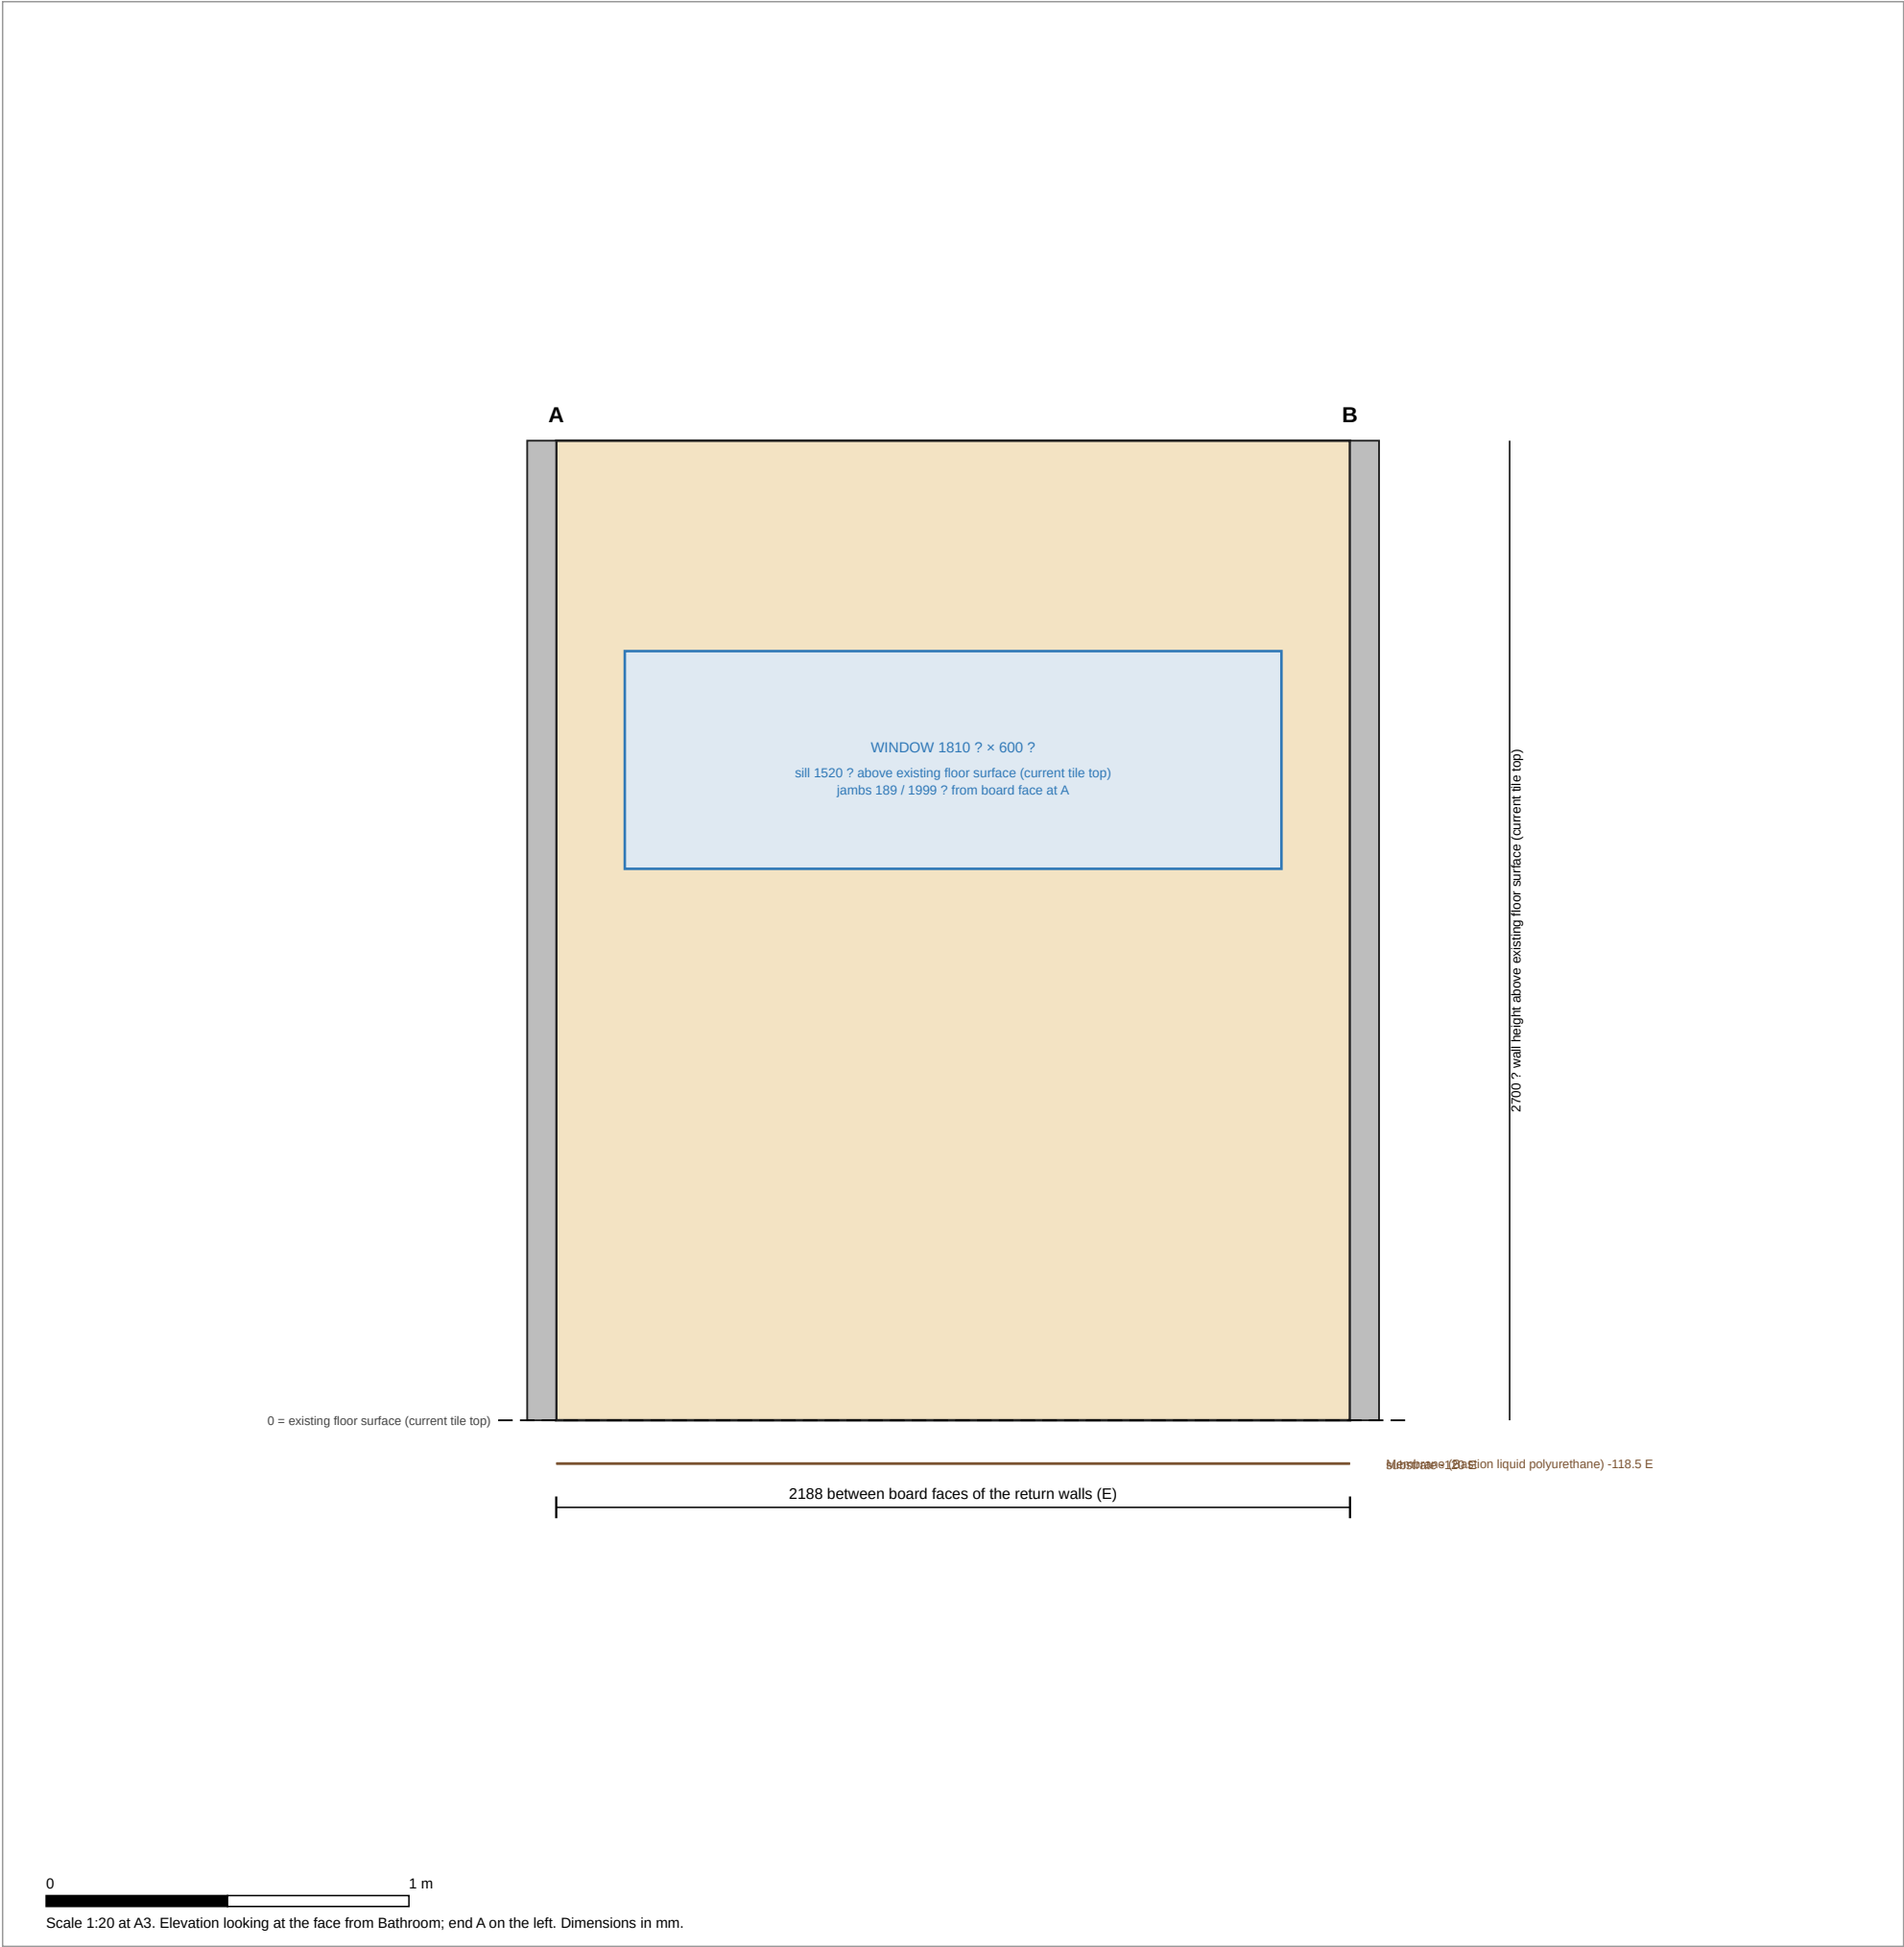

Stage: 6. Screed and falls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 6. Screed and falls · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 6. Screed and falls


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

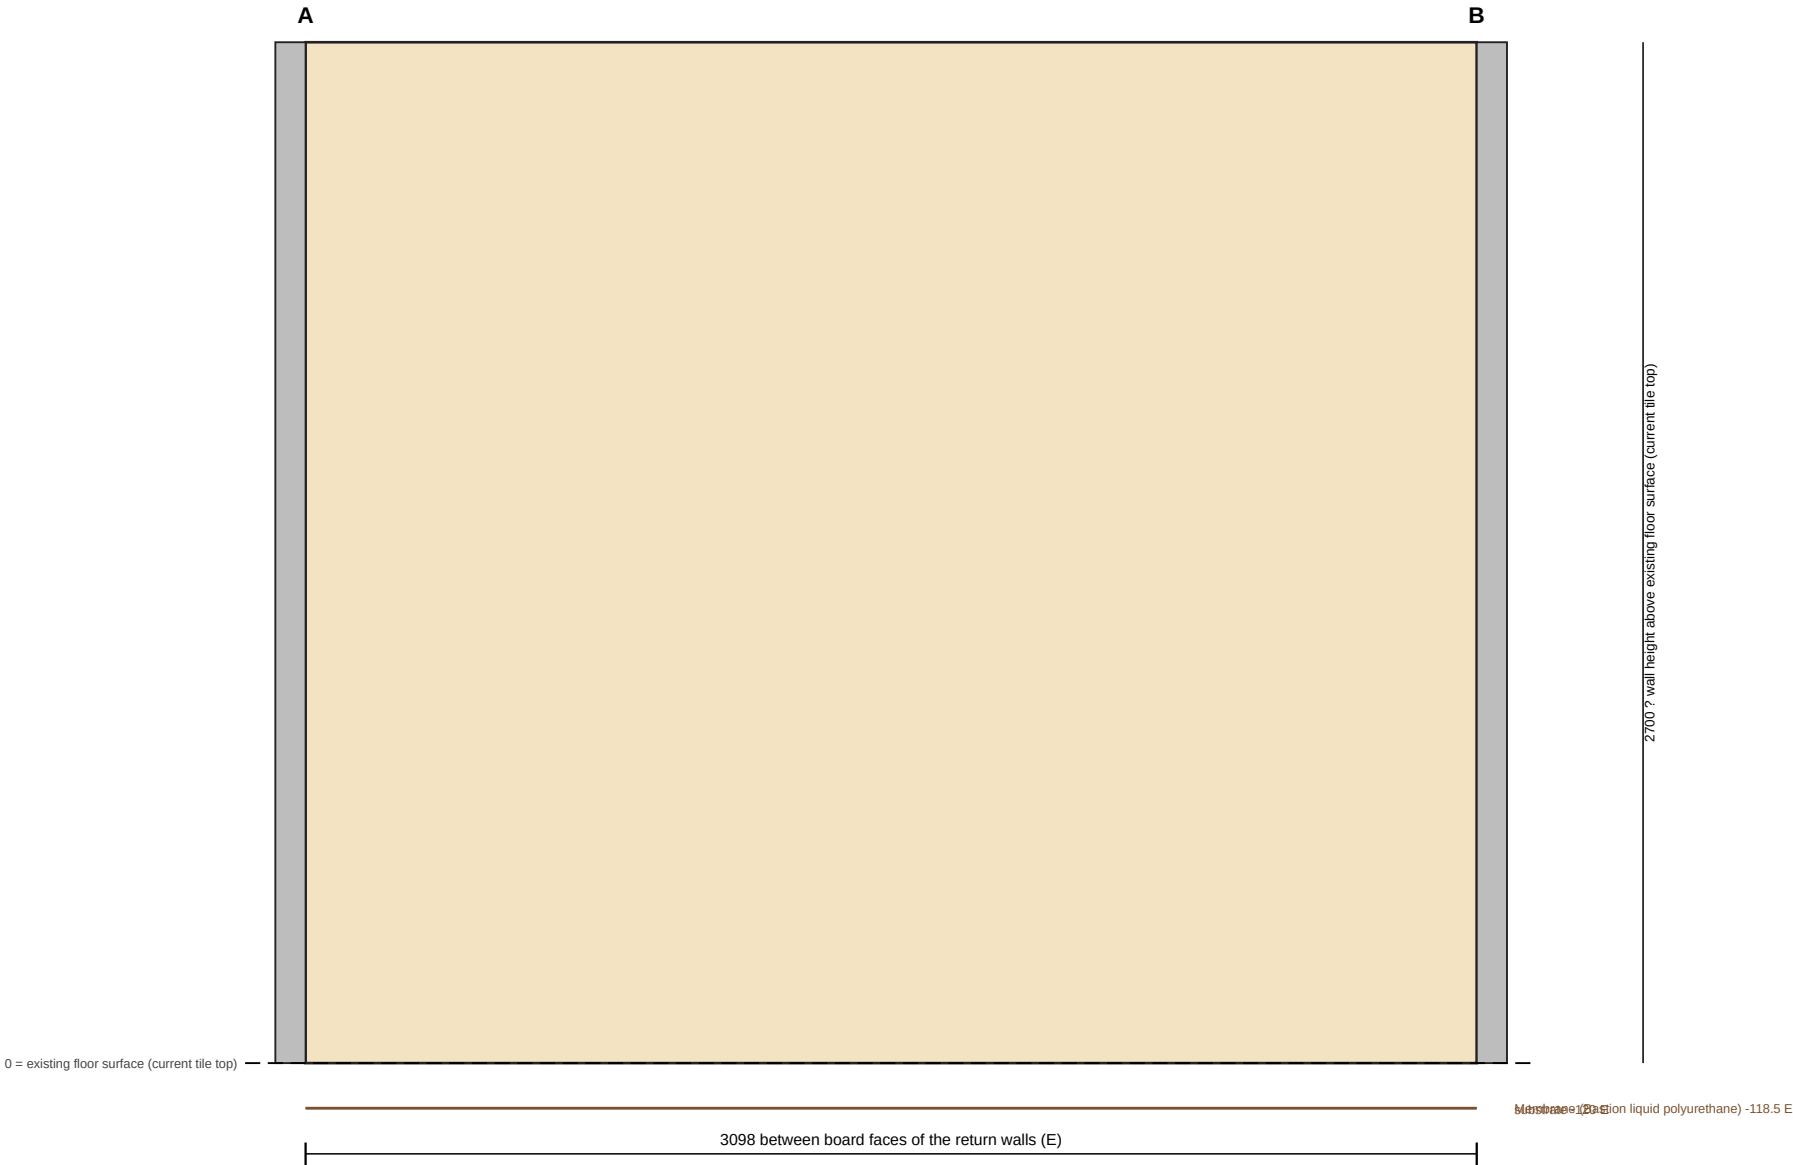


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

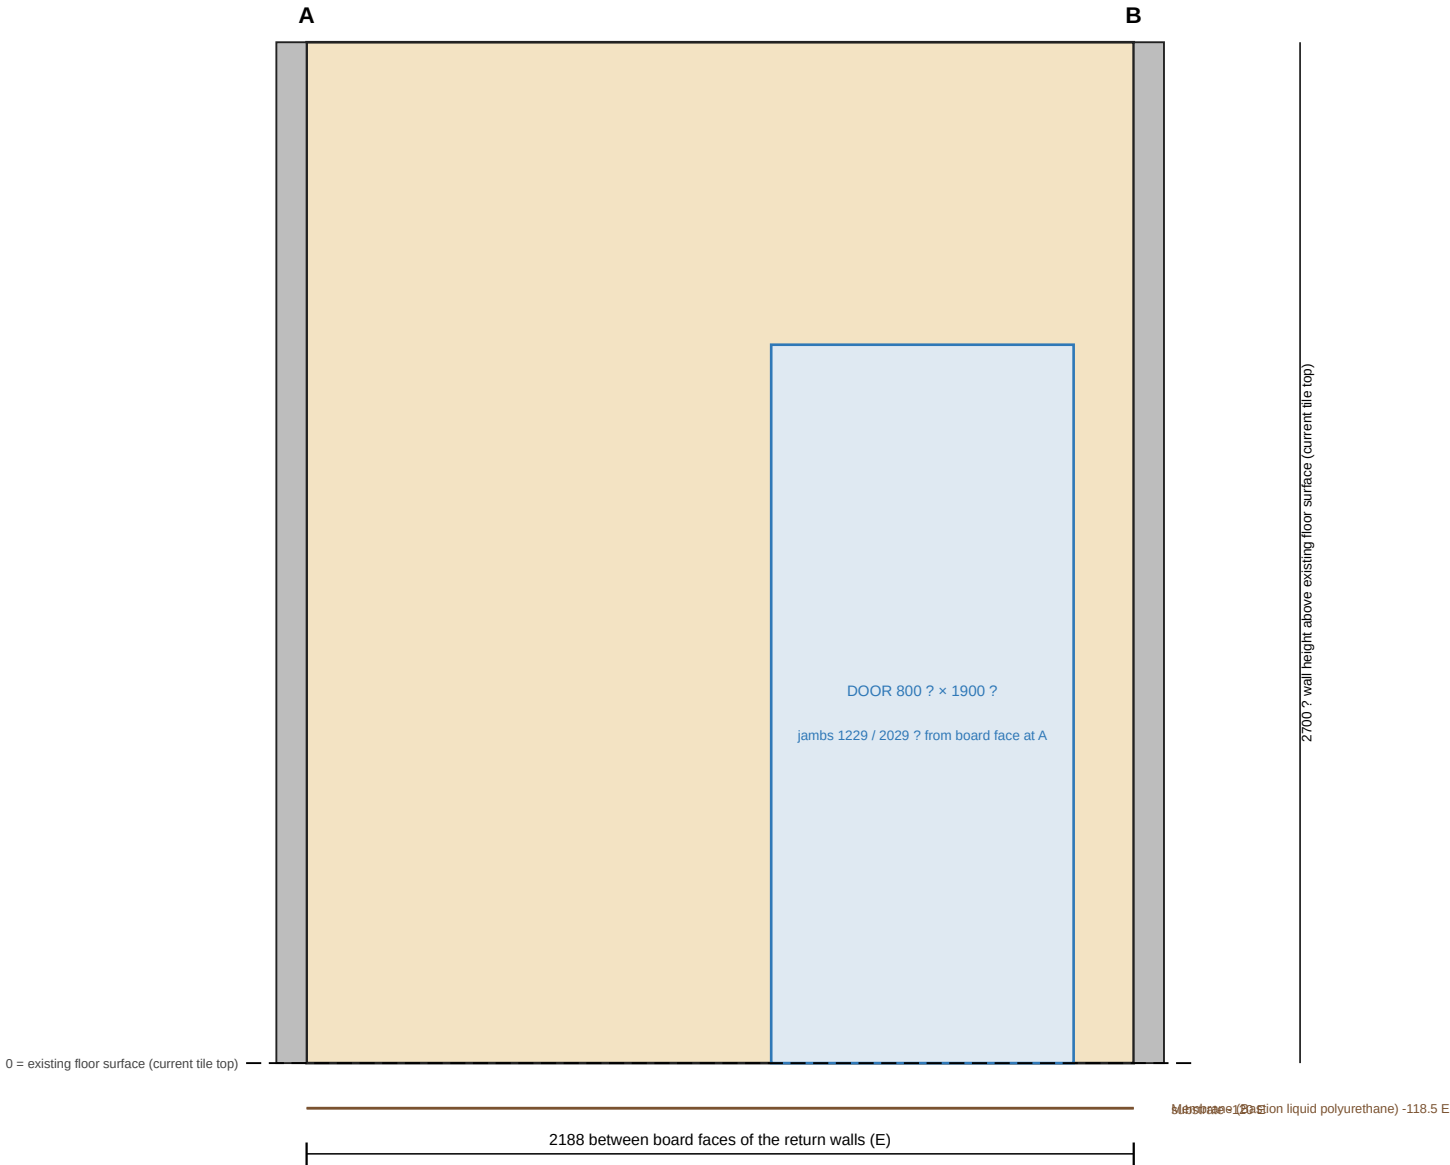

Stage: 6. Screed and falls

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 6. Screed and falls


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

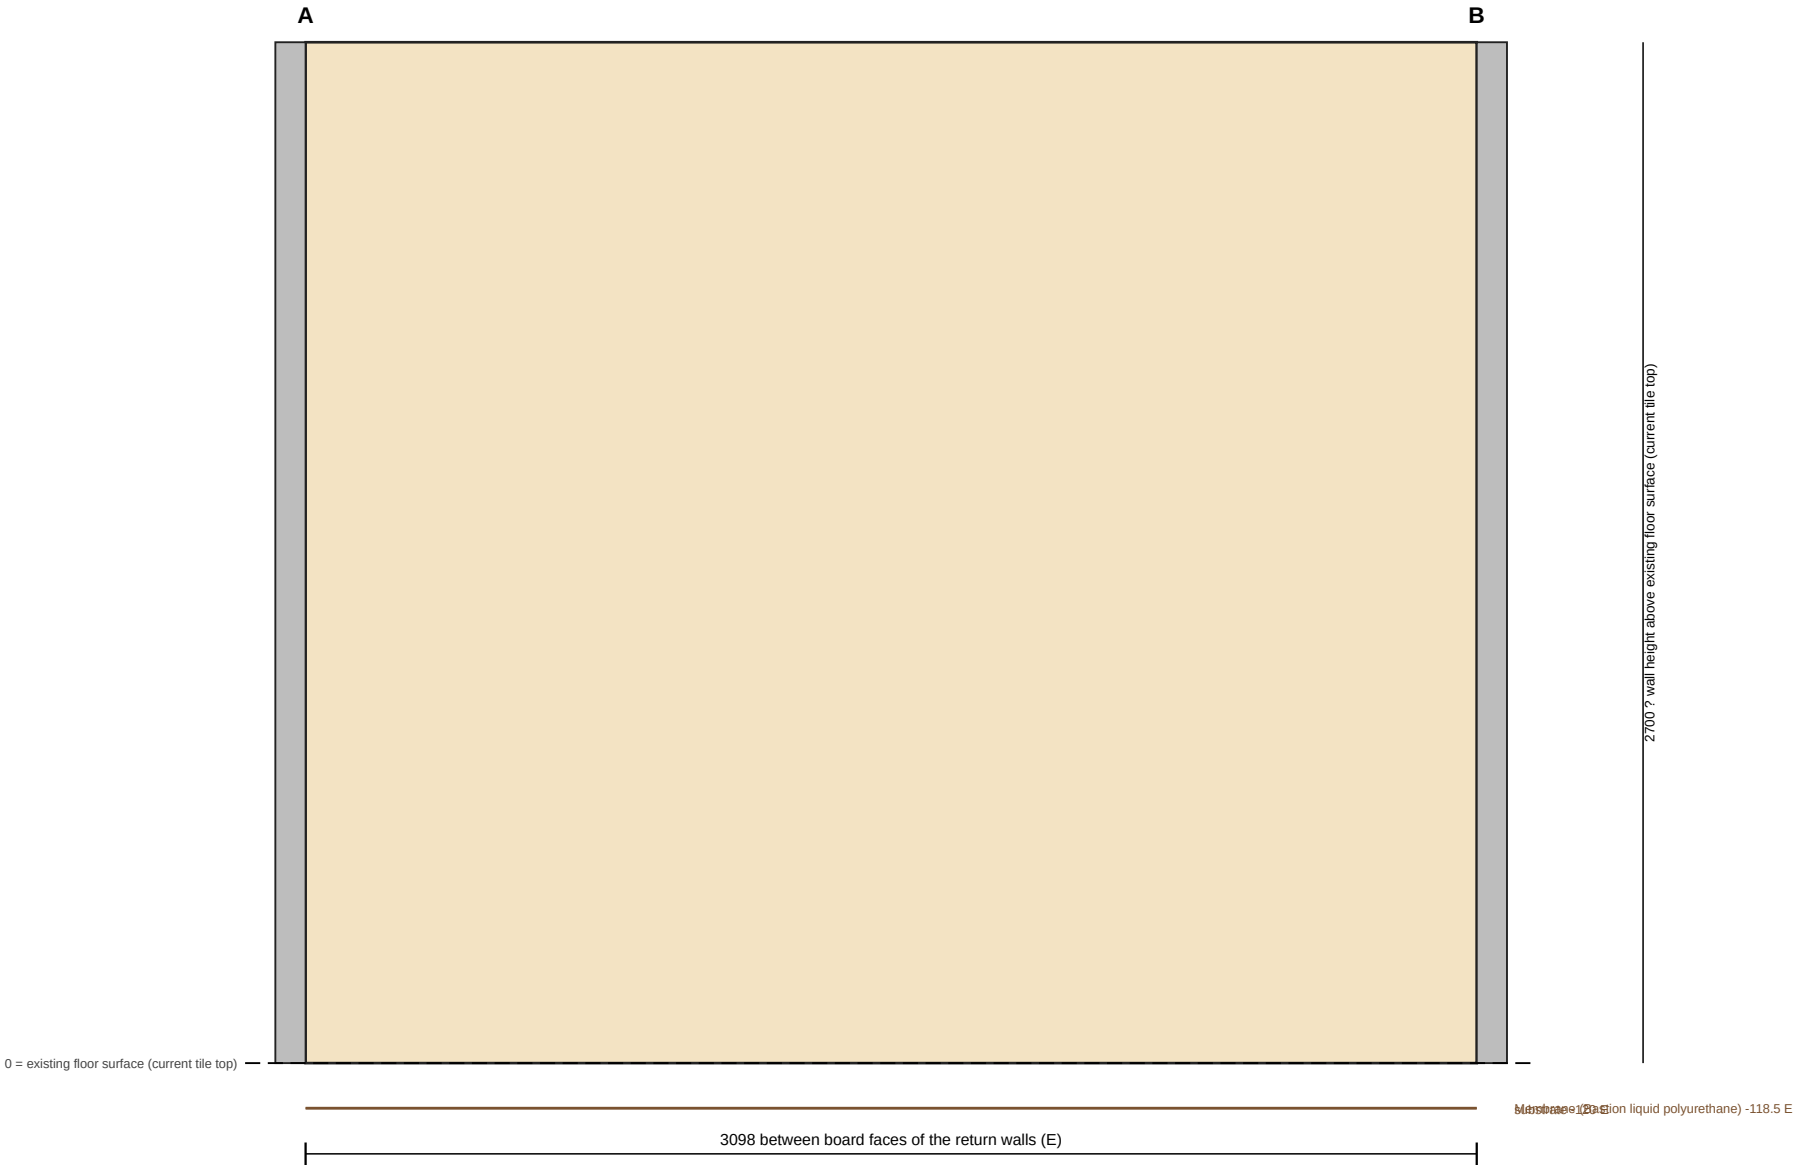


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

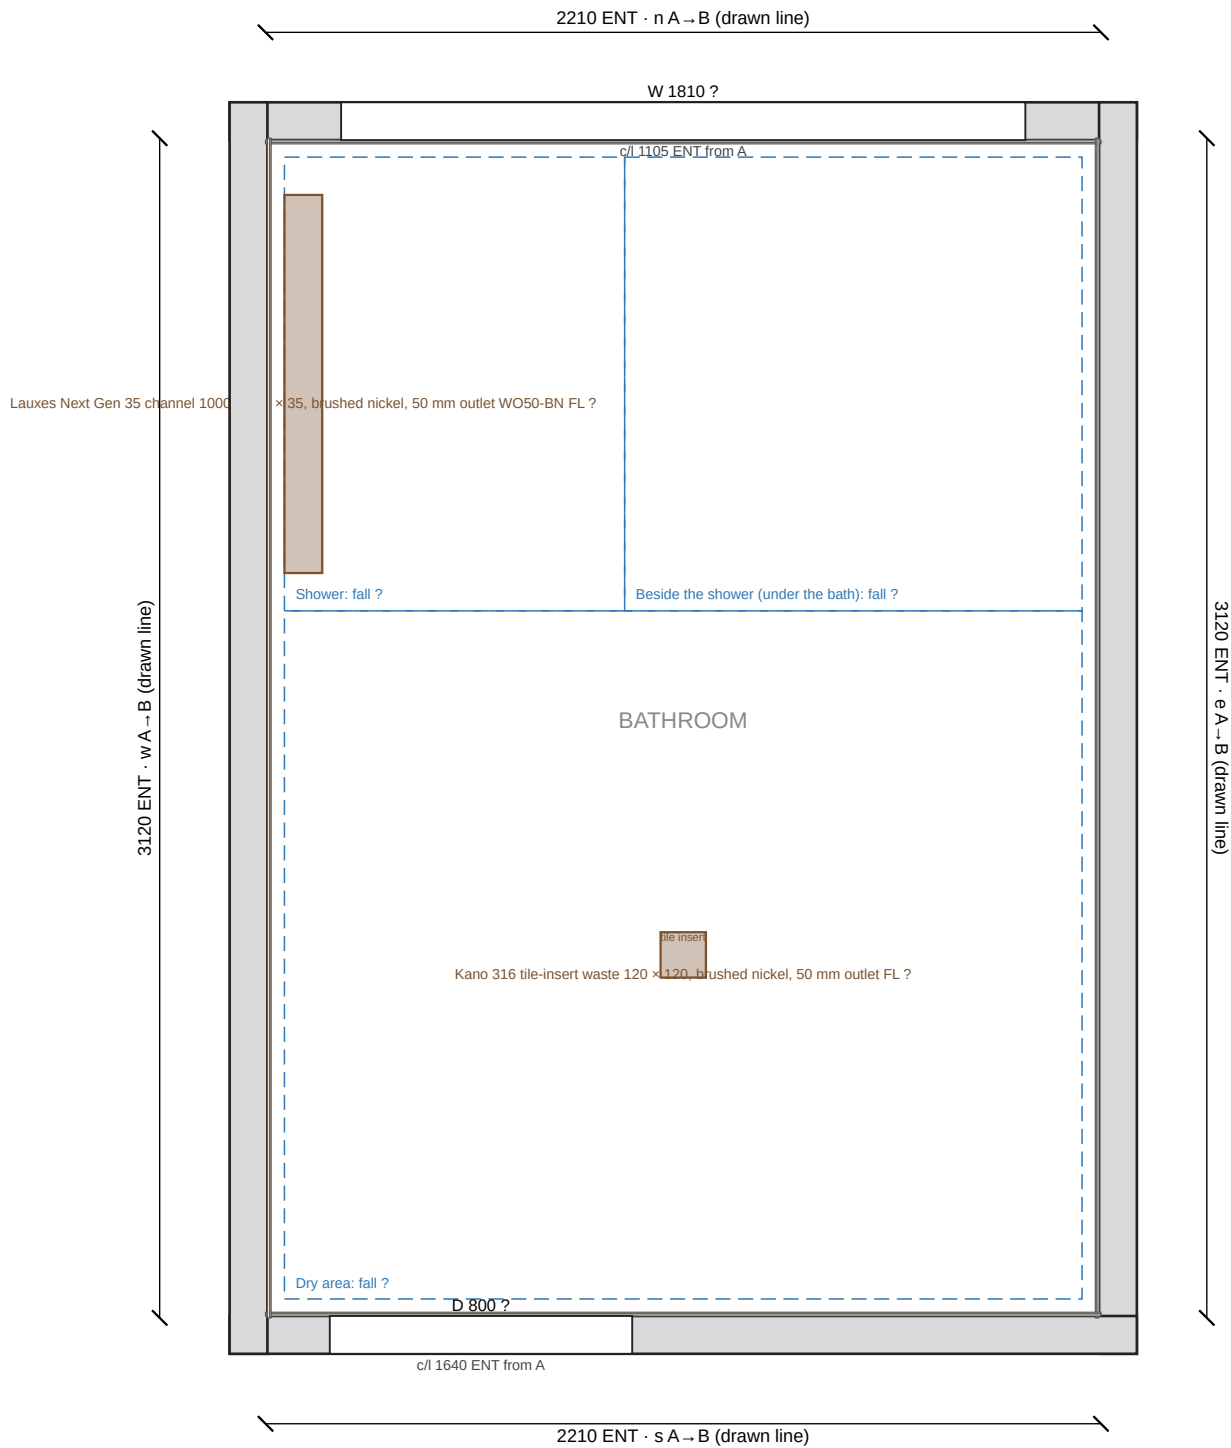

Stage: 7. Tile adhesive, floor and walls

Shows 23 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall n right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?
Bathroom floor: Tiler's adhesive: thickness ? · top level -10 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
 - Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- ... 3 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 7. Tile adhesive, floor and walls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

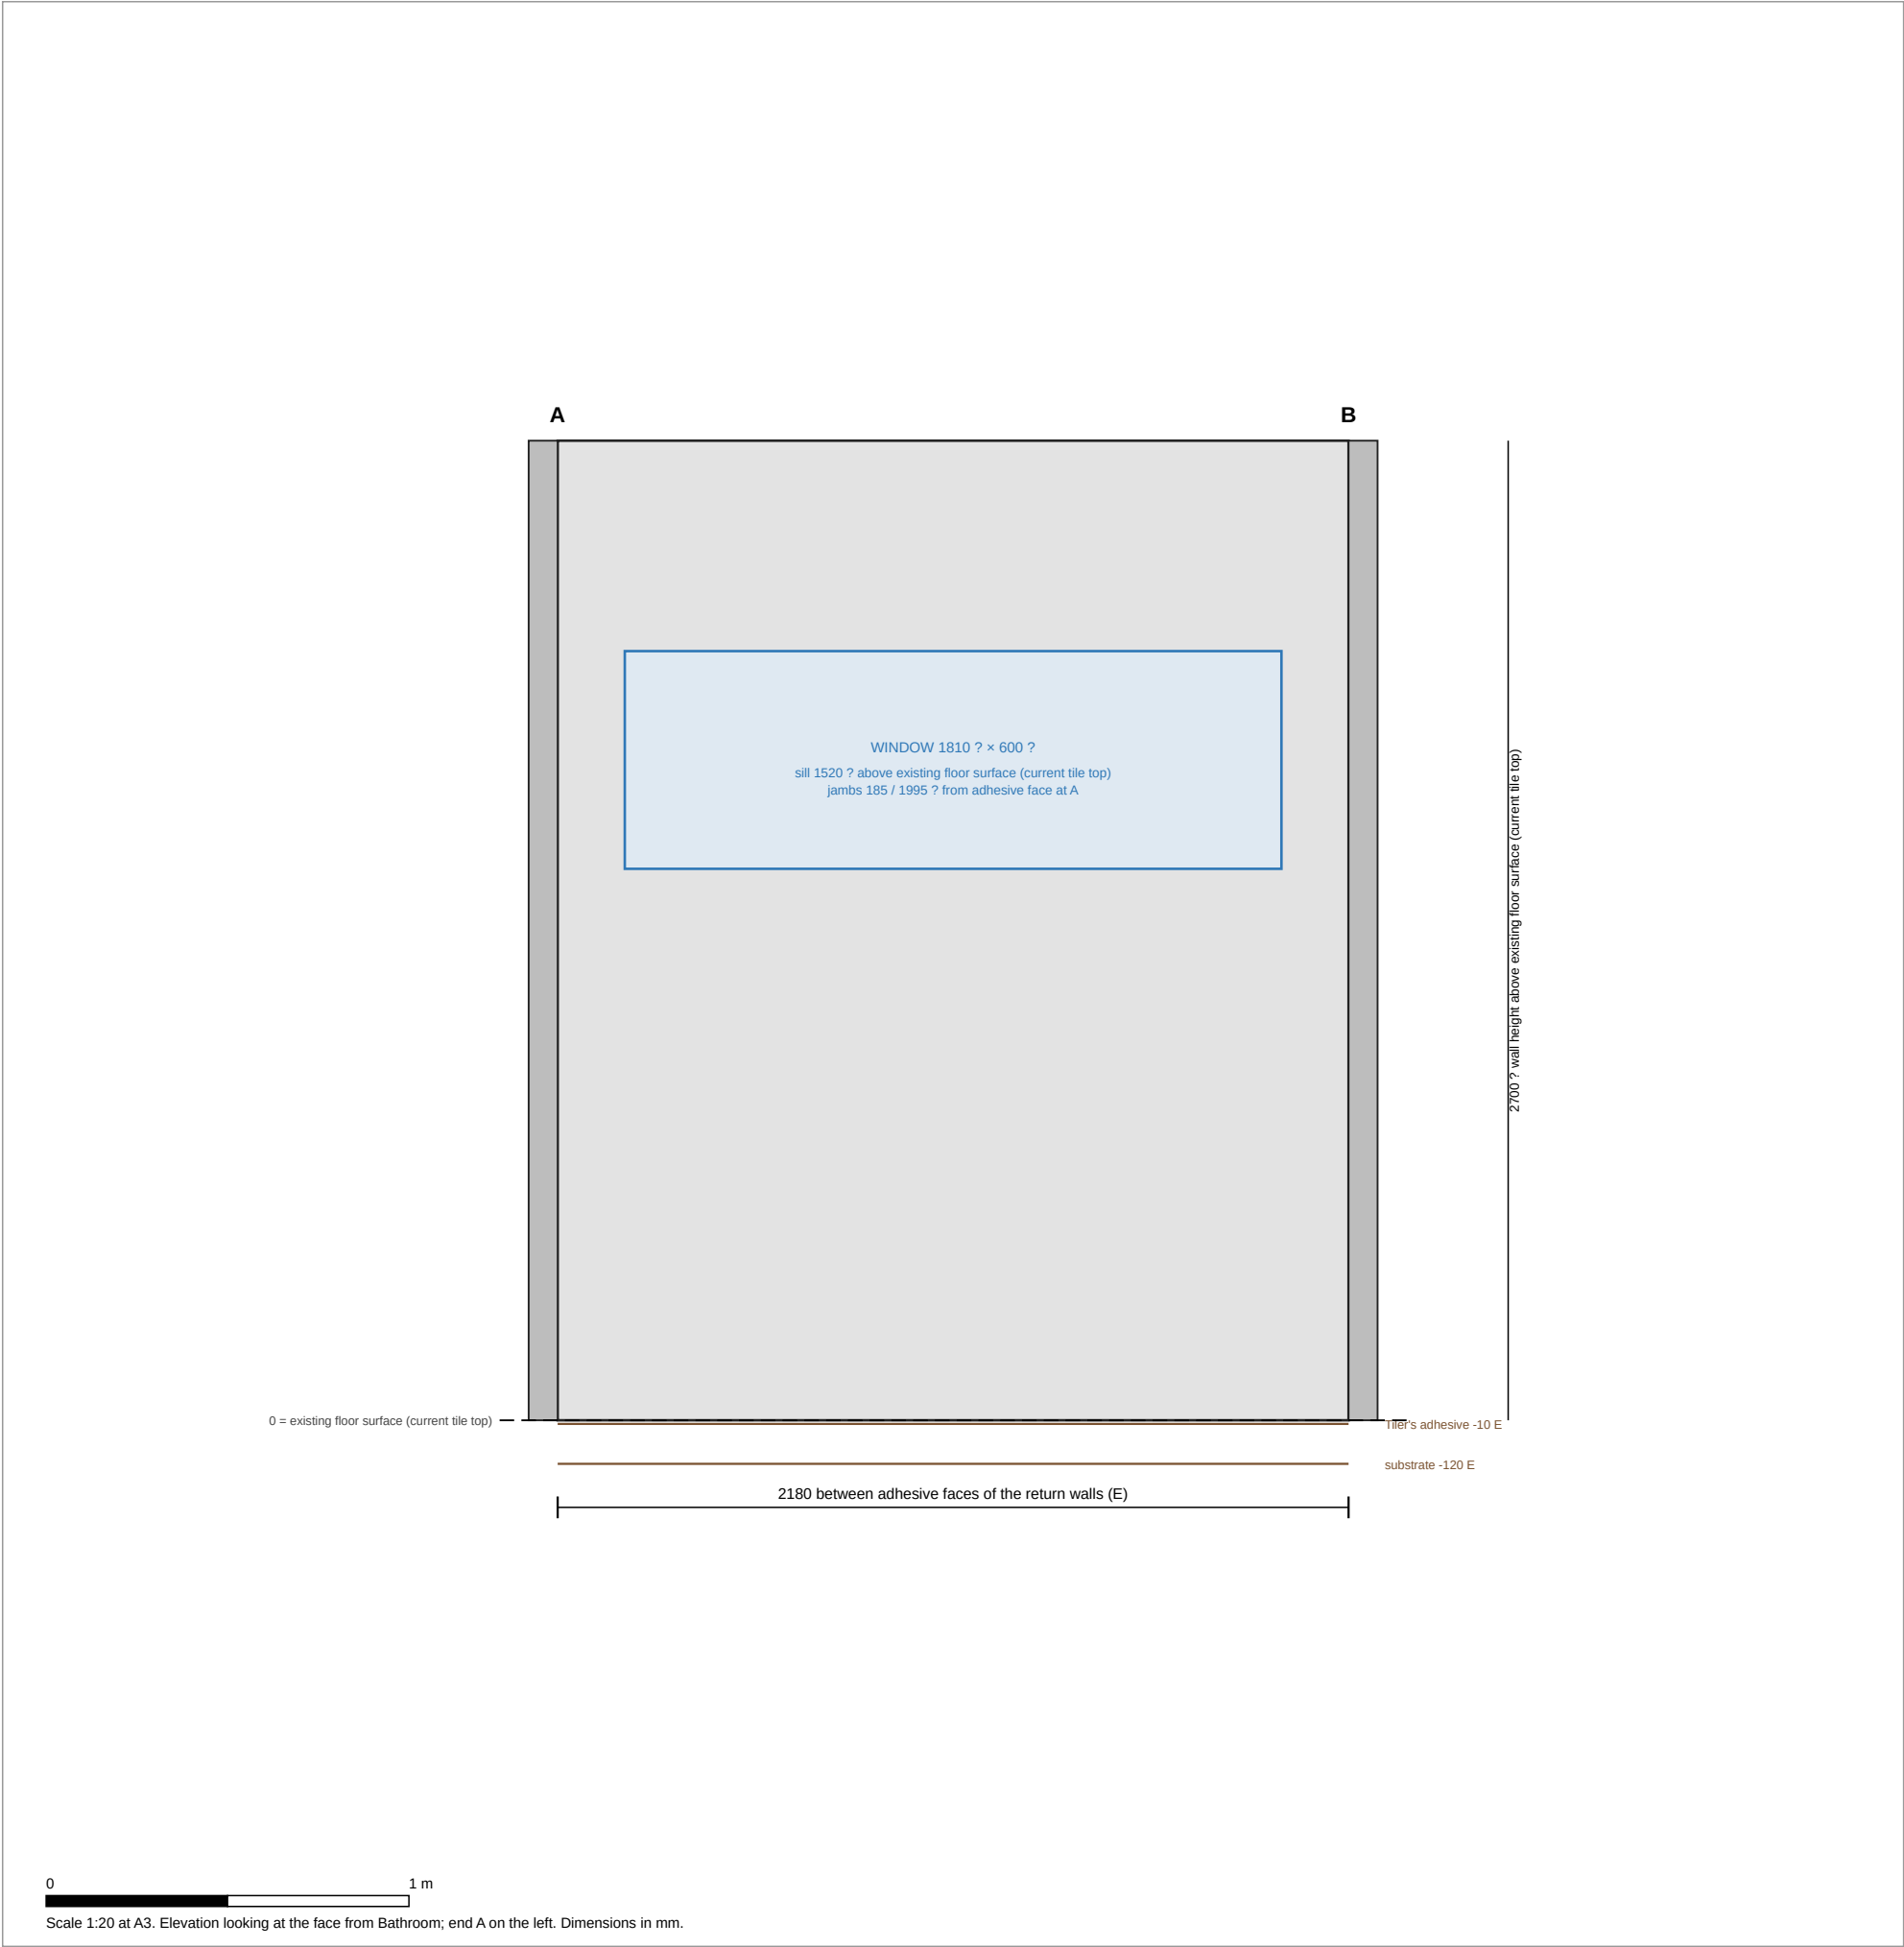

Stage: 7. Tile adhesive, floor and walls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_w (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_e (right side) at 2195 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 7. Tile adhesive, floor and walls

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_n (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_s (right side) at 3105 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)




0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

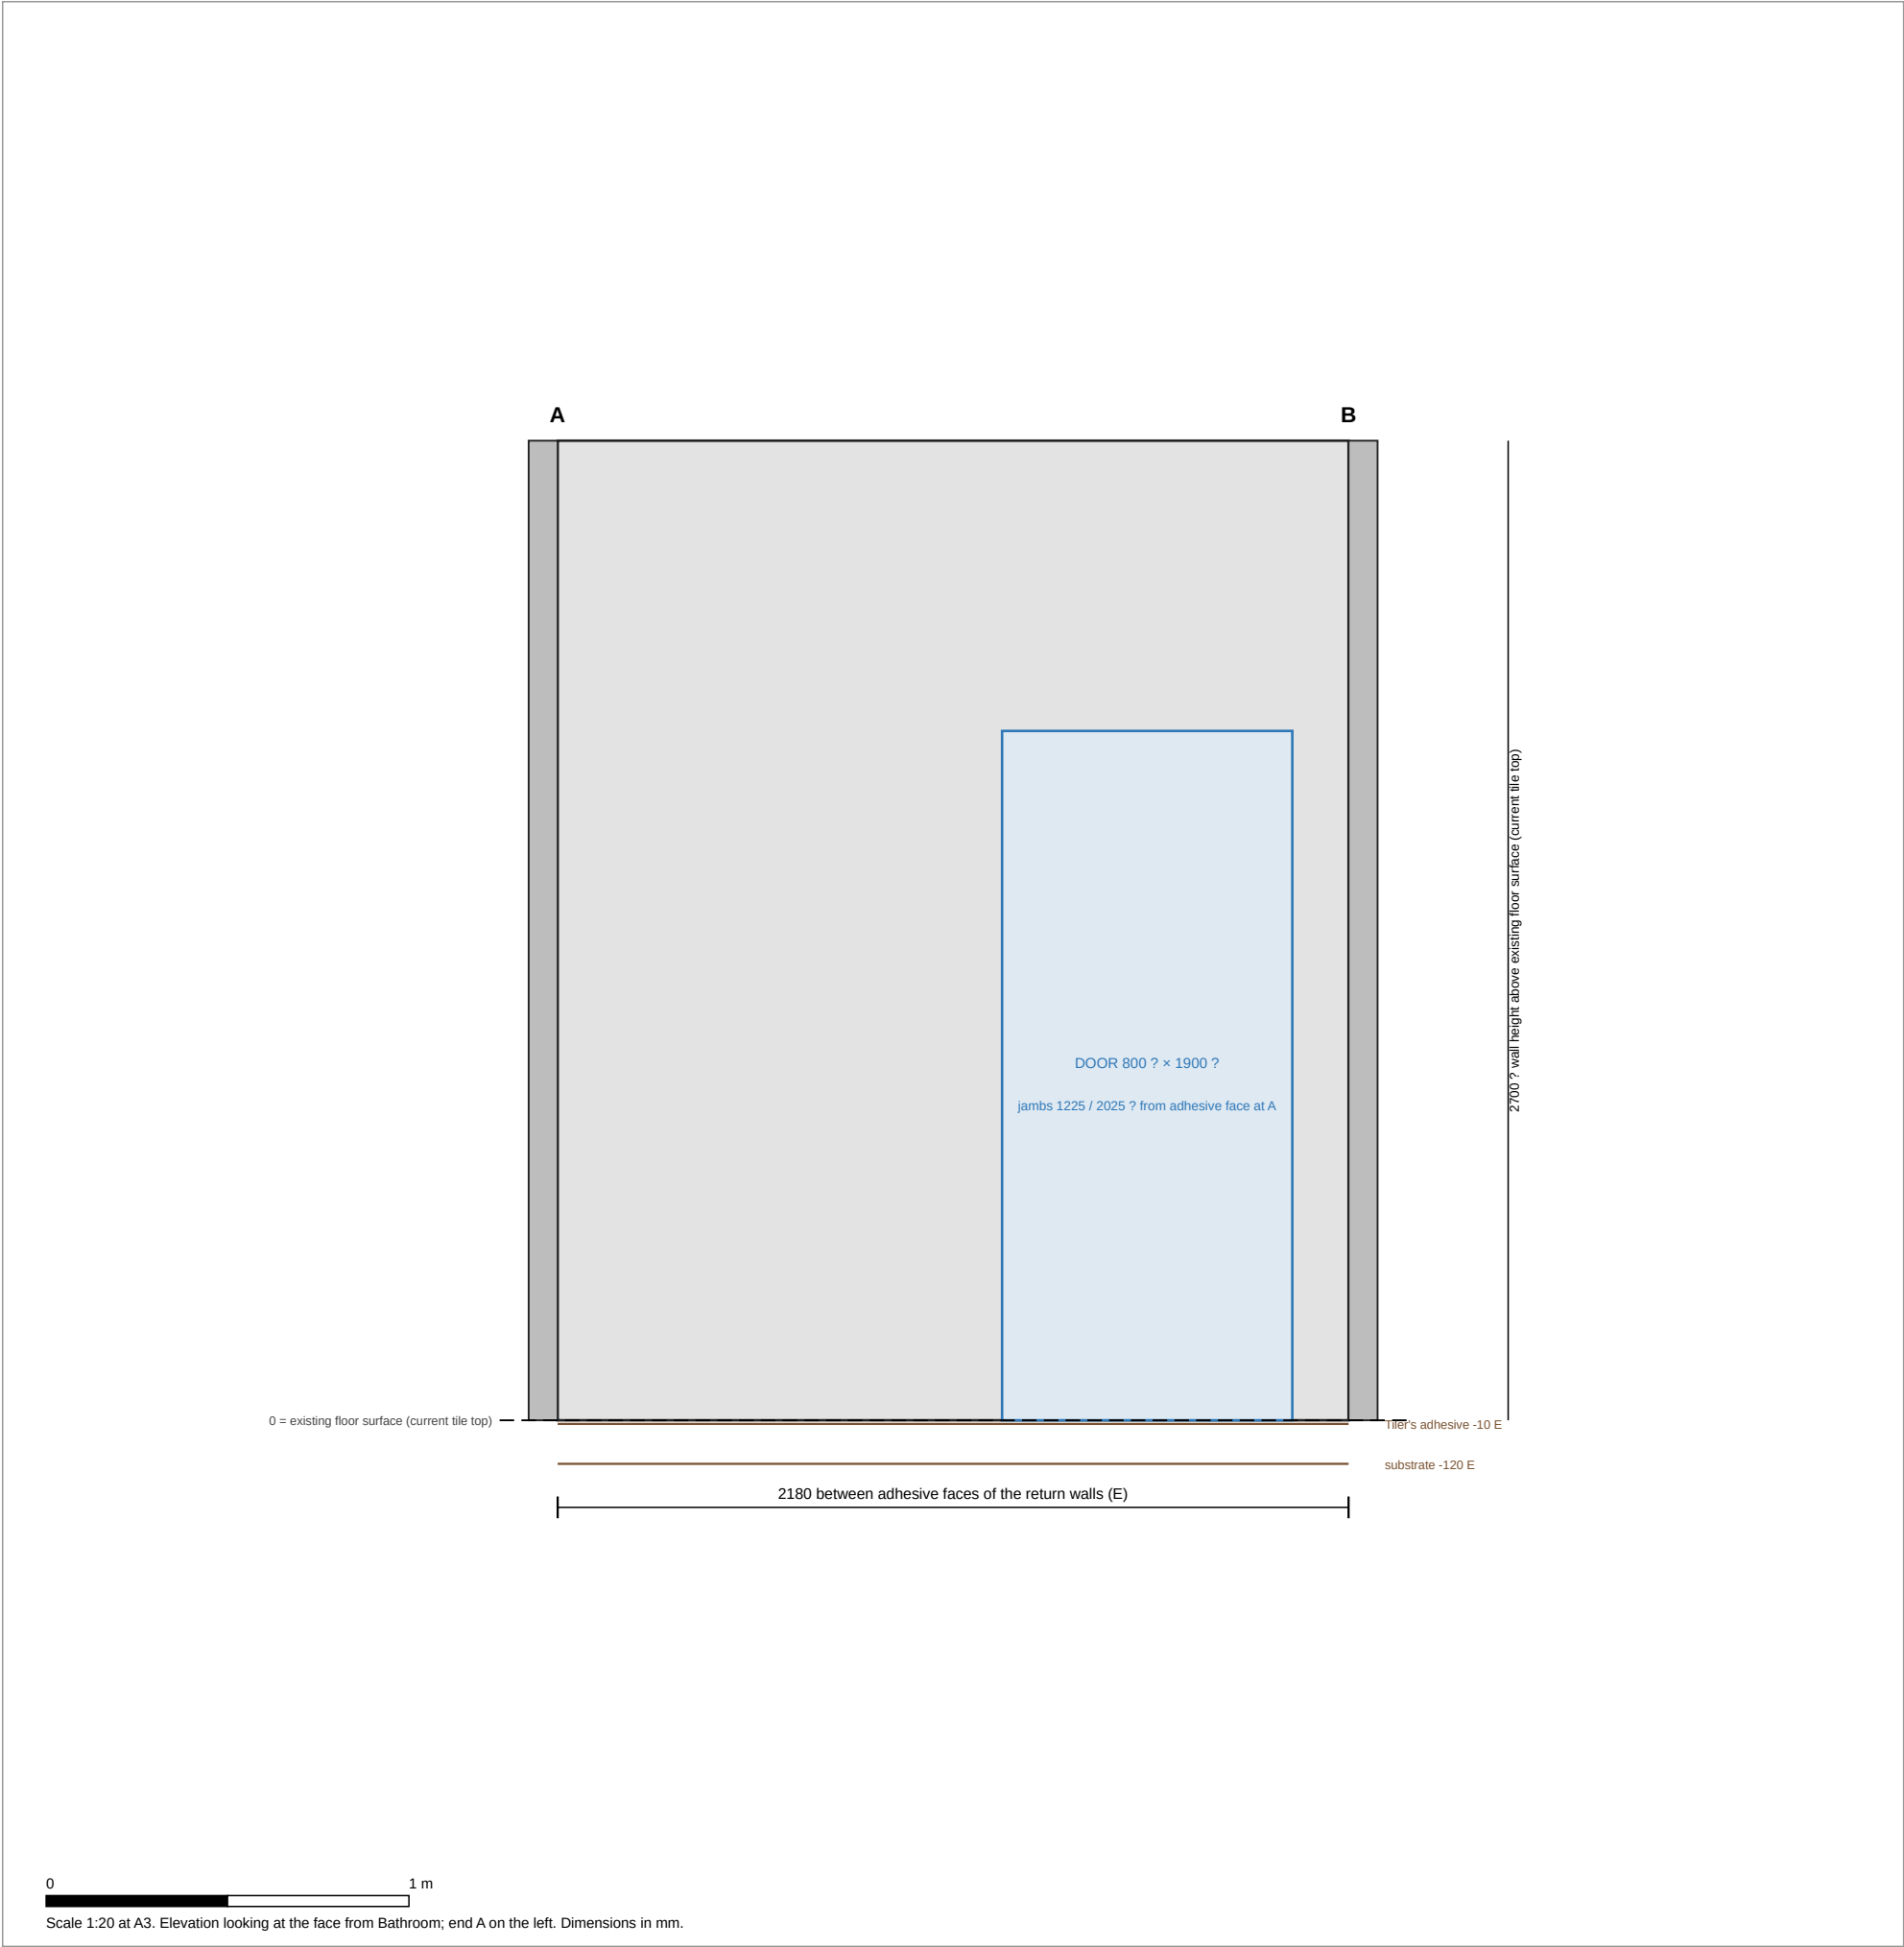

Stage: 7. Tile adhesive, floor and walls

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_e (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_w (right side) at 2195 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 7. Tile adhesive, floor and walls

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_s (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_n (right side) at 3105 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)




0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

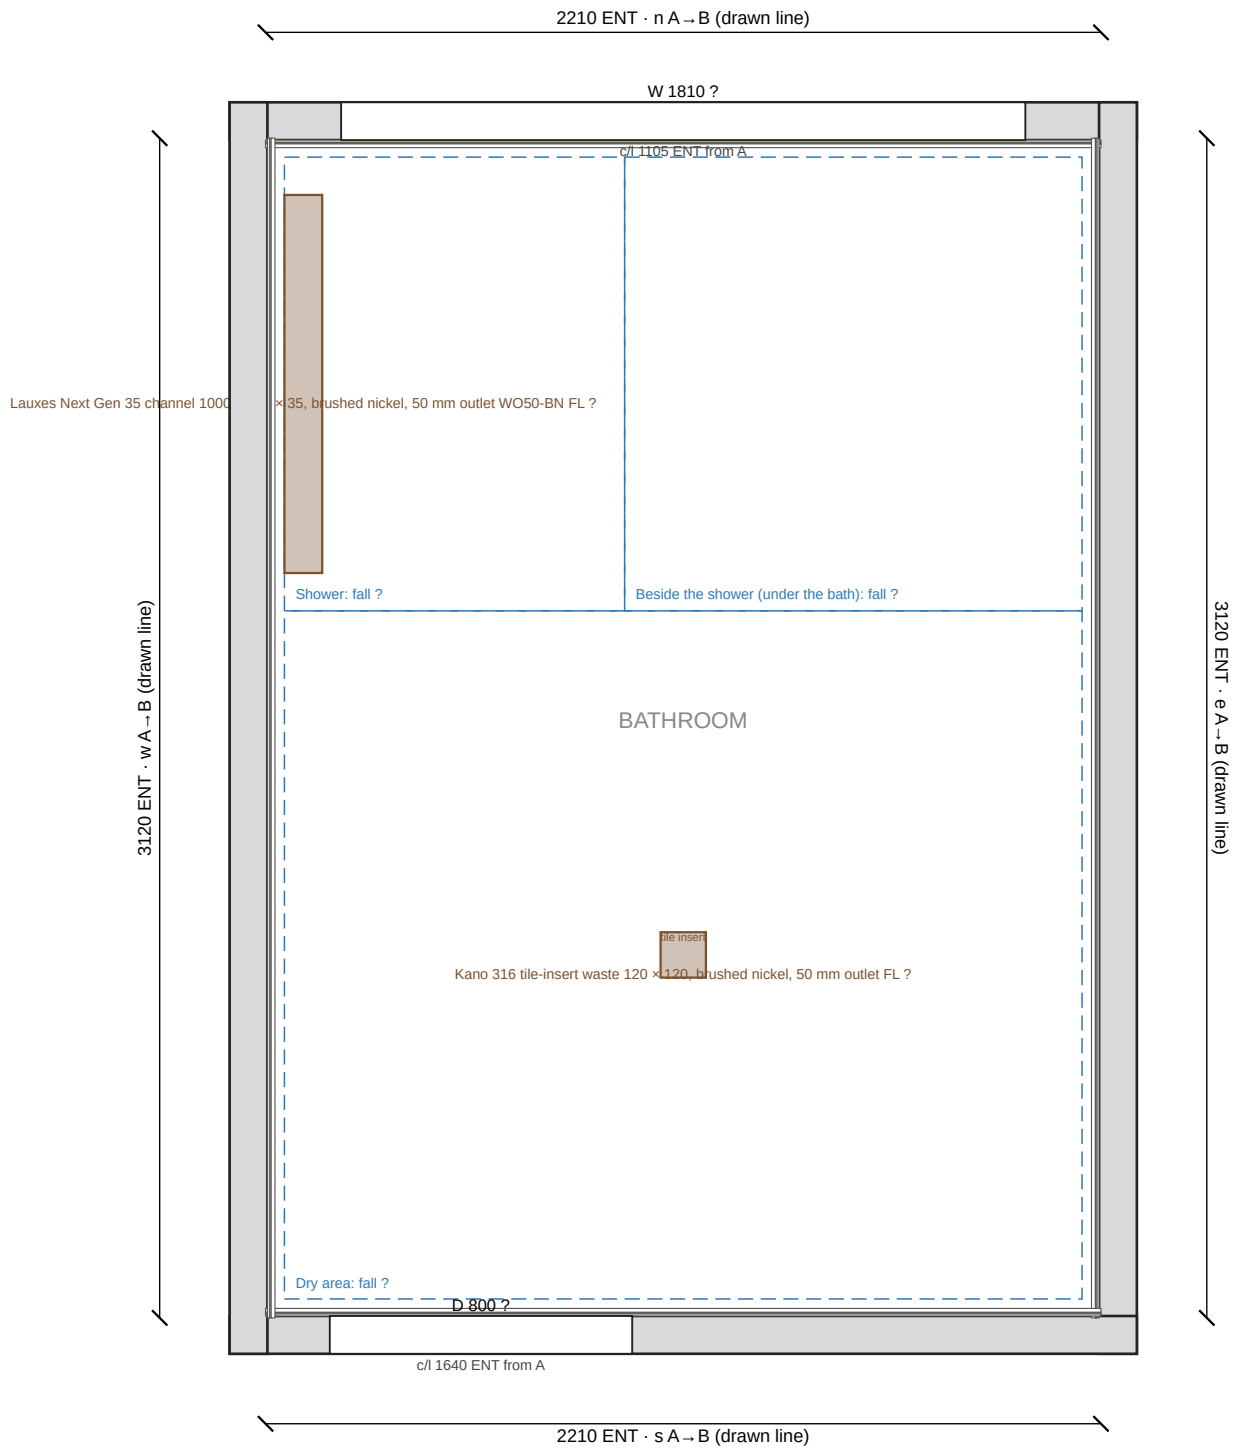

Stage: 8. Tiles laid, floor and walls

Shows 28 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall n right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall n right: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): thickness 10 E · outer face position 25 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall e right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): thickness 10 E · outer face position 25 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall s right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): thickness 10 E · outer face position 25 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
... 2 more: see the specification sheet

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?
Bathroom floor: Tiler's adhesive: thickness ? · top level -10 E
Bathroom floor: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): thickness 10 E · top level 0 P

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
- Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).

... 3 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 8. Tiles laid, floor and walls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

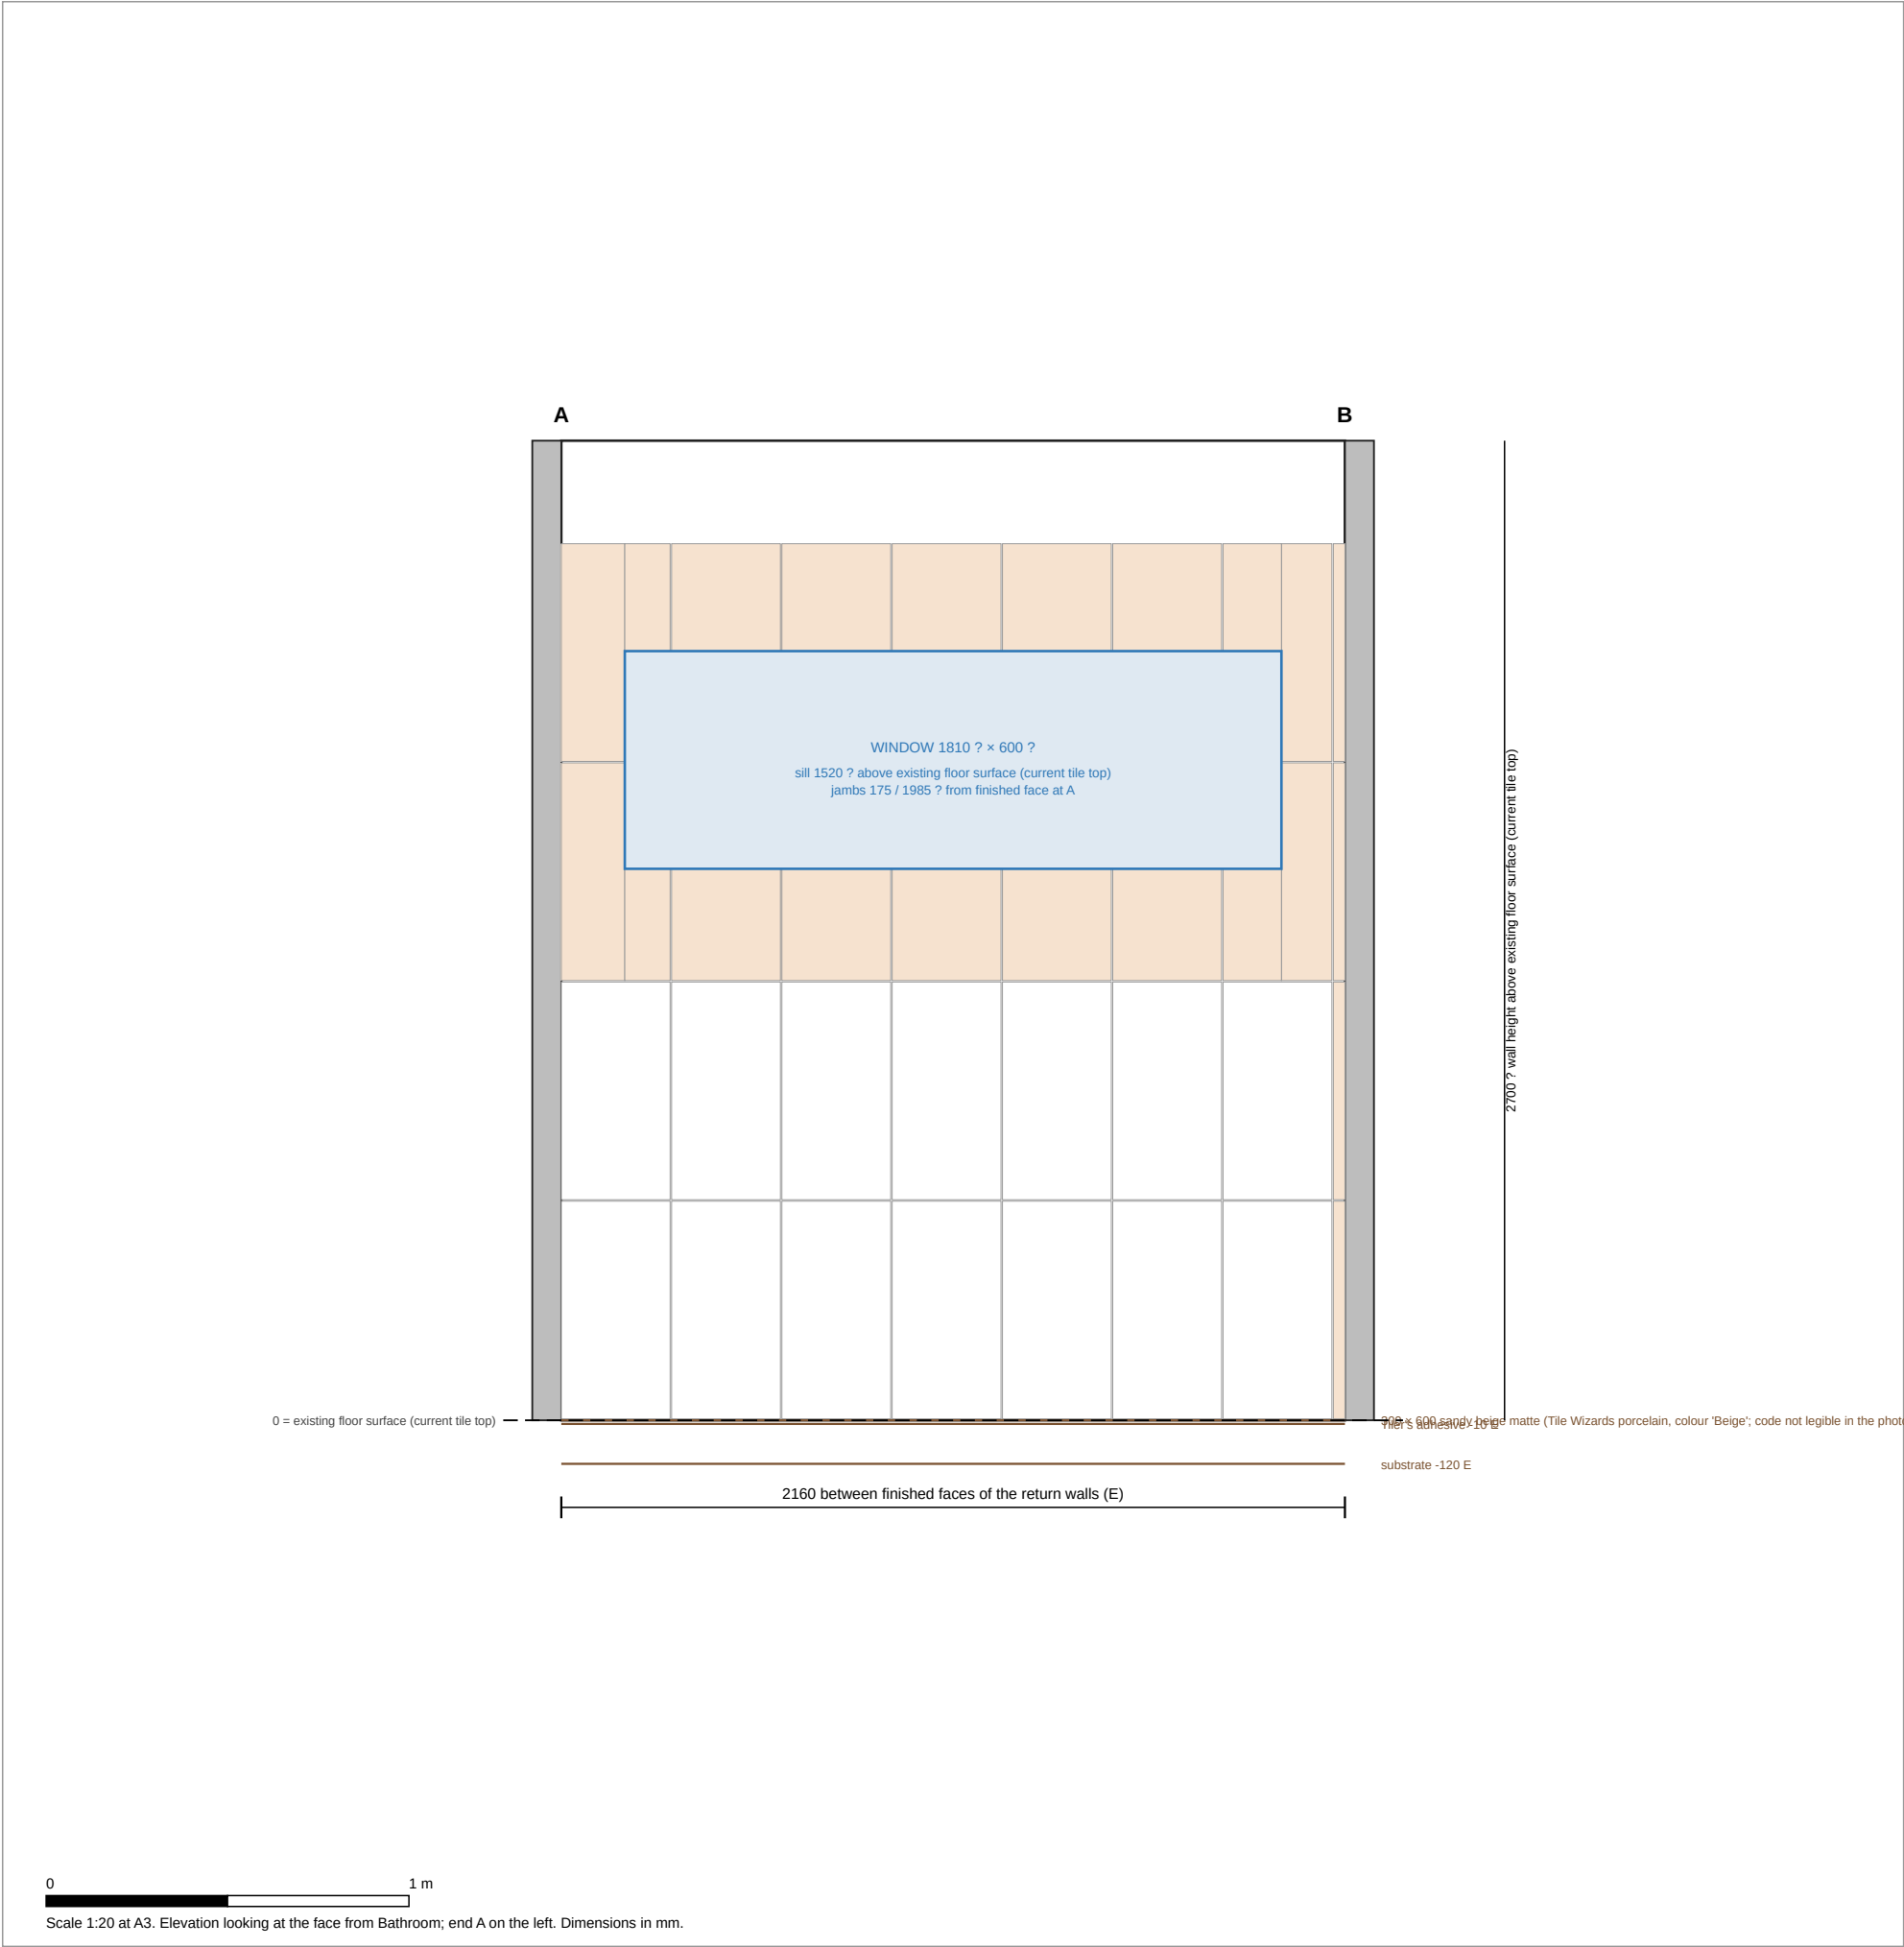

Stage: 8. Tiles laid, floor and walls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_w (right side) at 25 E along the drawn line.
End B: Finished face of wall_e (right side) at 2185 E along the drawn line.
Proposed tile set-out: 8 columns × 4 courses, 22 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall_w_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 8. Tiles laid, floor and walls


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_n (right side) at 25 E along the drawn line.
End B: Finished face of wall_s (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

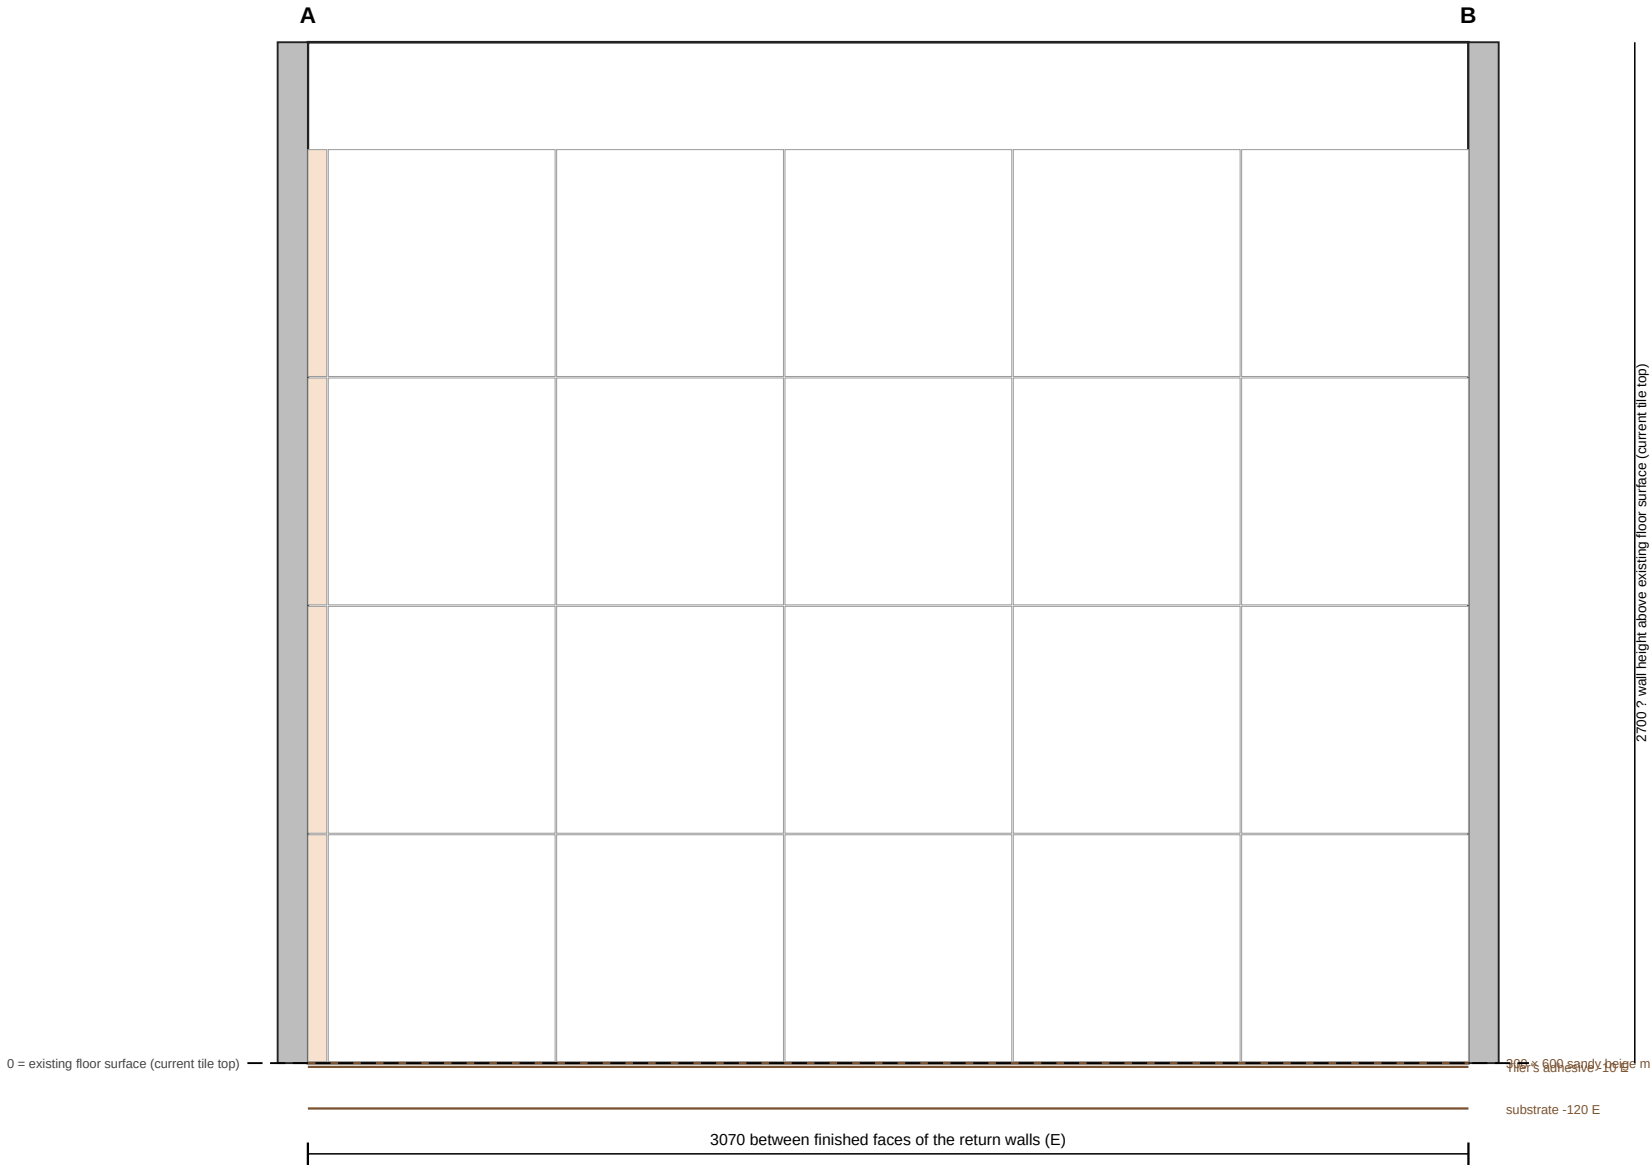


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

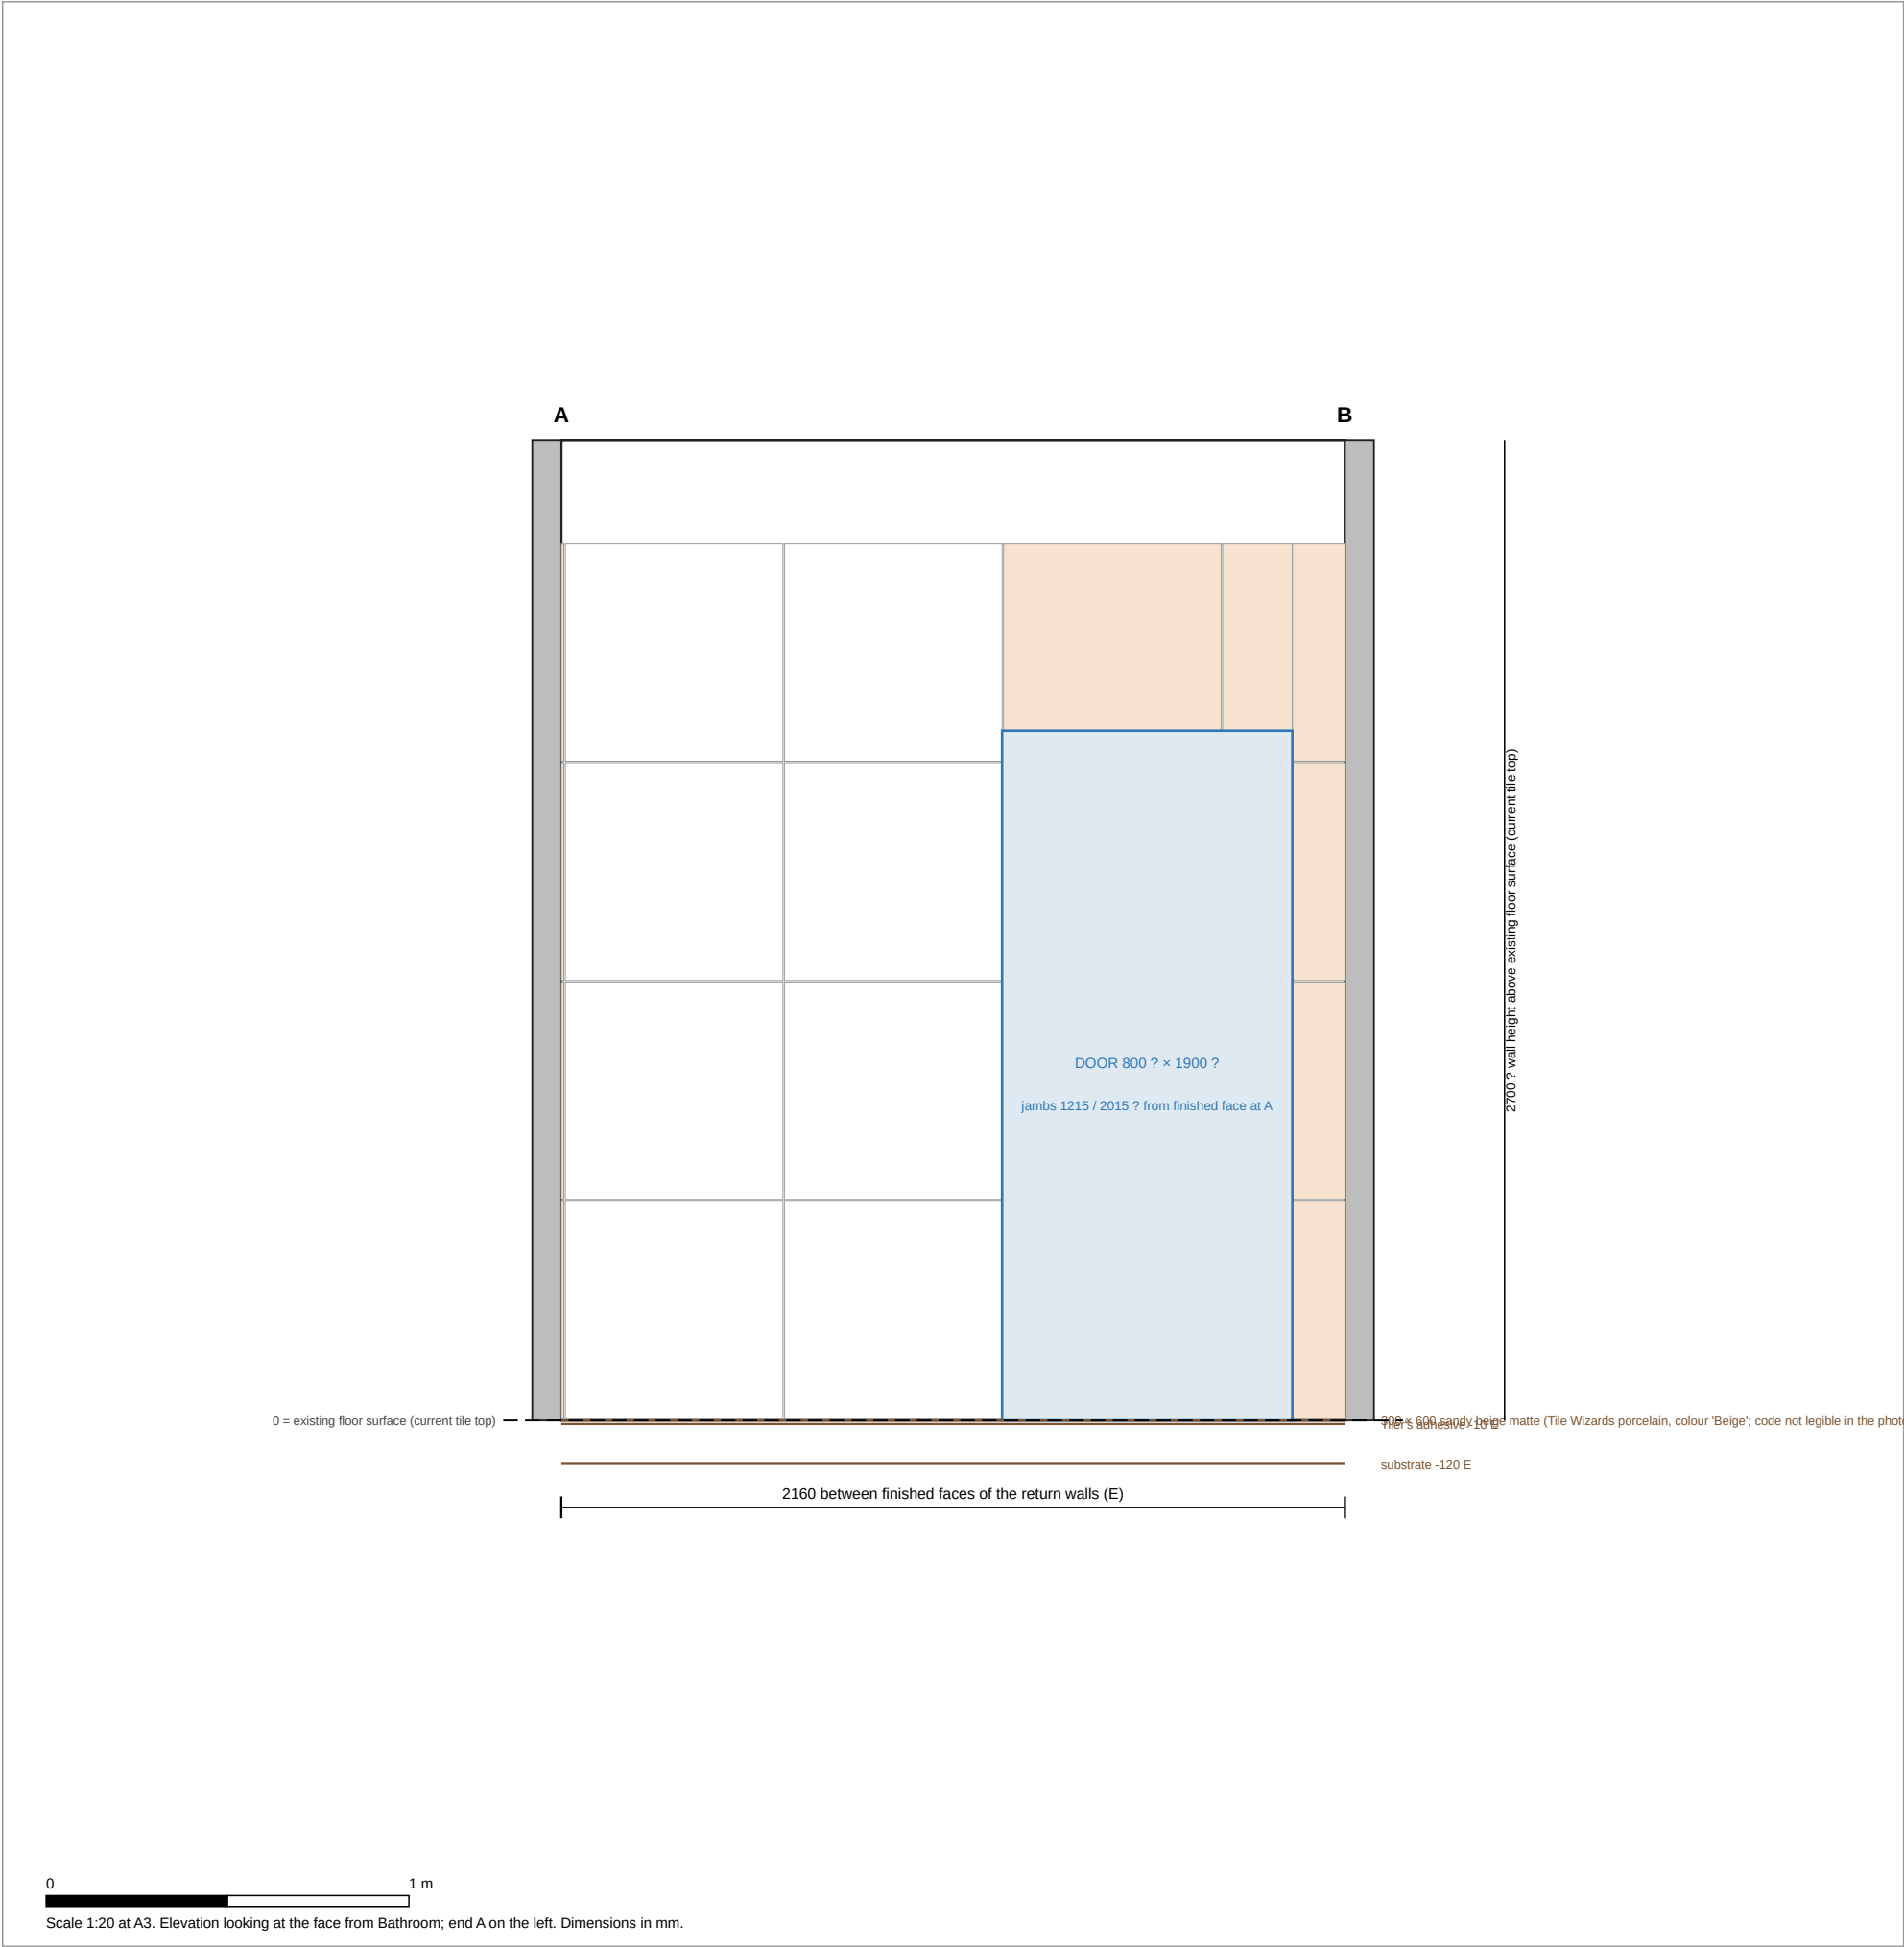

Stage: 8. Tiles laid, floor and walls

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_e (right side) at 25 E along the drawn line.
End B: Finished face of wall_w (right side) at 2185 E along the drawn line.
Proposed tile set-out: 5 columns × 4 courses, 10 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 8. Tiles laid, floor and walls


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_s (right side) at 25 E along the drawn line.
End B: Finished face of wall_n (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

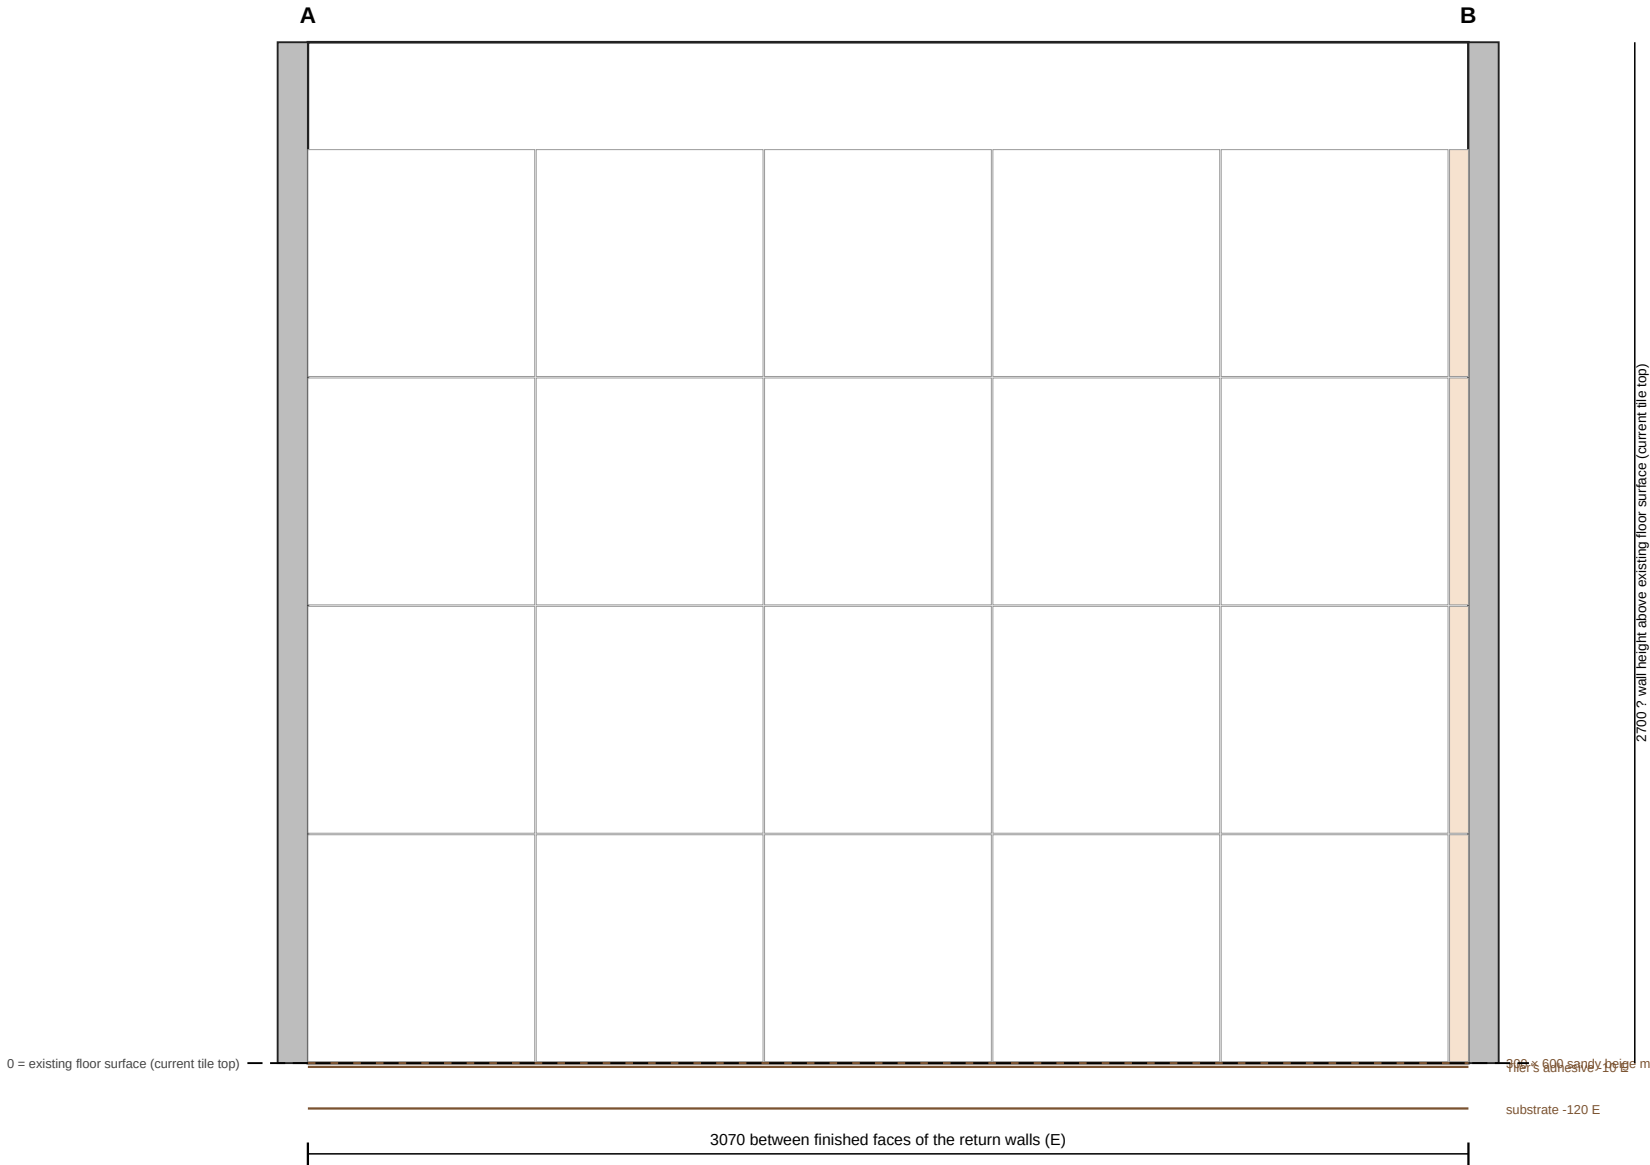

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.

Shown to: finished face (300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)), 25 from the drawn line E.

300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): 10 E. Extent on the face is not modelled; drawn over the full face.

End A: Finished face of wall_w (right side) at 25 E along the drawn line.

End B: Finished face of wall_e (right side) at 2185 E along the drawn line.

Proposed tile set-out: 8 columns × 4 courses, 22 cut pieces (see the wall tiling sheet for cuts).


substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 x 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

F1 Corner bath: position along the face ? (no wall set-out recorded) · 0 P to 630 P above existing floor surface (current tile top)
· stands on the finished floor; height from the kind's envelope

F3 Bath waste: position along the face ? (no wall set-out recorded) · height ? · elevation above the finished floor is not recorded;
the kind's catalogue stand-in is not used, so it is not drawn

- Corner bath (bath): set-out unknown; printed as "?" (missing not set out from a wall face).
- Corner bath (bath): wasteFromEnd unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is $520/\sqrt{2} \approx 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd).
- Corner bath (bath): wasteEnd unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): wasteFromSide unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is $520/\sqrt{2} \approx 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide).
- Corner bath (bath): wasteConnectionDiameter unknown; printed as "?" (missing The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.).
- Corner bath (bath): surround unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): surroundDetail unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): set-out unknown; printed as "?" (missing not set out from a wall face).

... 5 more: see the specification sheet




Site / room: Bathroom (no site address recorded)

Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

Bathroom Concept · wall set (drawings) · 2026-10-08 · page 46 of 55

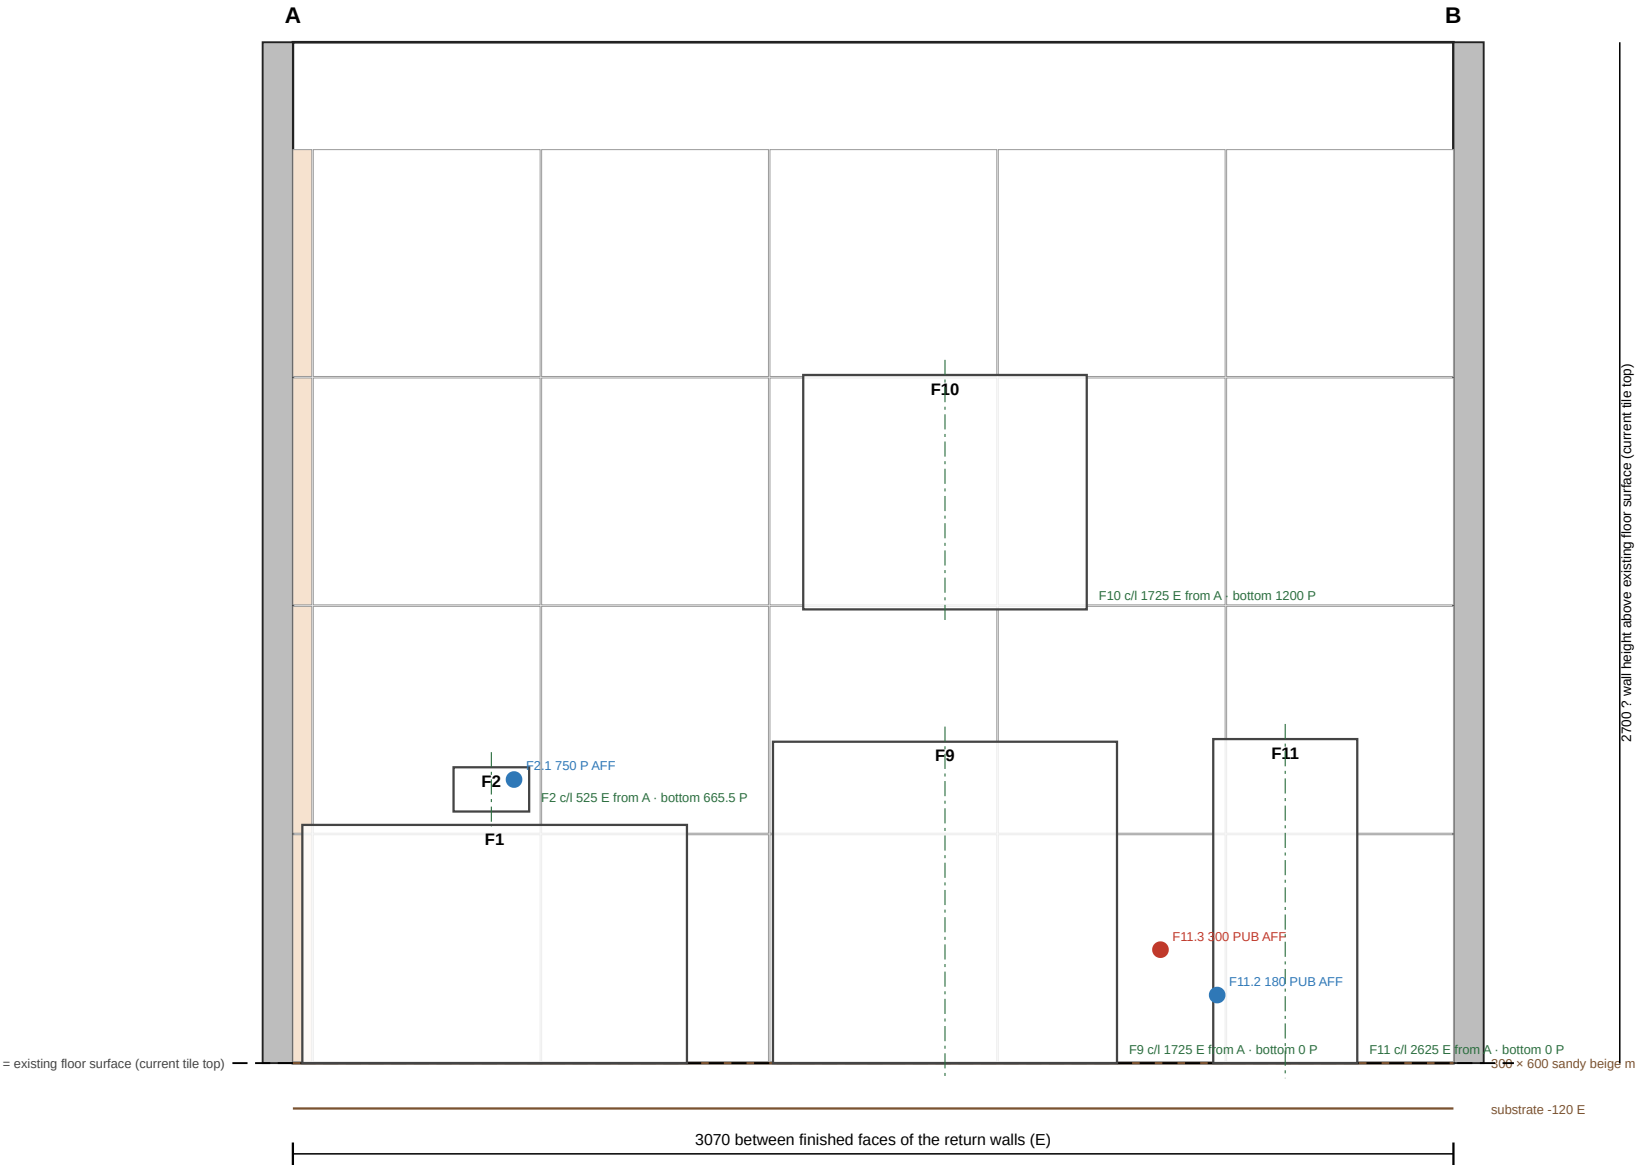

Stage: 9. Fit-out: fixtures and their service points

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_n (right side) at 25 E along the drawn line.
End B: Finished face of wall_s (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Fixtures against this face

F1 Corner bath: position along the face ? (no wall set-out recorded) · 0 P to 630 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F2 Bath mixer and spout: 425 E from finished face at A to 625 E · 665.5 P to 782.5 P above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the lever end (envelope bottom); plate centre is the owner's proposed 750 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F11 Toilet: 2434.5 E from finished face at A to 2815.5 E · 0 P to 857 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F9 Vanity: 1270 E from finished face at A to 2180 E · 0 P to 850 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F10 Shaving cabinet: 1350 E from finished face at A to 2100 E · 1200 P to 1820 ? above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.
F3 Bath waste: position along the face ? (no wall set-out recorded) · height ? · elevation above the finished floor is not recorded; the kind's catalogue stand-in is not used, so it is not drawn
F4 Basin mixer: 1701 E from finished face at A to 1749 E · height ? · elevation above the finished floor is not recorded; the kind's catalogue stand-in is not used, so it is not drawn

Service points (AFF = above finished floor)

F2.1 water · Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): 585 E from finished face at A · 750 P above finished floor · 0 P out from finished face
F11.1 waste · Pan waste, S-trap (floor): 2625 E from finished face at A · up ? · 140–260 PUB out from finished face
F11.2 water · Cold water point (stop tap): 2445 E from finished face at A · 180 PUB above finished floor · 0 PUB out from finished face
F11.3 power · SpaLet seat power point: 2295 E from finished face at A · 300 PUB above finished floor · 0 PUB out from finished face


Unresolved on this face (36)

- Corner bath (bath): set-out unknown; printed as "?" (missing not set out from a wall face).
- Corner bath (bath): wasteFromEnd unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd.).
- Corner bath (bath): wasteEnd unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): wasteFromSide unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide.).
- Corner bath (bath): wasteConnectionDiameter unknown; printed as "?" (missing The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.).
- Corner bath (bath): surround unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): surroundDetail unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): tapHoles unknown; printed as "?" (missing Not entered from the cited source.).
- ... 28 more: see the specification sheet

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

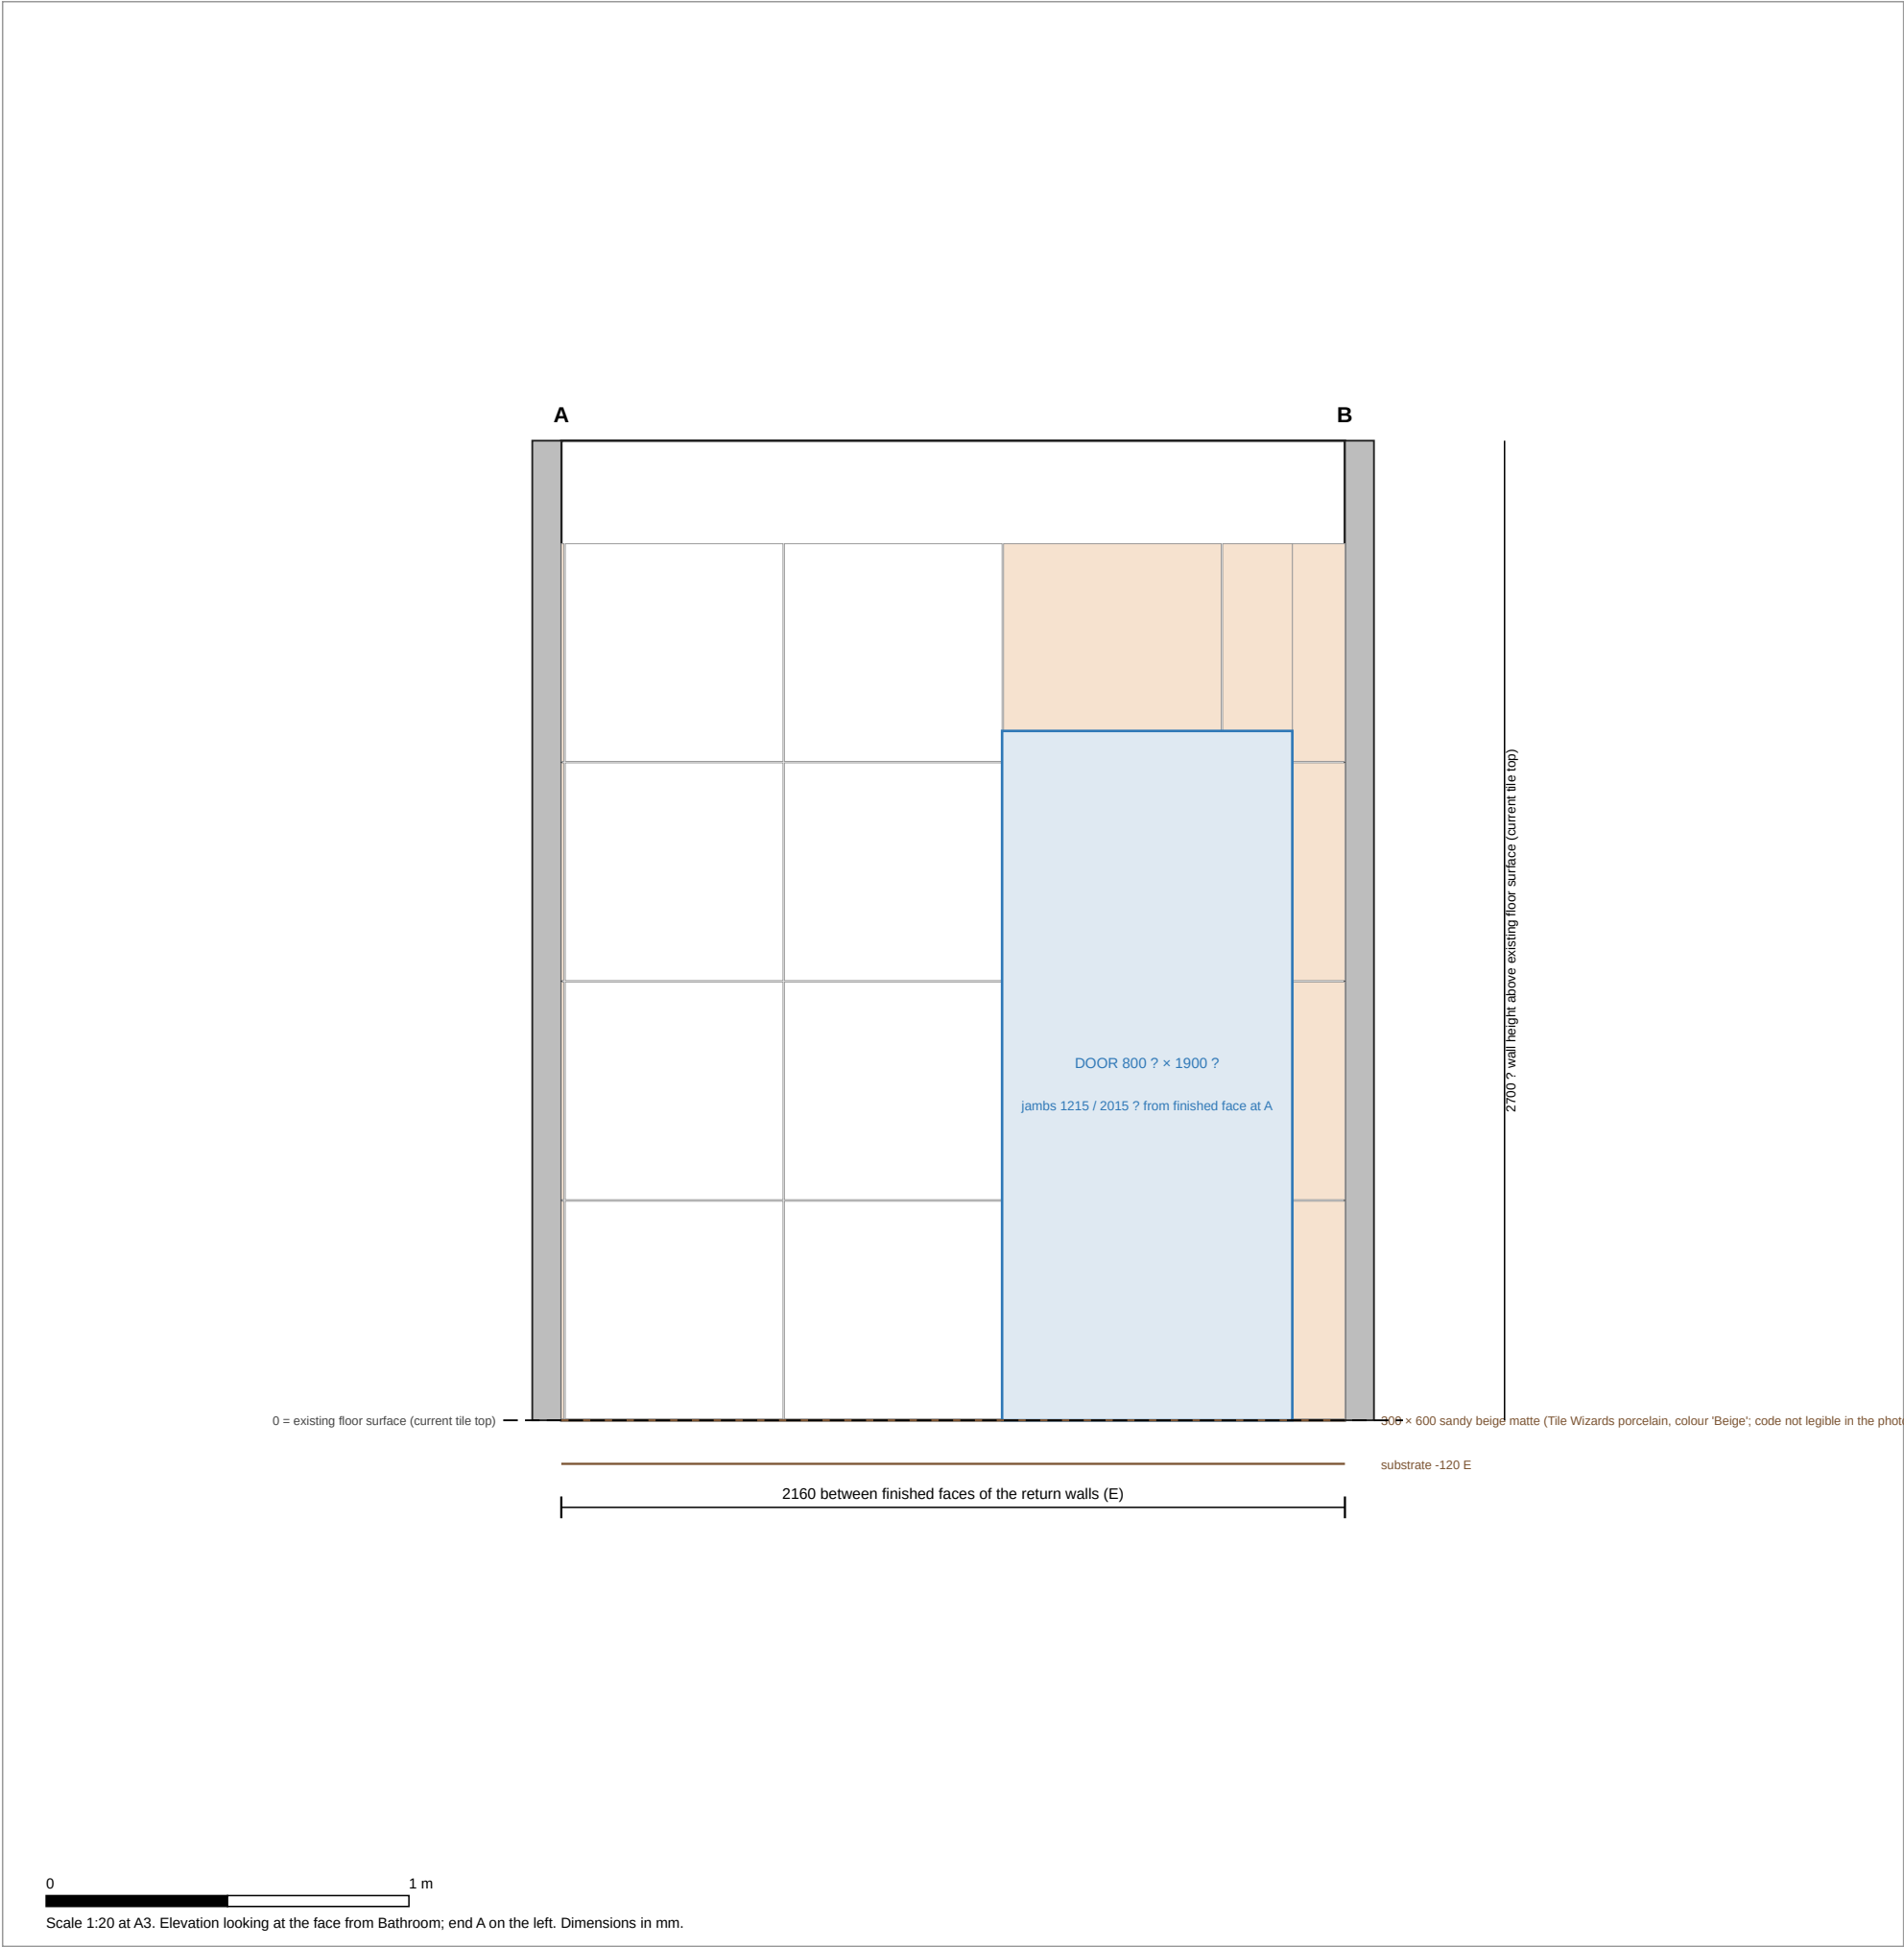

Stage: 9. Fit-out: fixtures and their service points

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_e (right side) at 25 E along the drawn line.
End B: Finished face of wall_w (right side) at 2185 E along the drawn line.
Proposed tile set-out: 5 columns × 4 courses, 10 cut pieces (see the wall tiling sheet for cuts).


Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

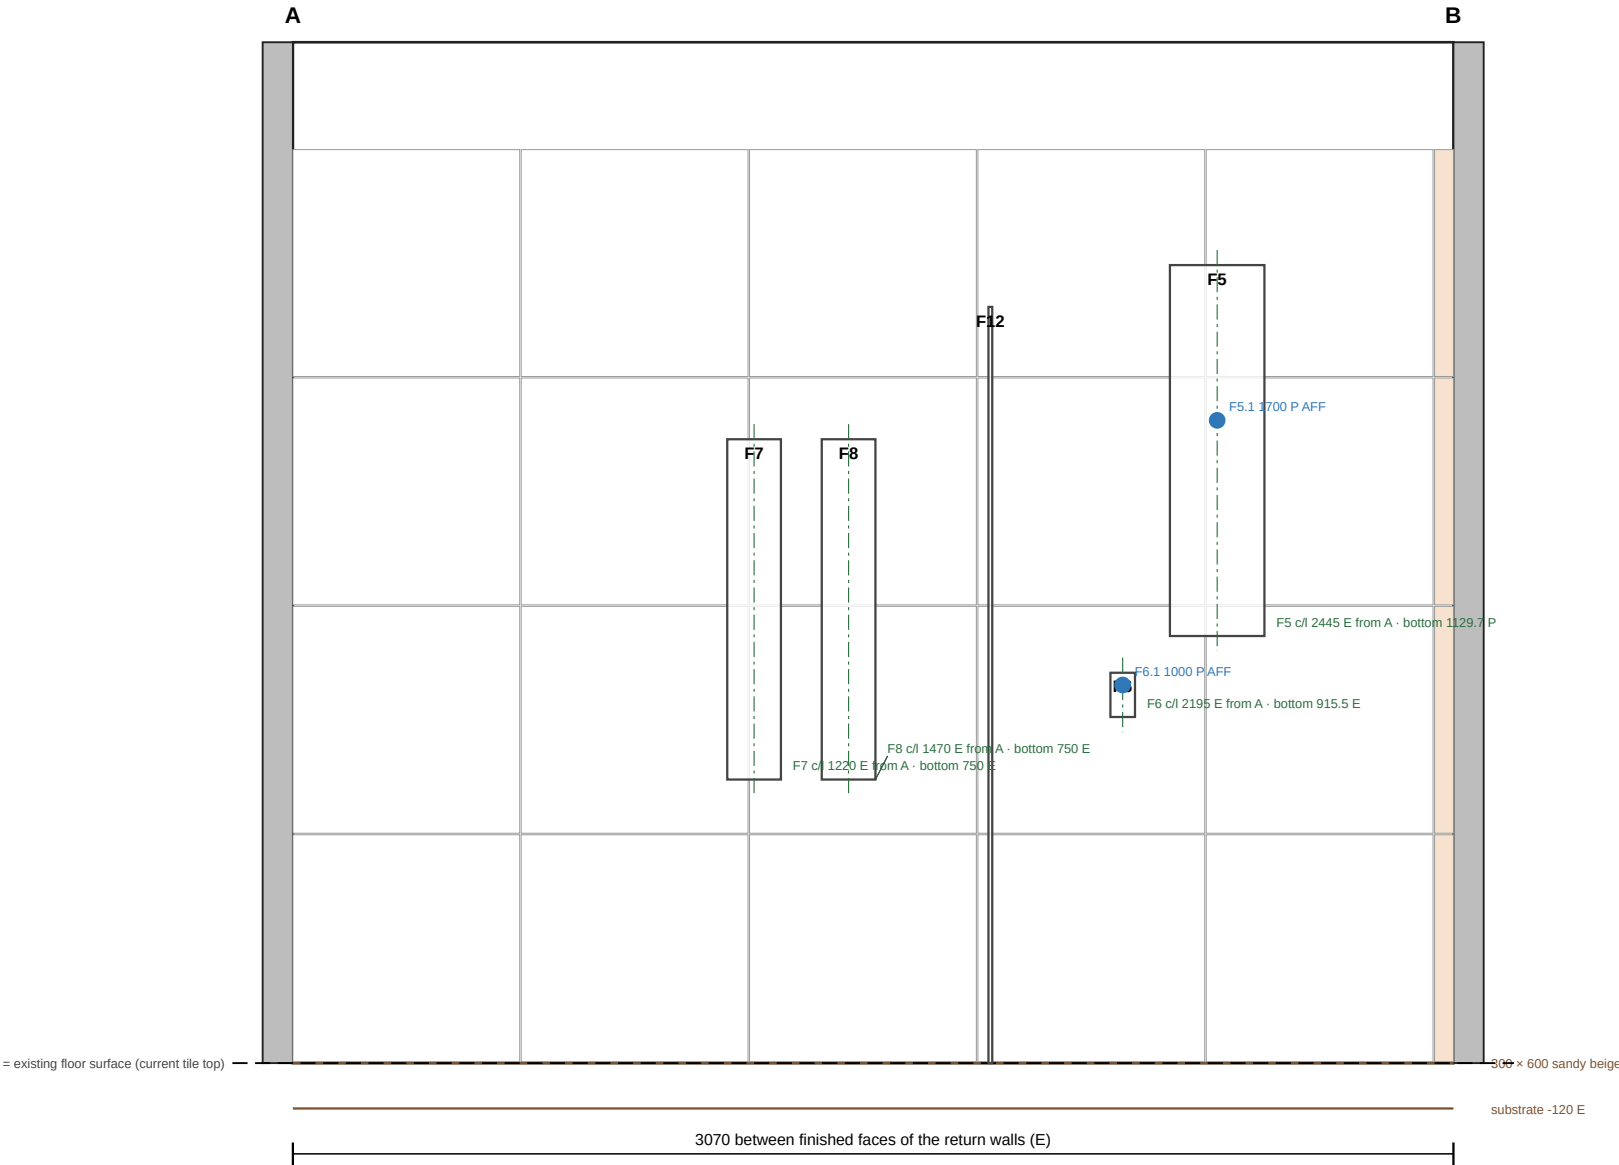

Stage: 9. Fit-out: fixtures and their service points

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_s (right side) at 25 E along the drawn line.
End B: Finished face of wall_n (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Fixtures against this face

F12 Fixed glass screen: position along the face ? (no wall set-out recorded) · 0 P to 2000 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F6 Shower mixer: 2162.5 E from finished face at A to 2227.5 E · 915.5 E to 1032.5 ? above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the lever end (envelope bottom); plate centre is the owner's proposed 1000 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F5 Shower system: 2320 E from finished face at A to 2570 E · 1129.7 P to 2110.7 P above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the rail foot, 70.3 mm below the lower bracket (derived); lower bracket is the owner's proposed 1200 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F7 Towel rail: 1149 E from finished face at A to 1291 E · 750 E to 1650 E above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.
F8 Towel rail: 1399 E from finished face at A to 1541 E · 750 E to 1650 E above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.

Service points (AFF = above finished floor)

F5.1 water · G1/2 inlet at the upper wall rose (on the rail centreline): 2445 E from finished face at A · 1700 P above finished floor · 0 P out from finished face
F6.1 water · Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): 2195 E from finished face at A · 1000 P above finished floor · 0 P out from finished face


Unresolved on this face (35)

- Shower system (shower_system): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): pressureMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): temperatureMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): adjustmentMin unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): adjustmentMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- ... 27 more: see the specification sheet

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

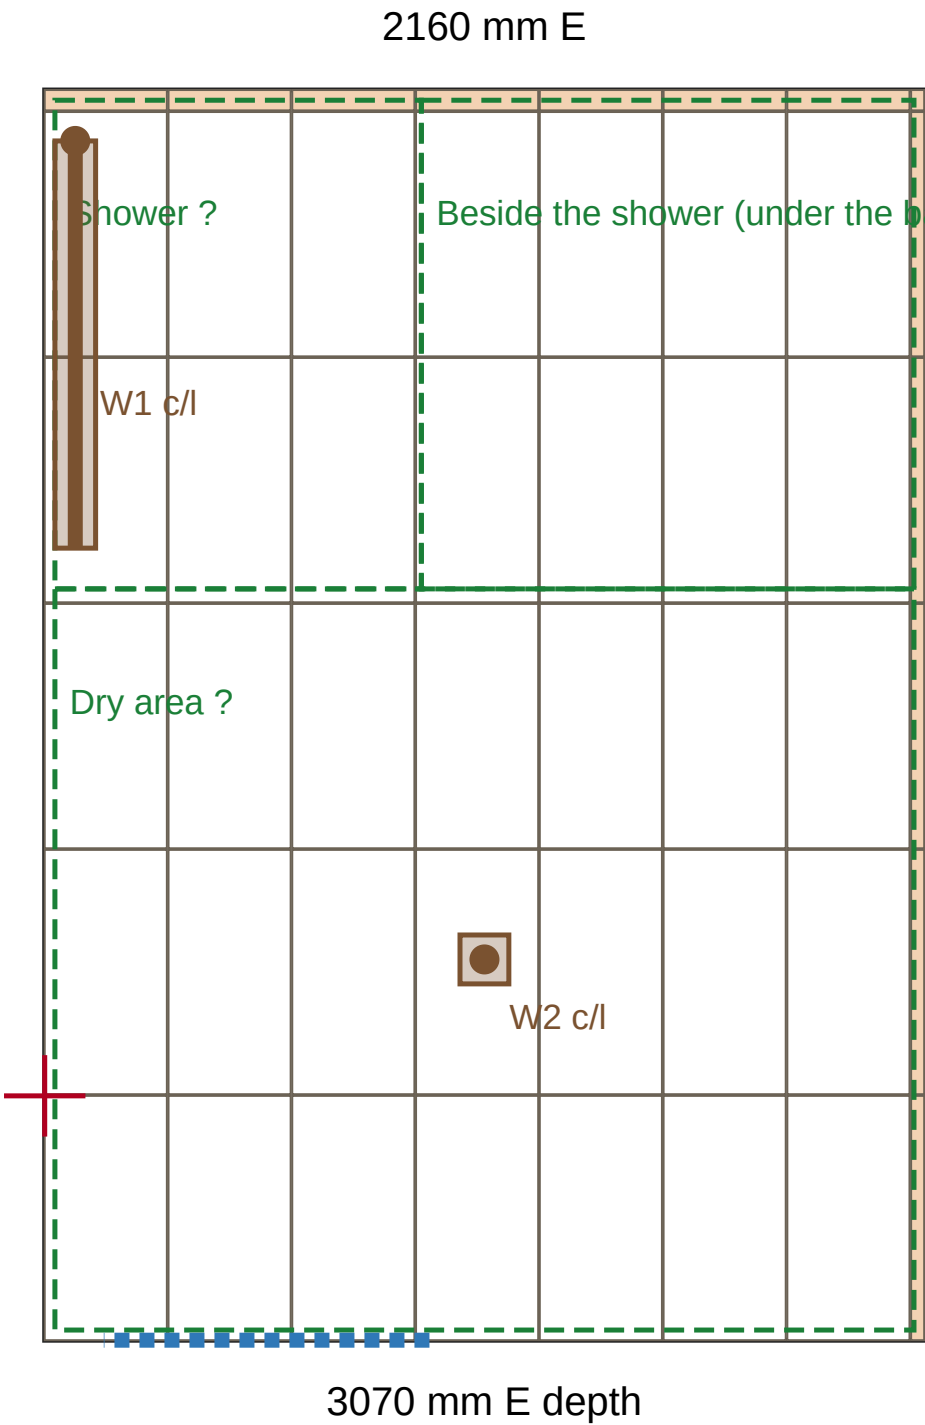

PROPOSED FLOOR TILE SET-OUT · Bathroom Concept · Bathroom

FOR TILER REVIEW · NOT AS-BUILT · NOT FOR ORDERING

Zone: room · long edge axis: y

Origin: a tile's west edge from the finished west face, its south edge from the finished south face.

X 0 P mm · Y 0 P mm

tile length: 600 mm P

tile width: 300 mm P

grout joint: 4 mm P

origin X: 0 mm P

origin Y: 0 mm P

west: finished face of wall_w (right): -25 mm E

east: finished face of wall_e (right): 2135 mm E

north: finished face of wall_n (right): -25 mm E

south: finished face of wall_s (right): 3045 mm E

west cut: 300 (full) mm

east cut: 32 mm

north cut: 50 mm

south cut: 600 (full) mm

Legend: orange cut · white full · red origin axes

Green dashed fall planes · brown waste c/l, shaded grate from its drain brief · blue doorway

SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown

Confirm perimeter / doorway joints, drain apertures and slope-break cuts.

Field note: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo). Long side runs toward the window wall and continues up it. Full tiles start at the doorway.

W1 Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet

WO50-BN: centre line start: X 75 mm after a tile start (over tile), Y 71 mm after a tile start (over tile); end: X 75 mm after a tile start (over tile), Y 467 mm after a tile start (over tile); grate 100 × 1000 mm; west edge 25 mm after a tile start (over tile), east edge 125 mm after a tile start (over tile), north edge 71 mm after a tile start (over tile), south edge 467 mm after a tile start (over tile)

W2 Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: centre point: X 168 mm after a tile start (over tile), Y 269 mm after a tile start (over tile); grate 120 × 120 mm; west edge 108 mm after a tile start (over tile), east edge 228 mm after a tile start (over tile), north edge 209 mm after a tile start (over tile), south edge 329 mm after a tile start (over tile); tile insert: cut a tile piece to fill the insert as well as the opening around it

UNRESOLVED: door door_s transition: finished face or real clear width unresolved

UNRESOLVED: fall plane Shower: slope/levels unresolved

UNRESOLVED: fall plane Beside the shower (under the bath): slope/levels unresolved

UNRESOLVED: fall plane Dry area: slope/levels unresolved

REVIEW: Plane "Shower" has no derived heights: unknown Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level.

REVIEW: Plane "Beside the shower (under the bath)" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.


REVIEW: Plane "Dry area" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.

REVIEW: Grate outlines come from the linked drain briefs. Confirm clearance, edge joints and cut shape on site.

REVIEW: east cut is 32 mm: narrow piece for tiler review.

REVIEW: Tiles cross floor-plane boundaries. Confirm slope-break cuts and movement joints with the tiler.

PROPOSED SET-OUT · NOT AS-BUILT

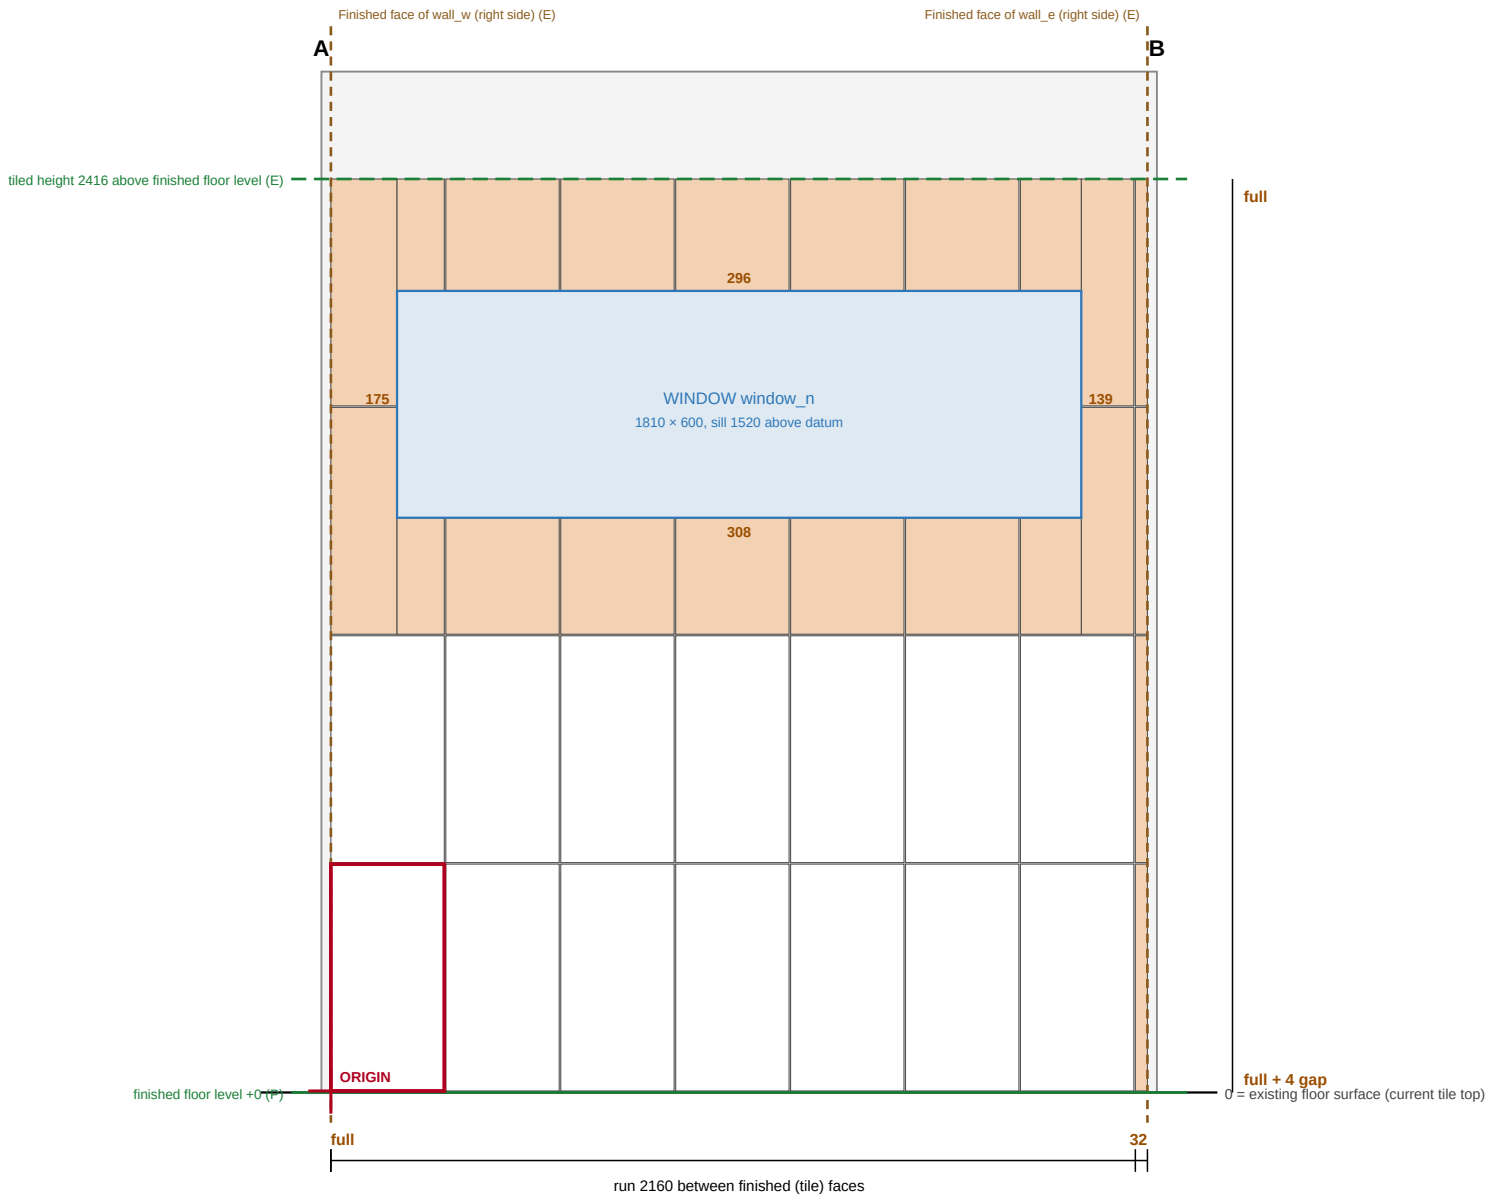

Tile set-out (proposed)

Tile: 600 × 300 mm (P/P), portrait
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end A finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
8 columns × 4 courses, 22 cut pieces of 36

Cuts (mm)

End A cut (to finished (tile) face of wall_w): full
End B cut (to finished (tile) face of wall_e): 32
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full
Window window_n jamb, A side: 175
Window window_n jamb, B side: 139
Window window_n under sill: 308
Window window_n over head: 296


Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_n, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

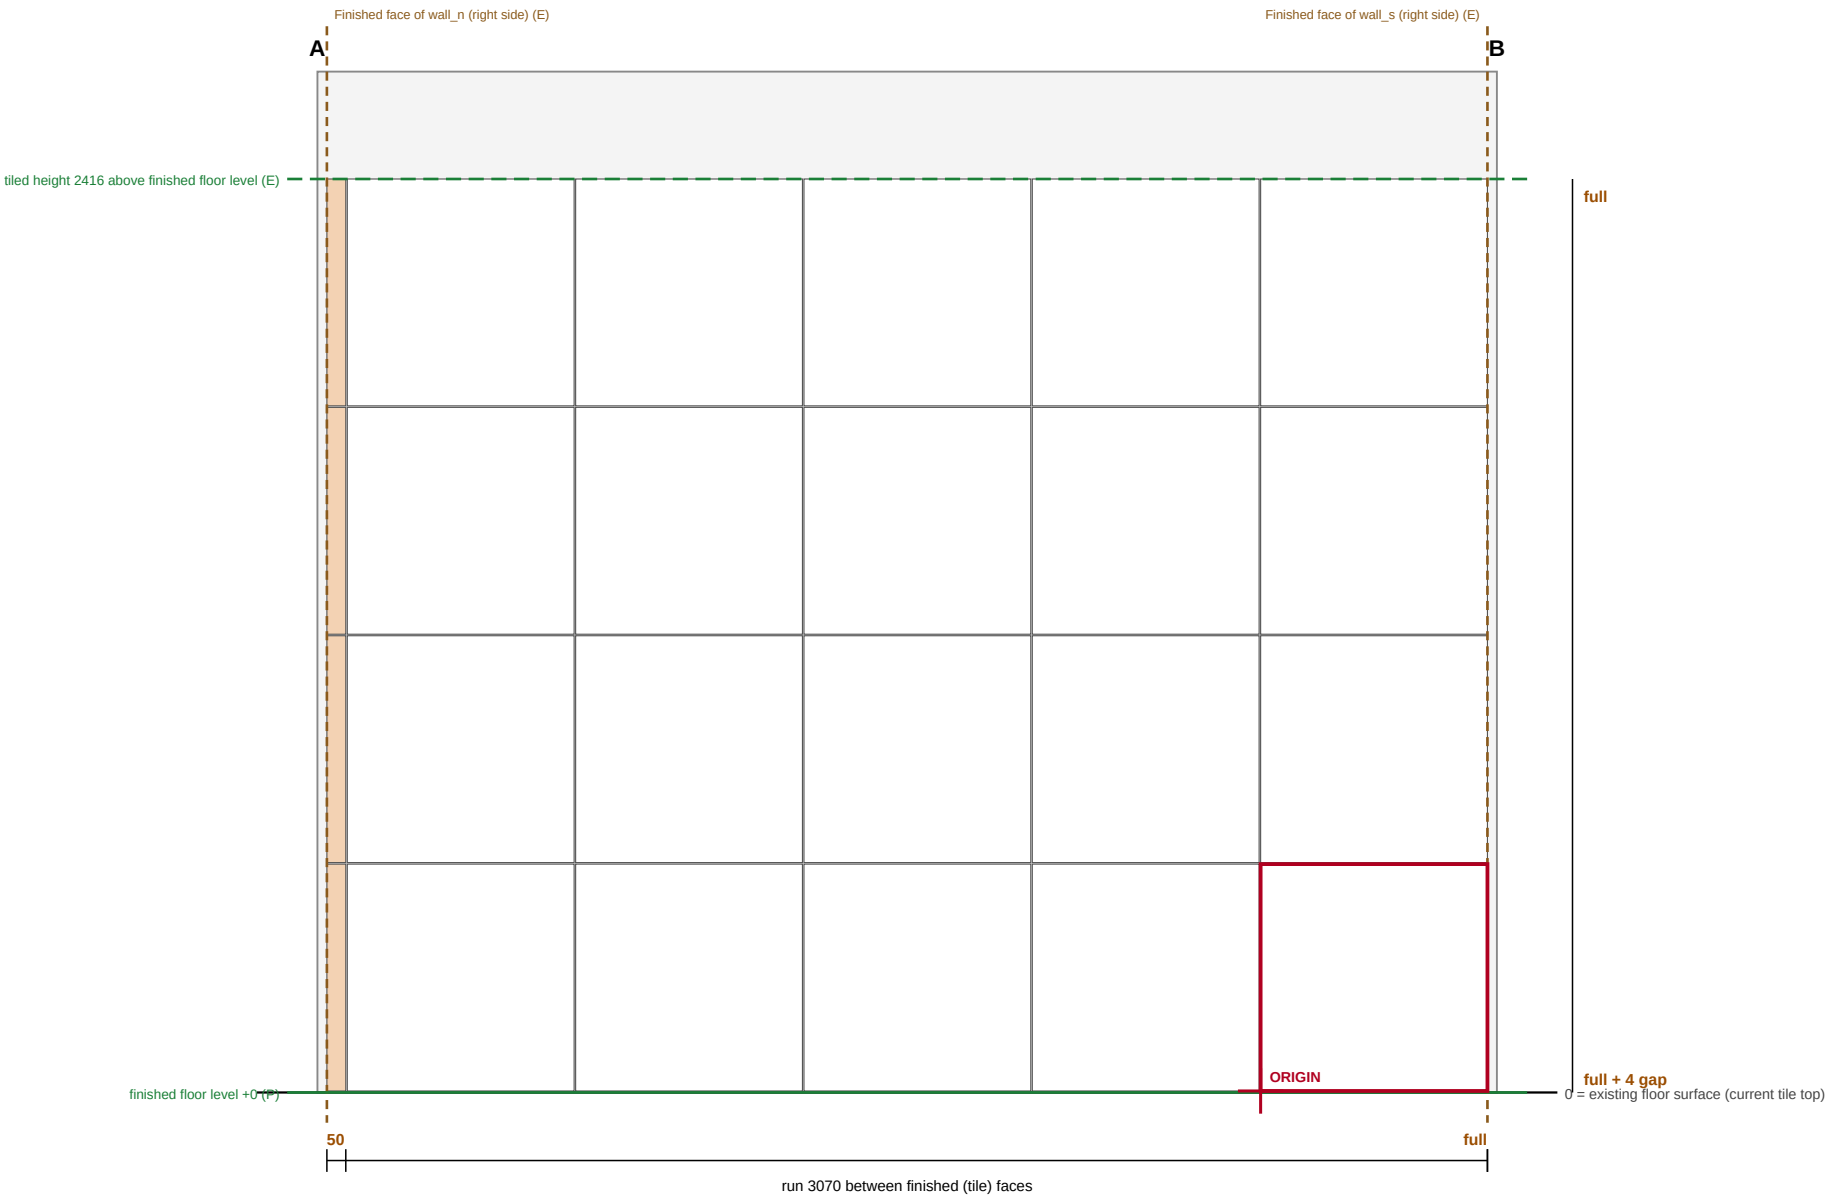

Tile set-out (proposed)

Tile: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end B finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
6 columns × 4 courses, 4 cut pieces of 24

Cuts (mm)

End A cut (to finished (tile) face of wall_n): 50
End B cut (to finished (tile) face of wall_s): full
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full


Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_e, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

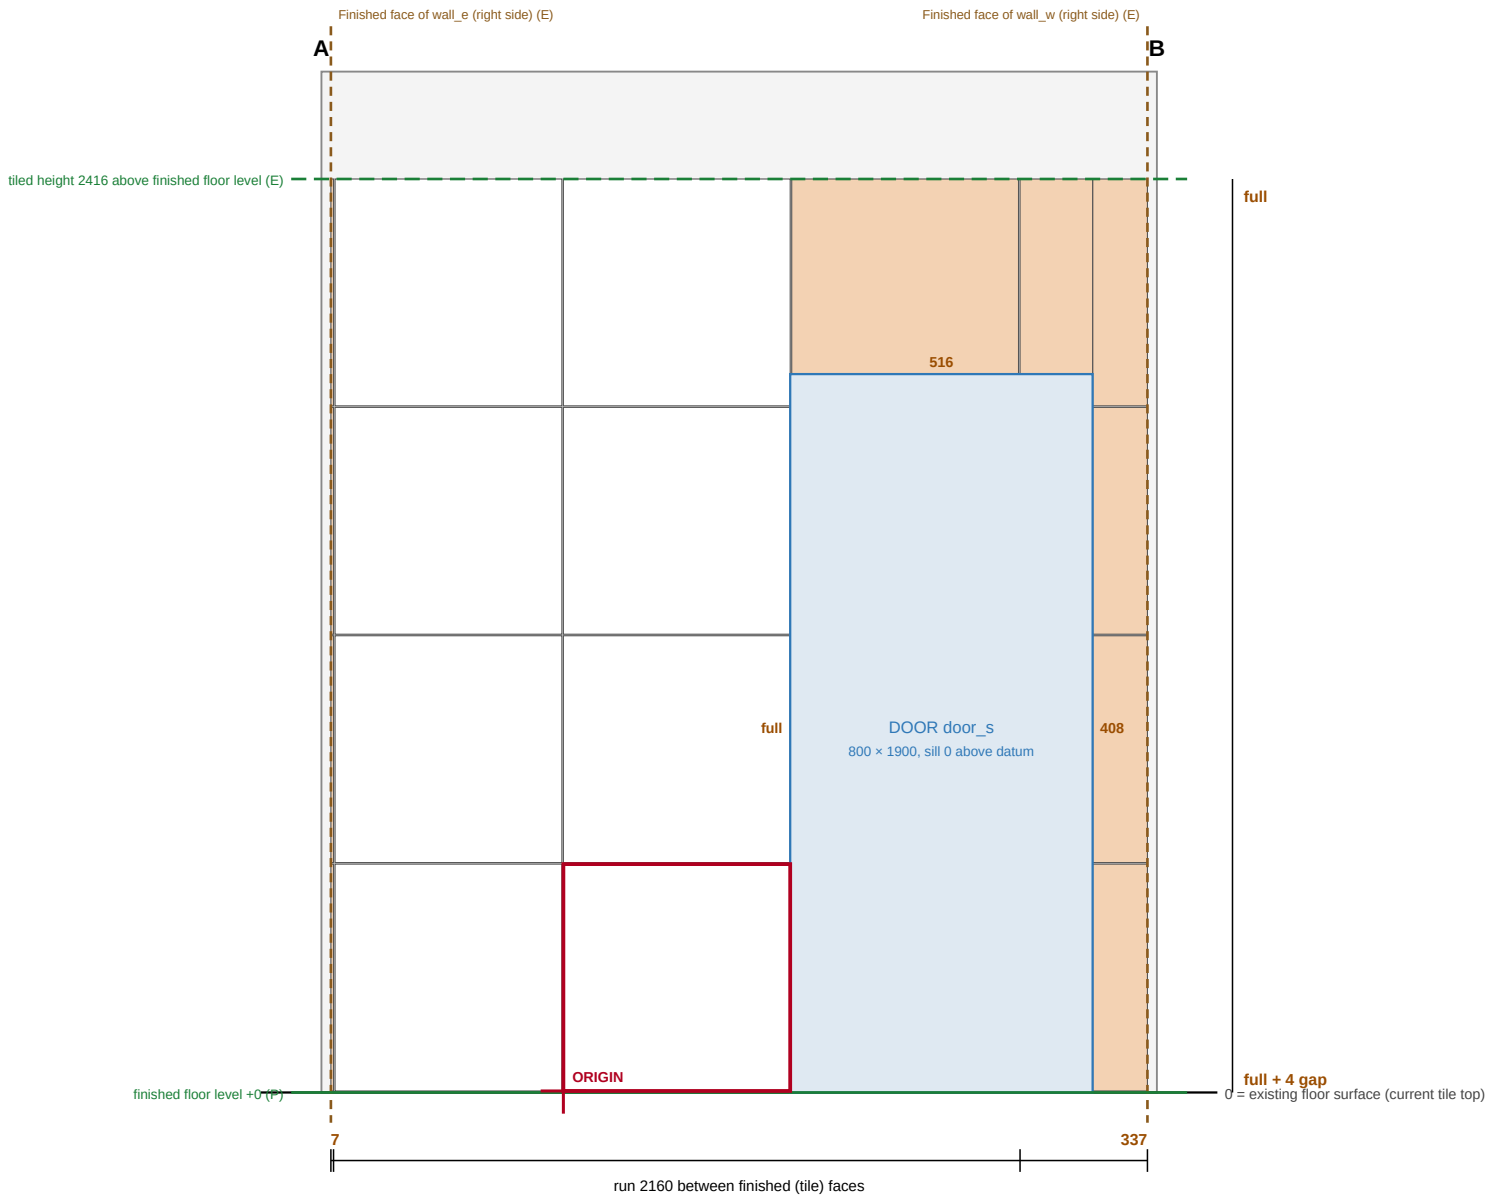

Tile set-out (proposed)

Tile: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from door_s A-side jamb, tiles toward A
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
5 columns × 4 courses, 10 cut pieces of 18

Cuts (mm)

End A cut (to finished (tile) face of wall_e): 7
End B cut (to finished (tile) face of wall_w): 337
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full
Door door_s jamb, A side: full
Door door_s jamb, B side: 408
Door door_s over head: 516


Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_s, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

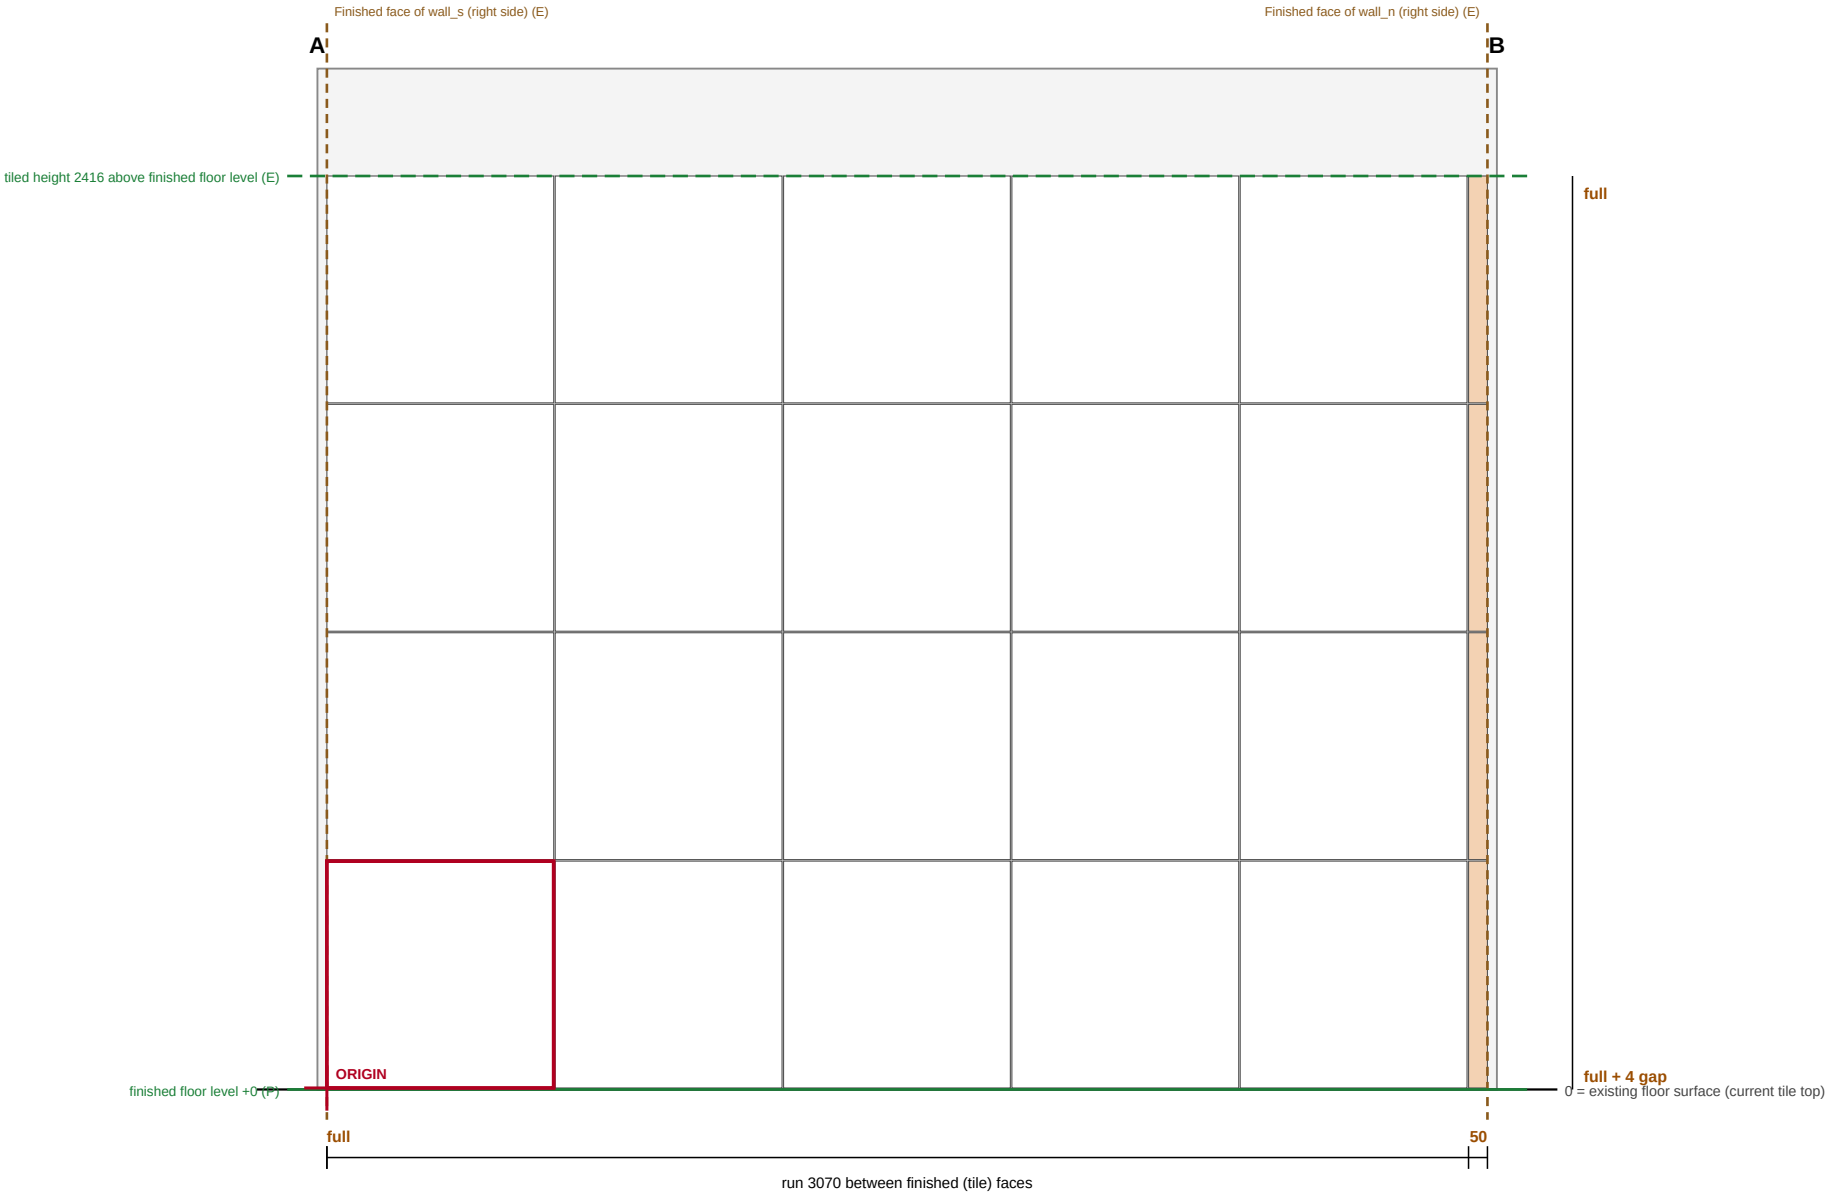

Tile set-out (proposed)

Tile: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end A finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
6 columns × 4 courses, 4 cut pieces of 24

Cuts (mm)

End A cut (to finished (tile) face of wall_s): full
End B cut (to finished (tile) face of wall_n): 50
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full

Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_w, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

The room in 3D, stage by stage


Renders of the same model the drawings come from (shots/renovation-3d). For orientation only: dimension from the drawings.




Finished room, from above



Finished room, eye level

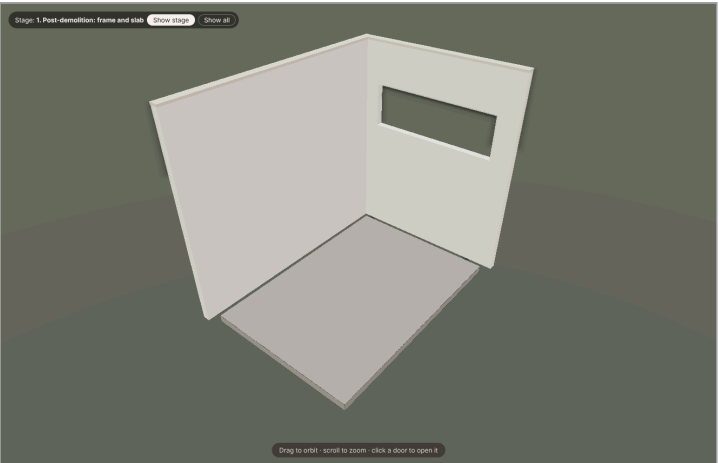

1. Post-demolition

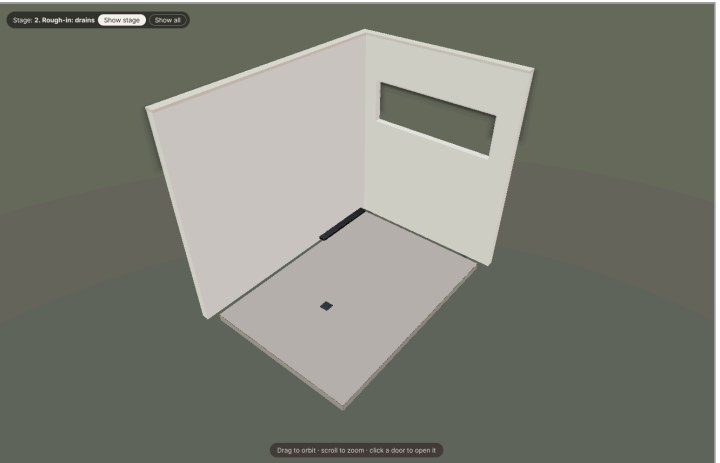

2–3. Frame and rough-in



Board and window



4. Waterproofing



5–8. Screed and tiles



9. Fit-out