

Bathroom Concept: trade set

Bathroom renovation · Bathroom (no site address recorded) · printed 2026-10-08 · 108 A3 pages

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



How to read these sheets

- Dimensions in millimetres. Every figure carries its status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown. Treat anything not SC or M as a figure to check on site.
- Elevations look at a wall from inside the room; end A is on the left. Wall fittings are set out from the wall's finished (tile) face: centreline along from the return wall's face at A, bottom above the finished floor.
- F1, F2... are the fixtures (see the fixture schedule); F11.2 is service point 2 of fixture 11. "?" means not known yet and never drawn.
- Scale 1:20 at A3 on the plans and elevations. Print at 100% ("actual size"), never "fit to page".

16 sections. Generated from the project model by npm run printables; the drawings are the same exports saved in the repository (shots/stage-pack, shots/sample-sheets).

Contents

Sheet	Page
Who needs what, open decisions, still to measure	2
Fixture schedule	3
A-01 floor plan	4
1. Post-demolition: frame and slab plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	5–11
2. Frame prep: board lined to the frame plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	12–18
3. Rough-in: drains and service points plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	19–27
4. Waterproofing: floor membrane only (stopgap) plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	28–35
5. Heating cable on the membrane plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	36–41
6. Screed and falls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	42–50
7. Tile adhesive, floor and walls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	51–59
8. Tiles laid, floor and walls plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	60–68
9. Fit-out: fixtures and their service points plan · elevation, window wall (north) · elevation, right wall (east) · elevation, door wall (south) · elevation, left wall (west) · specification	69–91
Floor tiling	92
Wall tiling window wall (north) · right wall (east) · door wall (south) · left wall (west)	93–96
Heating review	97–107
3D renders	108

Who needs what, and what is still open

Sheets by trade

Trade	Sheets
Demolition / builder	Post-demolition (p. 5–11); Frame prep (p. 12–18); A-01 (p. 4)
Plumber	Rough-in (p. 19–27); Screed and falls (p. 42–50); Fit-out (p. 69–91); Fixture schedule (p. 3)
Electrician	Rough-in (p. 19–27); Heating cable (p. 36–41); Heating review (p. 97–107); Fixture schedule (p. 3)
Waterproofofer	Waterproofing (p. 28–35); Screed and falls (p. 42–50)
Tiler	Screed and falls (p. 42–50); Tile adhesive (p. 51–59); Tiles laid (p. 60–68); Floor tiling (p. 92); Wall tiling (p. 93–96)
Glazier / fit-out	Fit-out (p. 69–91); Fixture schedule (p. 3)

Open owner decisions

- Shower lower bracket height: 1200 mm above the finished floor is in use (P, owner proposal, not confirmed); the G1/2 inlet follows at 1700 mm.
- Heating cable under the toilet and the vanity: keep-outs not decided; the proposed route runs under both.
- Wall membrane extent: whole window wall, side walls to 100 mm past the screen line, 150 mm strip elsewhere (proposed). Wall layers are whole-wall in the model, so it is a note, not drawn (#88).
- Which face the screen's 1200 mm (and the other 'from the window wall' figures) is measured to: drawings hold them from the window wall's existing surface.
- Shower mixer and towel rails along the left wall: places not chosen; drawn where the plan has them, tagged E.

Measure first

- Before strip-out: present positions of the vanity's waste and water points, the shaving cabinet and the GPO, so the 300 mm moves can be set out.
- After demolition: slab level (about 120 mm below the current tile, E), the frame faces of each wall, and the wall height from the slab.
- Once the frame is confirmed, the finished faces follow; every set-out on these sheets is read off those faces.


Still to measure or confirm (21)

- Bath set K1132-##-150+KDPP32**: Plate centre height (owner proposed 750 mm, 7 Oct 2026; not surveyed) and position along the right wall (owner proposed 500 mm from the window wall); in-wall body inlet spacing and concealed depth are not on the set drawing. From: finished floor tiles, on the right-wall finished (tile) face once that face is surveyed; the window wall's finished face for the 500 mm.
- Shower Y1173-31-11-250**: Height of the lower bracket (owner proposed 1200 mm, 7 Oct 2026; not surveyed). The G1/2 inlet at the upper rose follows 500 mm higher. From: finished floor tiles, on the left-wall finished (tile) face once that face is surveyed.
- Shower Y1173-31-11-250**: Height of the slider/holder on the 981 mm rail (3D position is illustrative; sheet 106.4 mm is the holder's horizontal projection from the wall/mounting face, not a height). From: the rail's lower end, or a named point on the finished wall.
- Shower Y1173-31-11-250**: Position of the 3F handpiece on the rail (3D position is illustrative; drawing B sizes 246.3 × Ø105 × 45.4 mm are published). From: the rail's lower end, or a named point on the finished wall.
- Towel rail VS900HBN (both)**: Height of the rail foot. From: finished floor tiles, on the left-wall finished (tile) face (owner proposed 750 mm; not surveyed).
- Towel rail VS900HBN (both)**: Bracket end offsets along the 900 mm tube (60 mm, inferred from (900 – 780) / 2, not a sheet dimension). From: each end of the 900 mm tube, to the fixing centre (sheet publishes 780 mm centres only).
- Ahrok SDP-40BN bath waste**: Visible dome diameter and dome height above the waste flange (unsourced; drawn stand-ins live only on the kind size). From: the bath floor / waste flange of SB184-1000GW (no manufacturer sheet; carton names the 40 mm connection only).
- Ahrok SDP-40BN bath waste**: Fit of the 40 mm connection in the bath's Ø50 waste hole (owner, 7 Oct 2026: ordered with the bath, so expected to match; check on delivery). From: the Ø50 waste on the bath bisector, 520 mm from the right-angle corner.
- Ahrok SDP-40BN bath waste**: Elevation of the waste dome (unsourced; drawn stand-in 590 mm above finished floor lives only on the kind). That figure conflicts with the bath's published 630 mm overall height and 550 mm inside depth. From: the bath floor / waste flange; finished floor does not exist yet.
- Basin mixer K1110-31**: Deck height above the finished floor (unsourced; drawn stand-in 850 mm lives only on the kind, taken from the vanity's measured overall height 850 mm; not an owner proposal and not a finished-floor tape). From: finished floor tiles once they exist, to the vanity deck / mixer flange.
- OJ MWD5-1999-CBP3 thermostat**: Cover-plate width, height and projection of this exact CBP3 cover (unsourced; drawn stand-ins live only on the kind size). From: the CBP3 cover itself (brochure lists OxD5 / MxD5 / MxD5-UA sizes without naming CBP3).
- OJ MWD5-1999-CBP3 thermostat**: Mounting height to the plate. From: hallway finished floor, next to the light switch (owner: 1000 mm, 7 Oct 2026; not surveyed).
- SCK0765L in-screed heating cable**: Keep-out for the toilet (not on the carton; route is unconstrained there). From: finished pan footprint, once the installer says whether cable stops short of it.
- SCK0765L in-screed heating cable**: Keep-out for the vanity (not on the carton; route is unconstrained there). From: finished vanity footprint, once the installer says whether cable stops short of it.
- SCK0765L in-screed heating cable**: Cable centre height in the screed (not on the carton). From: bottom face of the tiler's screed (top of the membrane / subfloor stack), not the underside of the tile unless that is the screed top.
- SCK0765L in-screed heating cable**: Cover over the cable, minimum bend radius, and whether the Coldbuster in-screed manual (July 2023, taken as this cable's: it does not name SCK0765L) applies; the floor sensor's conduit position (manual: about 300 mm into the heated area, between runs). From: Coldbuster, for this exact cable; the electrician for the sensor conduit.
- Shower mixer K1130-31**: Plate centre height (owner proposed 1000 mm, 7 Oct 2026; not surveyed), position along the shower wall (not chosen; drawn 850 mm from the window wall) and body depth behind the tile. From: finished floor tiles, on the left-wall finished (tile) face.
- Toilet Cygnet Over-height with SpaLet**: S-trap set-out for the new waste (sheet: 140–260 mm, 260 nominal) and the cold water (180 mm high, 180 mm left of centre) and SpaLet power (300 mm high, 330 mm left of centre) points at the moved position. From: the finished wall behind the pan and the pan centreline, facing the toilet; finished floor for heights.
- Shower screen (Future Glass fixed panel)**: Which face the 1200 mm from the window wall is measured to. From: the window wall's finished (tile) face or its frame, to the panel's centreline.
- Bath SB184-1000GW**: Check the delivered bath: 1000 mm wall sides, 1090 mm corner-to-front, 630 mm height, waste 520 mm from the corner. From: the two wall sides and the right-angle corner (sheet notes slight variations).
- Room walls**: Survey finished wall faces (or confirm the frame after strip-out) so the wall fittings' set-out and installed heights read off measured faces, not estimated ones. From: each room-facing wall: existing surface is measured; finished face is still estimated from the frame plus proposed layers.

Fixture schedule

From the project model. Set-out along a wall is read from the return wall's finished face; heights are above the finished floor (flat target 0 P = the current tile level). Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown.

No.	Item	Product	Selection	Envelope W × D × H	Set-out	Height	Service points (up above finished floor; across the fixture's centreline facing it, left –; out from the wall face)
F1	Corner bath	Enflair · Angie Corner 1000mm Bath, GW · SB184-1000GW	purchased	1018 × 1018 × 630	not set out from a wall: position as drawn on the plan	stands on the finished floor	none recorded
F2	Bath mixer and spout	Enflair · Profile III 150mm basin/bath wall mixer set with rectangular plate · K1132-##-150+KDPP32	purchased	200 × 162 × 117	right wall (east): back on the finished face, centreline 525 P along from Finished face of the window wall (north)	bottom 665.5 P above the finished floor (lever end (envelope bottom); plate centre is the owner's proposed 750 mm)	water: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing), 750 P up, 60 P across, 0 P out
F3	Bath waste	Ahrok · Dome Pop Short Bath Waste 40mm, with pull out basket · SDP-40BN	purchased	70 × 70 × 20	in F1 Corner bath: 141.3 across, 367.7 from its back (DER)	? (no recorded height)	none recorded
F4	Basin mixer	Enflair · Profile III petite basin mixer · K1110-31	purchased	48 × 145 × 148	in F9 Vanity: 0 across, 62.5 from its back (DER)	? (no recorded height)	none recorded
F5	Shower system	Profile round twin shower system with adjustable rail · Y1173-31-11-250	purchased	250 × 552 × 981	left wall (west): back on the finished face, centreline 2445 P along from Finished face of the door wall (south)	bottom 1129.7 P above the finished floor (rail foot, 70.3 mm below the lower bracket (derived); lower bracket is the owner's proposed 1200 mm)	water: G1/2 inlet at the upper wall rose (on the rail centreline), 1700 P up, 0 P across, 0 P out
F6	Shower mixer	Enflair · Profile III shower/bath wall mixer · K1130-31	purchased	65 × 69.5 × 117	left wall (west): back on the finished face, centreline 2195 E along from Finished face of the door wall (south)	bottom 915.5 E above the finished floor (lever end (envelope bottom); plate centre is the owner's proposed 1000 mm)	water: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived), 1000 P up, 0 P across, 0 P out
F7	Towel rail	Thermorail · VS900HBN · VS900HBN	purchased	142 × 100 × 900	left wall (west): back on the finished face, centreline 1220 E along from Finished face of the door wall (south)	bottom 750 E above the finished floor	none recorded
F8	Towel rail	Thermorail · VS900HBN · VS900HBN	purchased	142 × 100 × 900	left wall (west): back on the finished face, centreline 1470 E along from Finished face of the door wall (south)	bottom 750 E above the finished floor	none recorded
F9	Vanity	Gloss white floor-standing vanity, ceramic top with integrated basin (reused)	reused	910 × 465 × 850	right wall (east): back on the finished face, centreline 1725 P along from Finished face of the window wall (north)	stands on the finished floor	none recorded
F10	Shaving cabinet	Two-door mirror shaving cabinet (reused)	reused	750 × 160 × 620	right wall (east): back on the finished face, centreline 1725 P along from Finished face of the window wall (north)	bottom 1200 P above the finished floor	none recorded
F11	Toilet	American Standard · Cygnet Hygiene Rim Over-height Square close coupled back-to-wall toilet suite, bottom inlet, with SpaLet E-bidet seat · 9509830	reused	381 × 700 × 857	right wall (east): back on the finished face, centreline 2625 P along from Finished face of the window wall (north)	stands on the finished floor	waste: Pan waste, S-trap (floor), 0 PUB across, 140–260 PUB out water: Cold water point (stop tap), 180 PUB up, -180 PUB across, 0 PUB out power: SpaLet seat power point, 300 PUB up, -330 PUB across, 0 PUB out
F12	Fixed glass screen	not recorded	unknown	900 × 10 × 2000	not set out from a wall: position as drawn on the plan	stands on the finished floor	none recorded

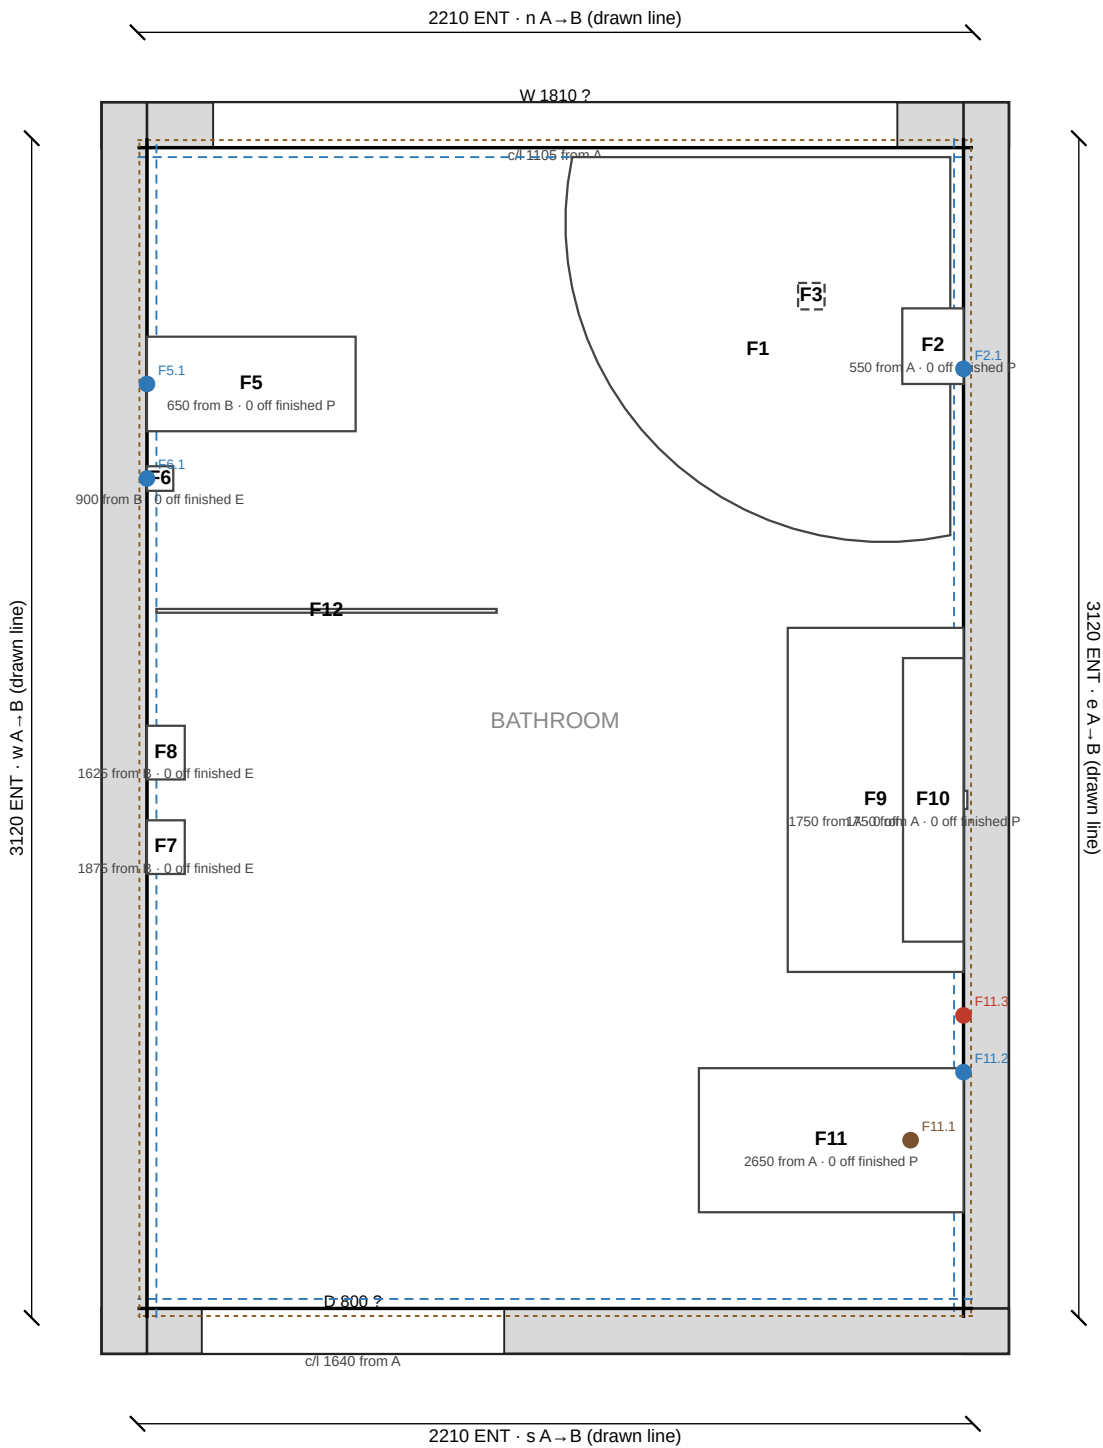

Legend

Status: SC site-confirmed · M measured · PUB published · P proposed
E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default · ? unknown
Faces: blue dashed existing · brown dotted frame · black finished
Points: brown waste · blue water · red power. Grey = wall as built.

Wall build-up (mm from drawn line, toward the side)

n right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) 10
e right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10
s right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10
w right: existing 50 M · frame 5 E · Villaboard 6 mm 6 / Tile adhesive (tiler's) 4 / 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain) 10

Rough-in (mm out from face · along from A · up from FFL)

F1 Corner bath (not set out)
F2 Bath mixer and spout
F2.1 Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): frame 20 · board 14 · fin 0 · A 610 · up 750 P
F3 Bath waste (not set out)
F4 Basin mixer (not set out)
F5 Shower system
F5.1 G1/2 inlet at the upper wall rose (on the rail centreline): frame 20 · board 14 · fin 0 · A 2470 · up 1700 P
F6 Shower mixer
F6.1 Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): frame 20 · board 14 · fin 0 · A 2220 · up 1000 P
F7 Towel rail
F8 Towel rail
F9 Vanity
F10 Shaving cabinet
F11 Toilet
F11.1 Pan waste, S-trap (floor): frame 160–280 · board 154–274 · fin 140–260 · A 2650 · up ? PUB
F11.2 Cold water point (stop tap): frame 20 · board 14 · fin 0 · A 2470 · up 180 PUB
... 2 more: see get_rough_in / check_sheets

Unresolved (21)

- Bathroom floor tiling: Grate outlines come from the linked drain briefs. Confirm clearance, edge joints and cut shape on site.
- Bathroom floor tiling: east cut is 32 mm: narrow piece for tiler review.
- Bathroom floor tiling: Tiles cross floor-plane boundaries. Confirm slope-break cuts and movement joints with the tiler.
- Bathroom floor tiling: Review fields: door door_s transition: finished face or real clear width unresolved; fall plane Shower: slope/levels unresolved; fall plane Beside the shower (under the bath): slope/levels unresolved; fall plane Dry area: slope/levels unresolved.
- Room "Bathroom" floor: Unknown: Tiler's screed (heating cable inside) thickness. Read down from the finished-level target, only tiler's screed (heating cable inside) top stay unresolved; Tiler's screed (heating cable inside) + Tiler's adhesive fill 108.5 mm together.
- Room "Bathroom" drainage: Plane "Shower" has no derived heights: unknown Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level.
- Room "Bathroom" drainage: Plane "Beside the shower (under the bath)" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.
- Room "Bathroom" drainage: Plane "Dry area" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.
- bath_mixer, shower_system, shower_mixer, towel_rail, towel_rail_2, shaving_cabinet: Falls unresolved at this point: height read from the flat finished-floor target.
- Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- ... 11 more: see get_rough_in / check_sheets

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)


Sheet A-01: Floor plan, faces and rough-in

Scale 1:20 @ A3 · PREVIEW, not issued

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

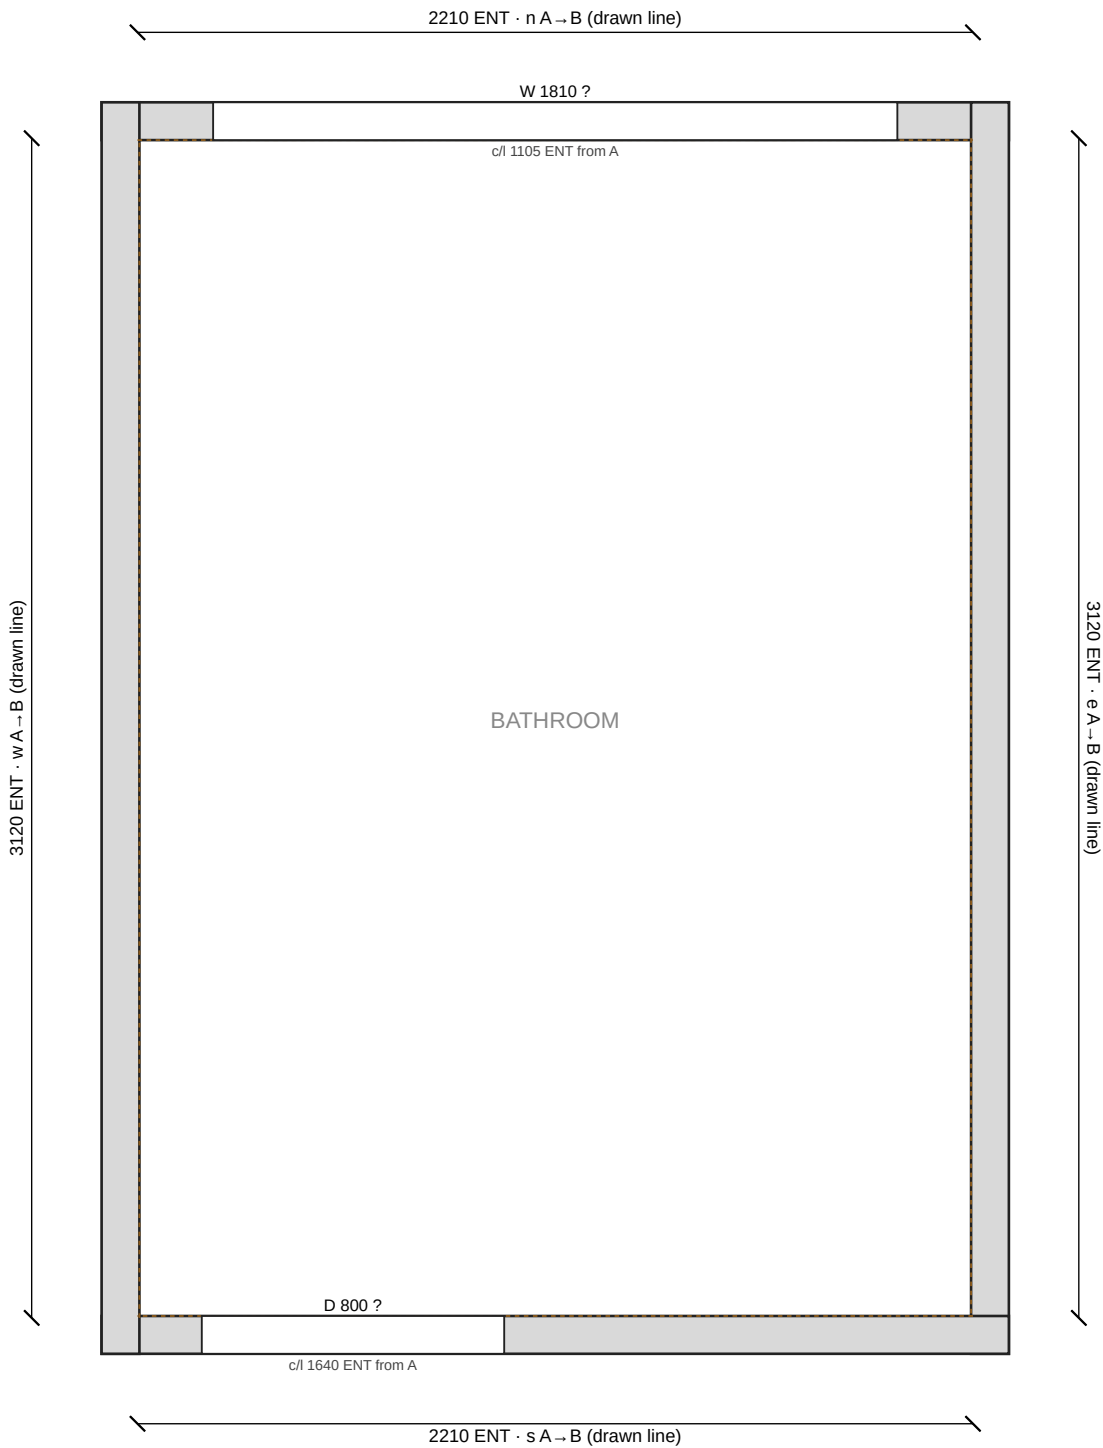

0 1 m

Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

Stage: 1. Post-demolition: frame and slab

Shows 12 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall e right: frame face: frame face position 5 E
Wall s right: frame face: frame face position 5 E
Wall w right: frame face: frame face position 5 E

Floor (mm above datum)


Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E

Unresolved in this view (0)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 1. Post-demolition: frame and slab
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

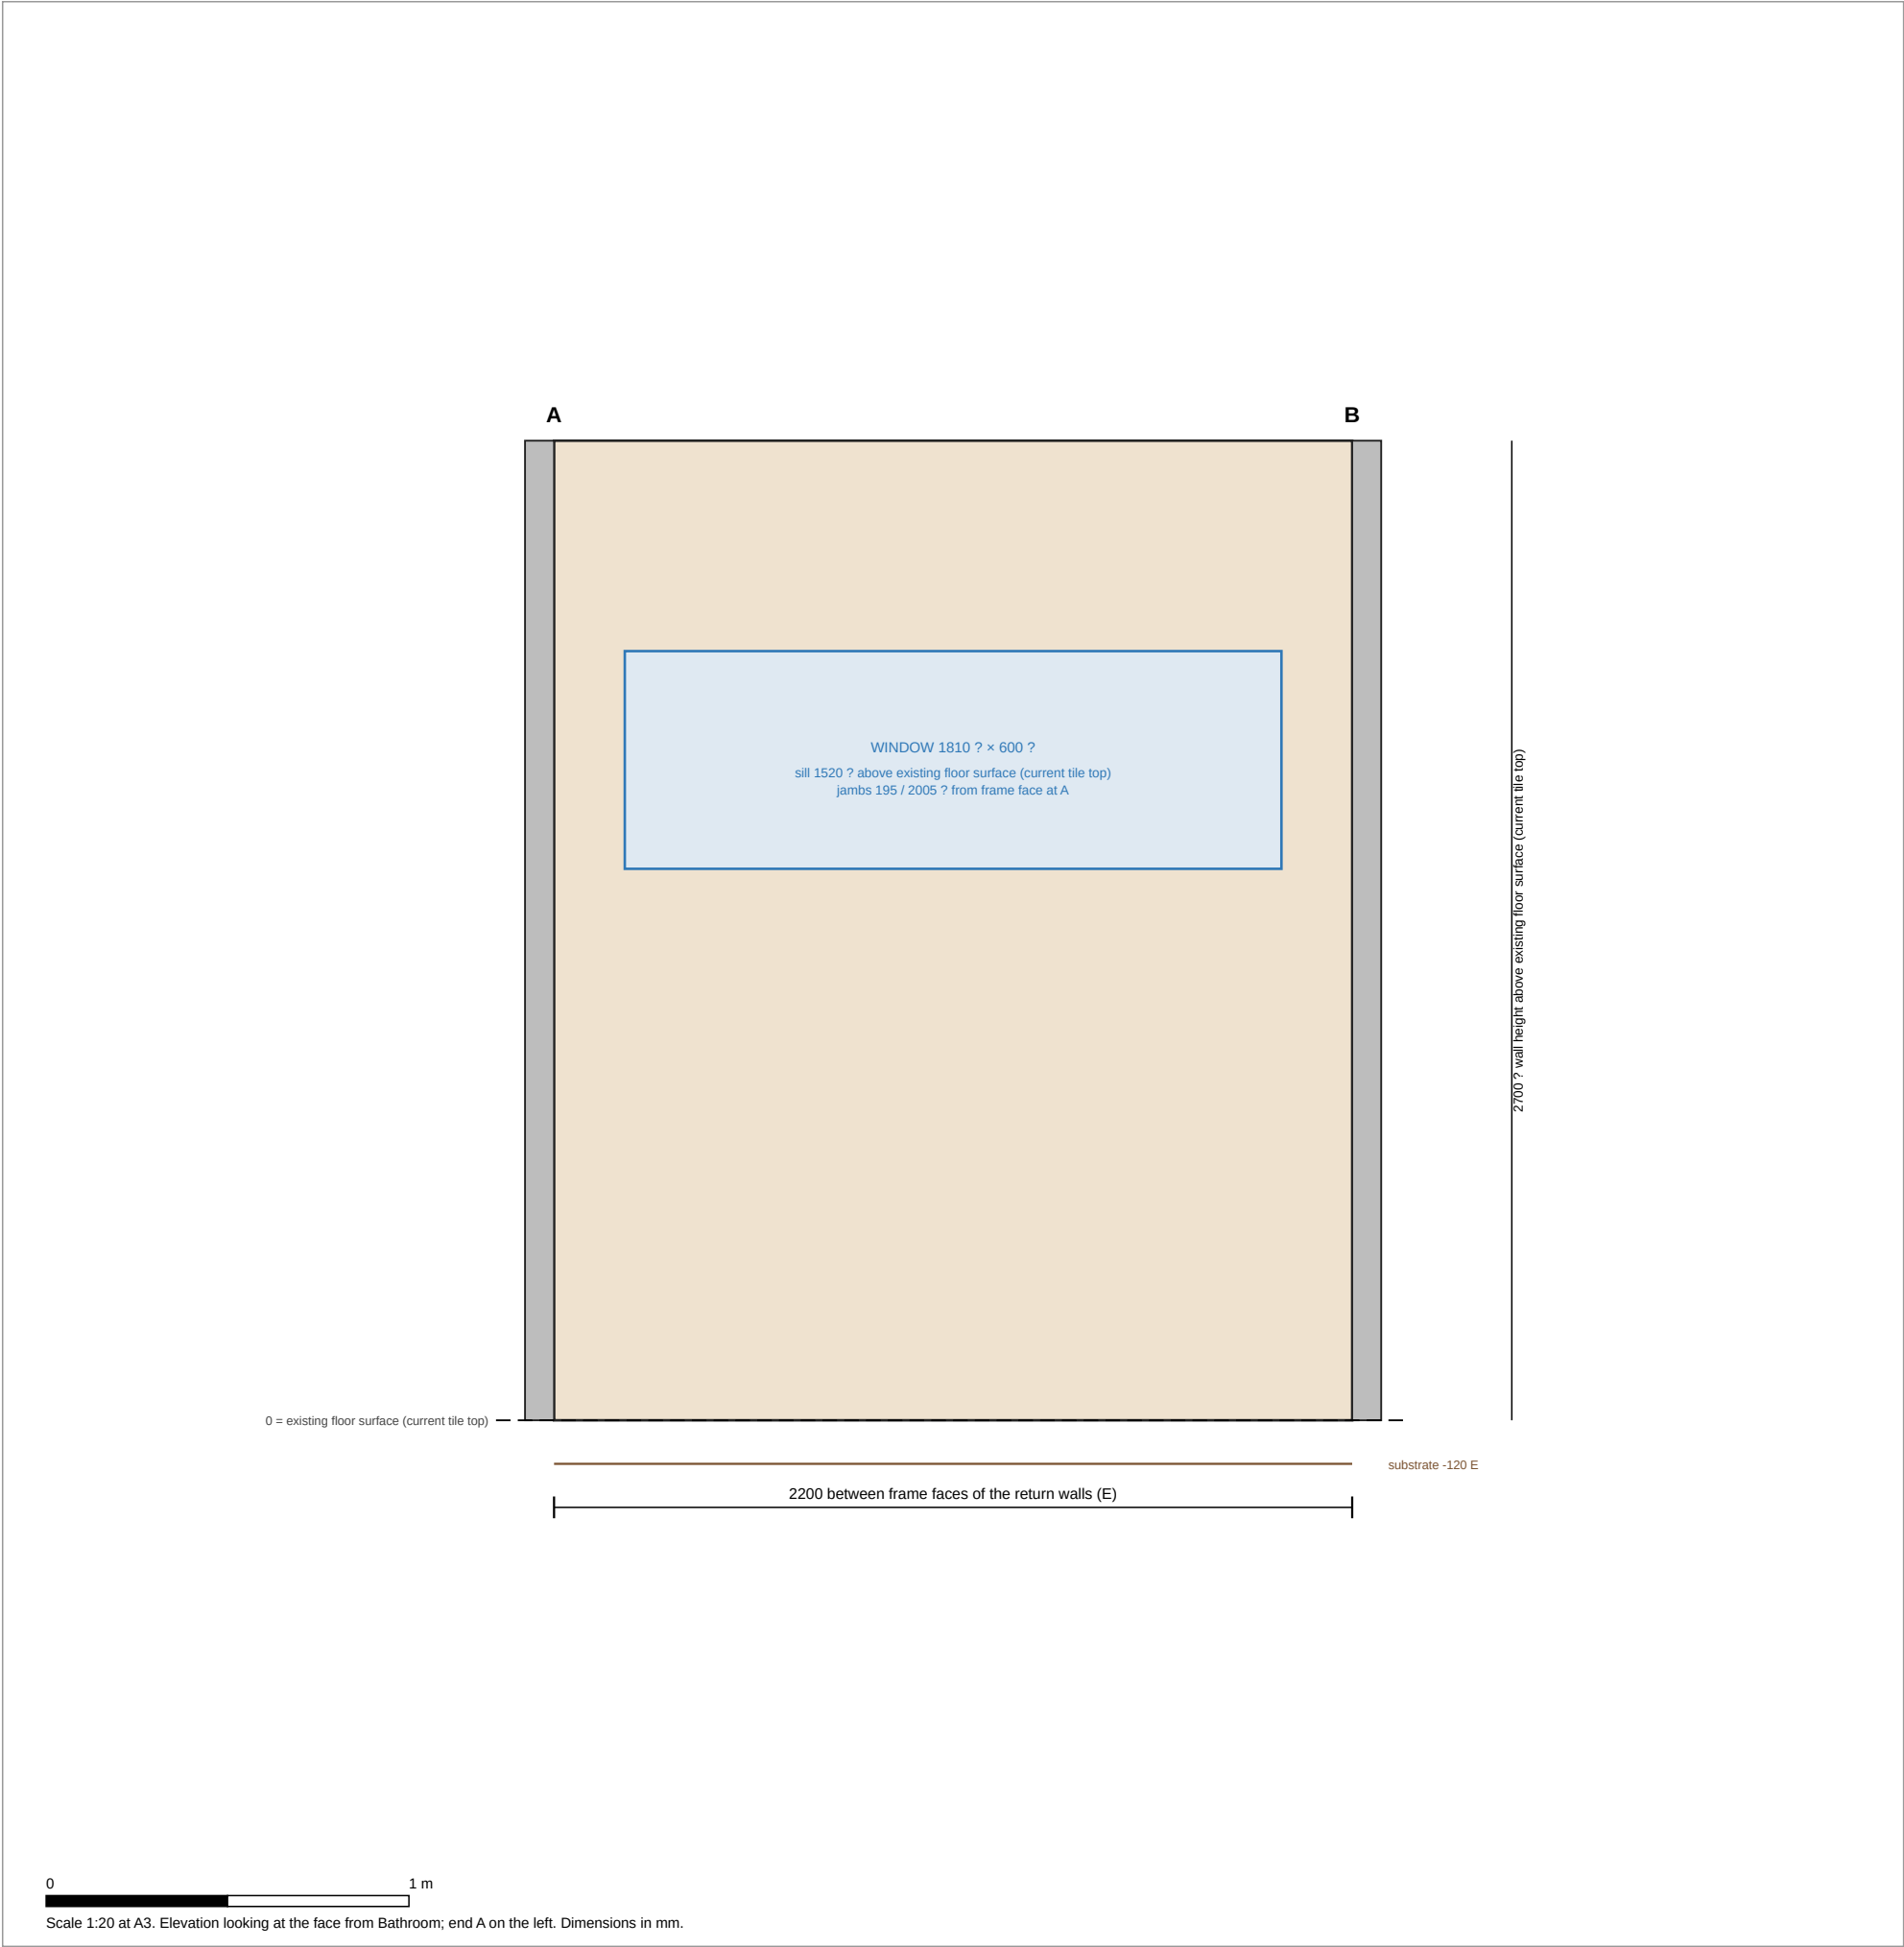

Stage: 1. Post-demolition: frame and slab

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_w (right side) at 5 E along the drawn line.
End B: Frame face of wall_e (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 1. Post-demolition: frame and slab · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 1. Post-demolition: frame and slab


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_n (right side) at 5 E along the drawn line.
End B: Frame face of wall_s (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

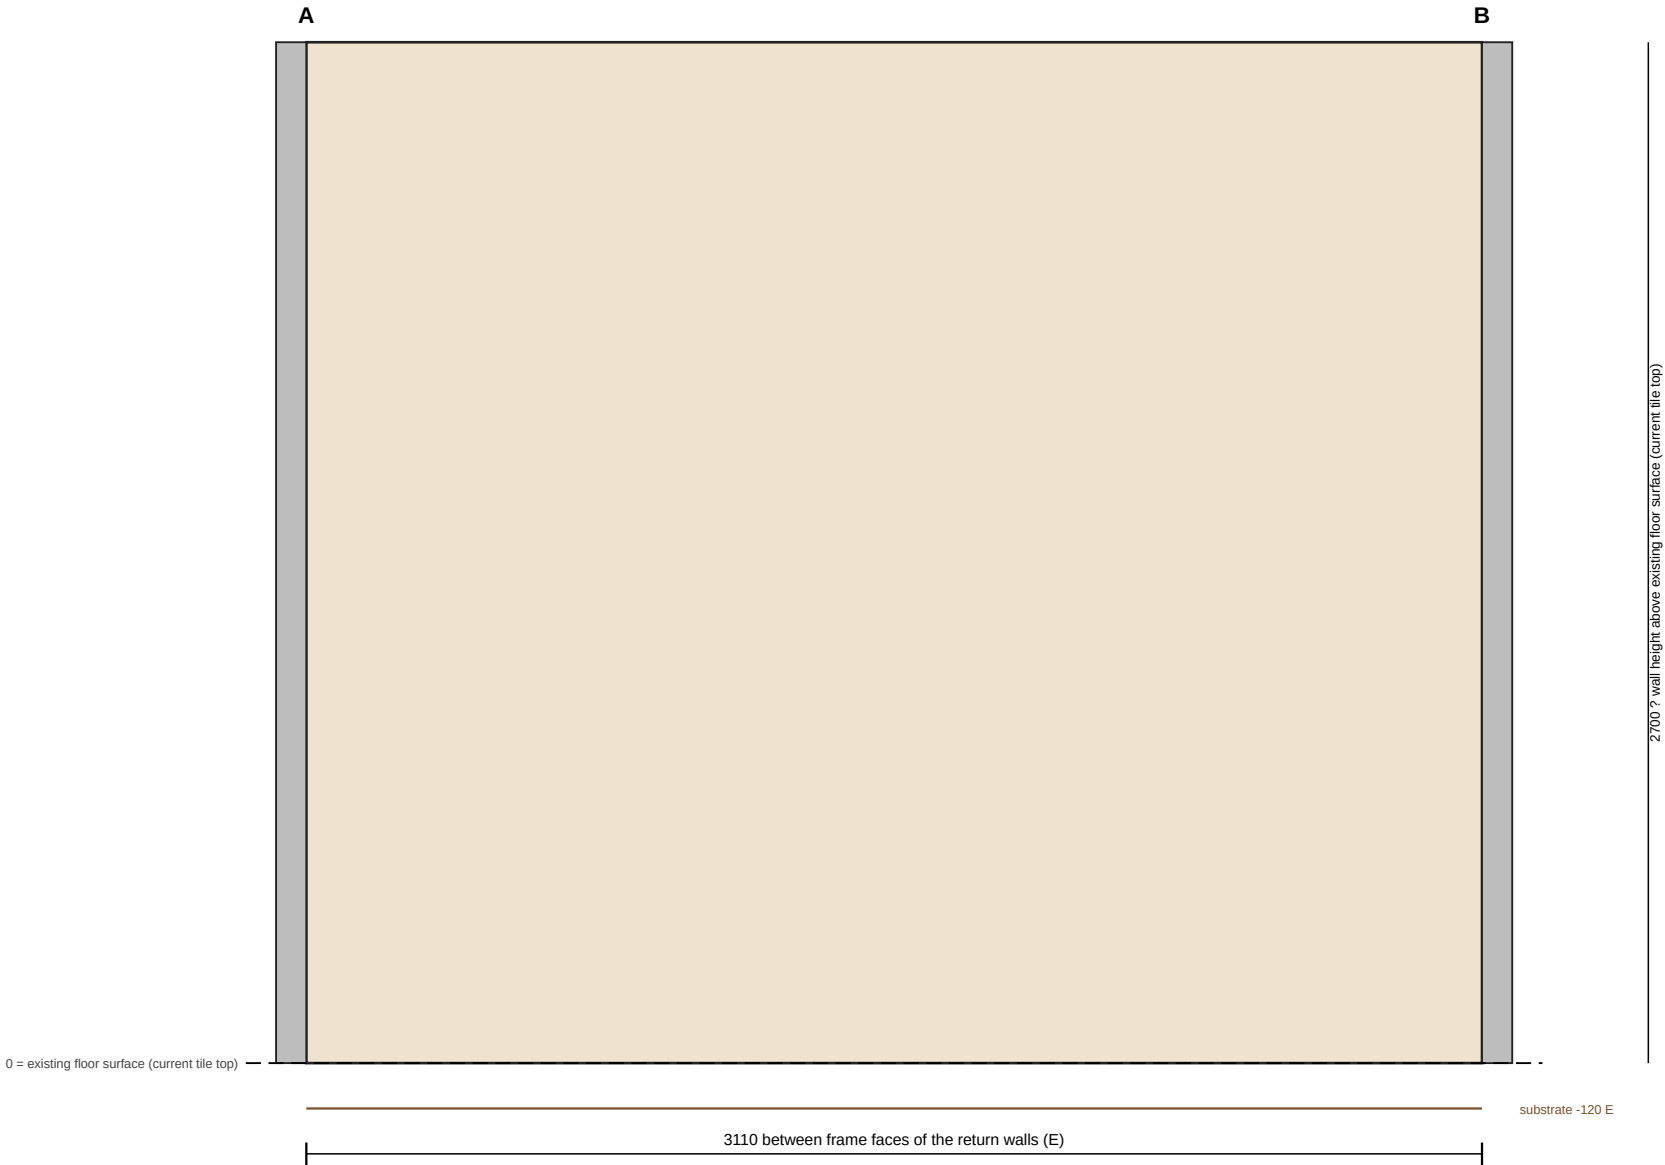

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Stage: 1. Post-demolition: frame and slab

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_e (right side) at 5 E along the drawn line.
End B: Frame face of wall_w (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 1. Post-demolition: frame and slab


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_s (right side) at 5 E along the drawn line.
End B: Frame face of wall_n (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

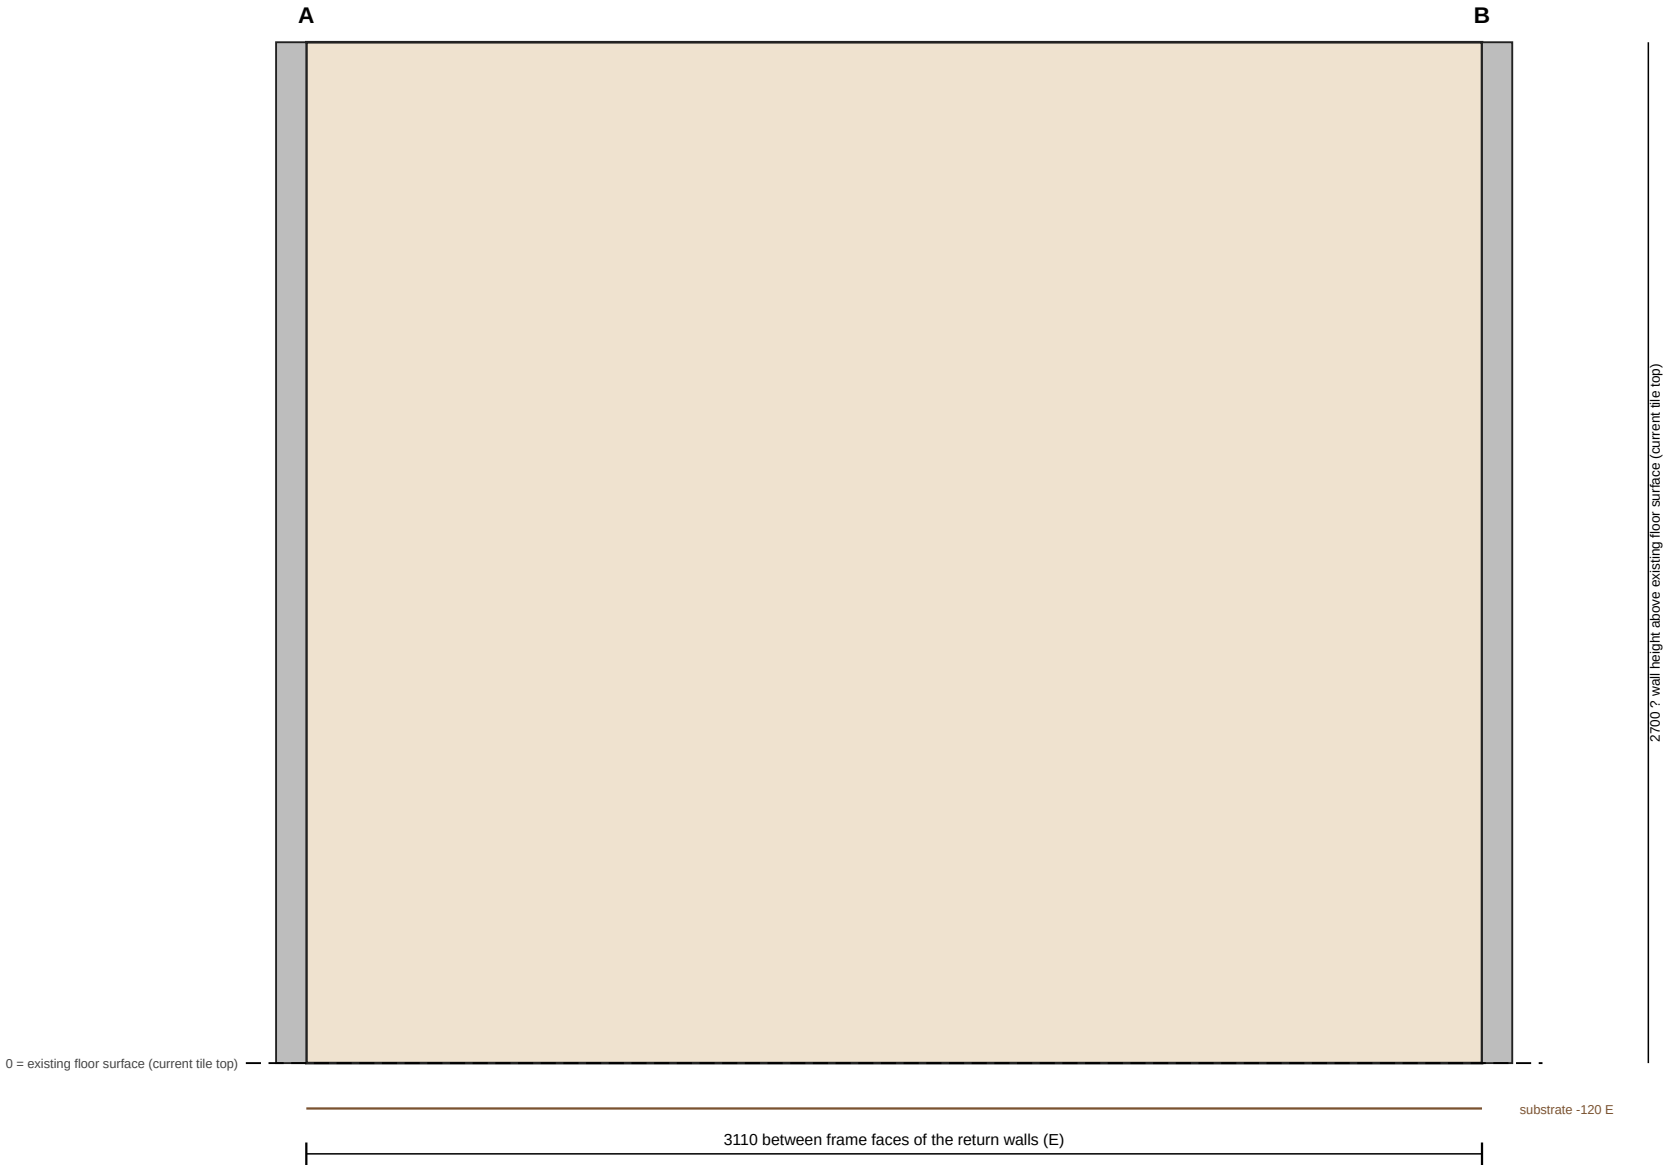

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 1. Post-demolition: frame and slab · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 1. Post-demolition: frame and slab

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01


PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 12 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall frame faces (after strip-out)						
Wall n right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_n, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall e right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_e, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall s right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_s, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall w right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_w, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	

Element	Property	Value	Status	Measured from	Source	Missing
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		

Unresolved in this view (0)

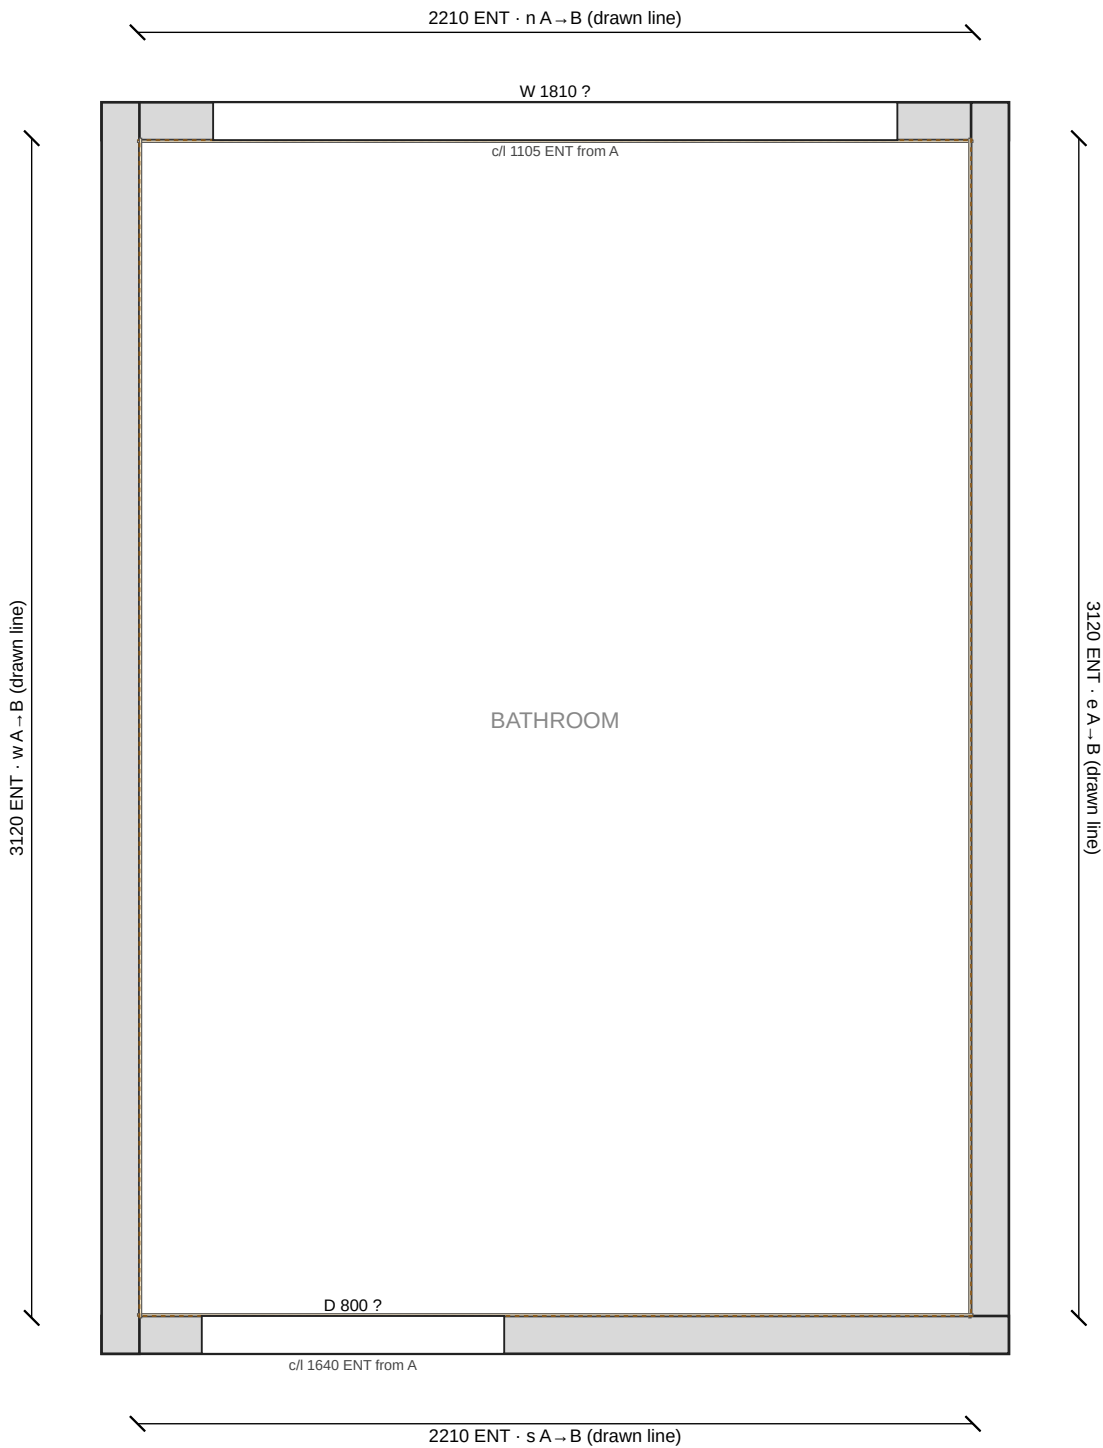

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

Stage: 2. Frame prep: board lined to the frame

Shows 16 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: frame face: frame face position 5 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: frame face: frame face position 5 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: frame face: frame face position 5 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)


Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E

Unresolved in this view (0)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 2. Frame prep: board lined to the frame
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

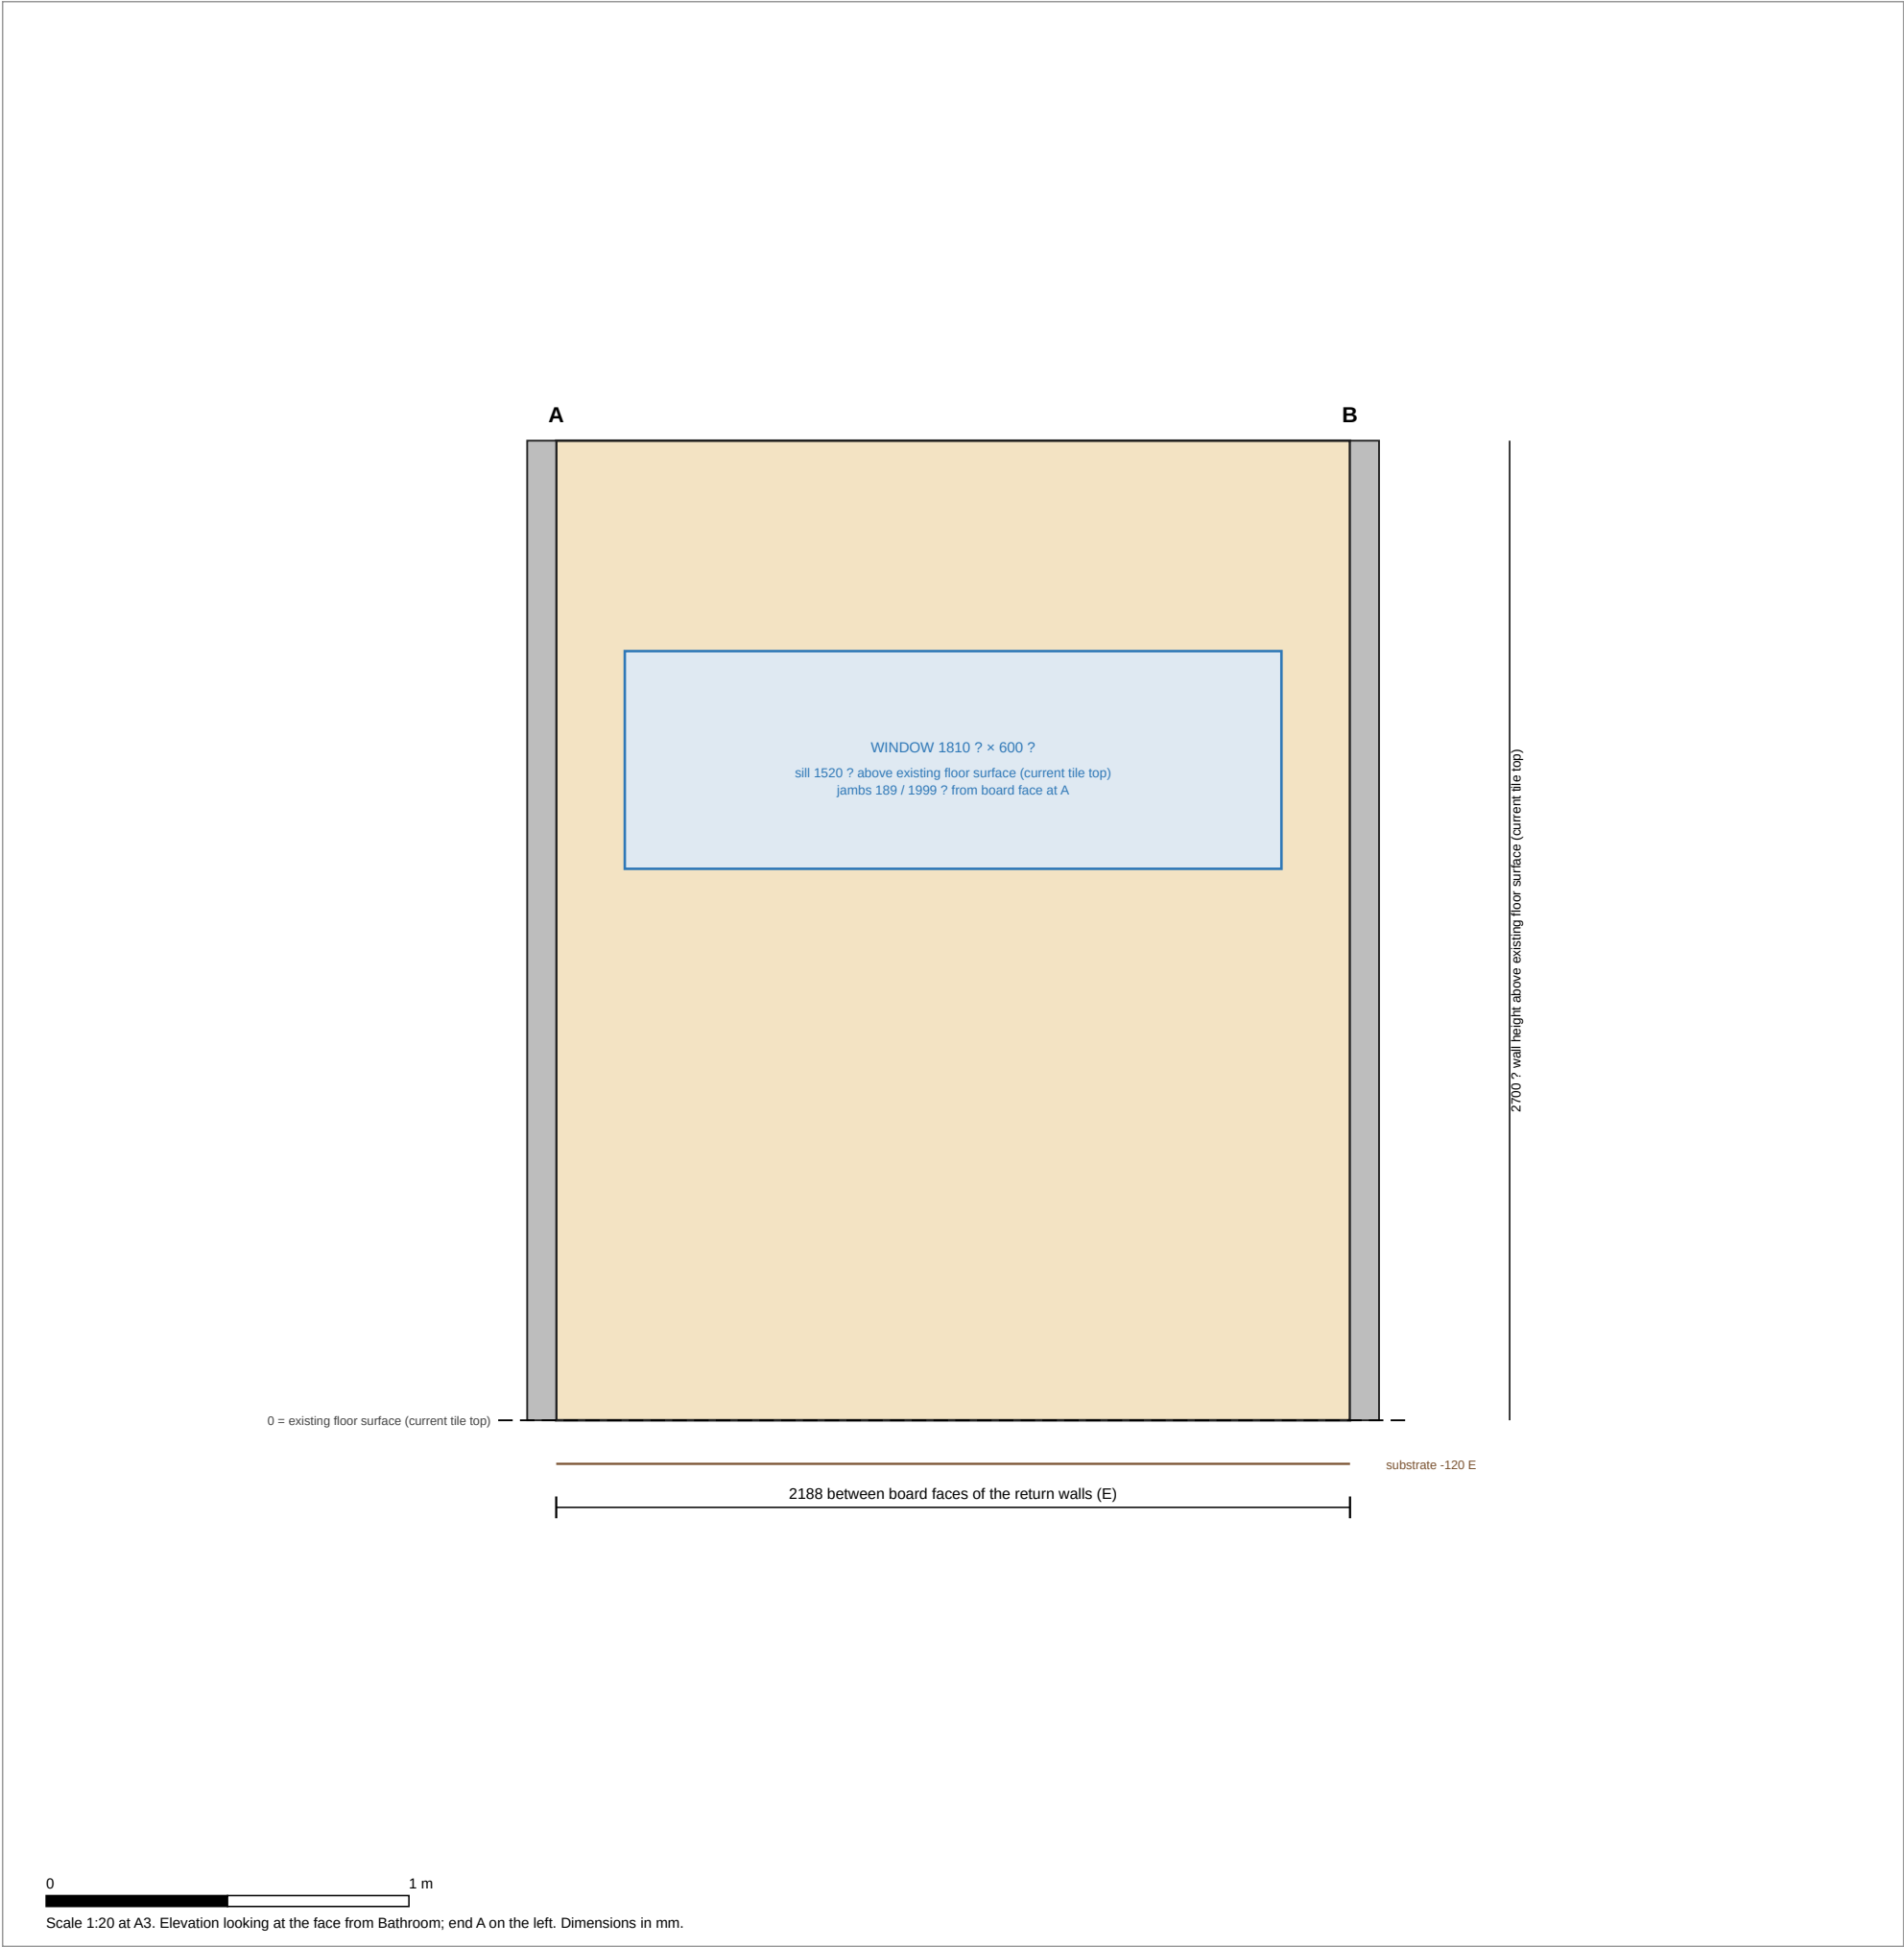

0 1 m

Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Stage: 2. Frame prep: board lined to the frame

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.

Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.

Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.

End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.

End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 2. Frame prep: board lined to the frame · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 2. Frame prep: board lined to the frame


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

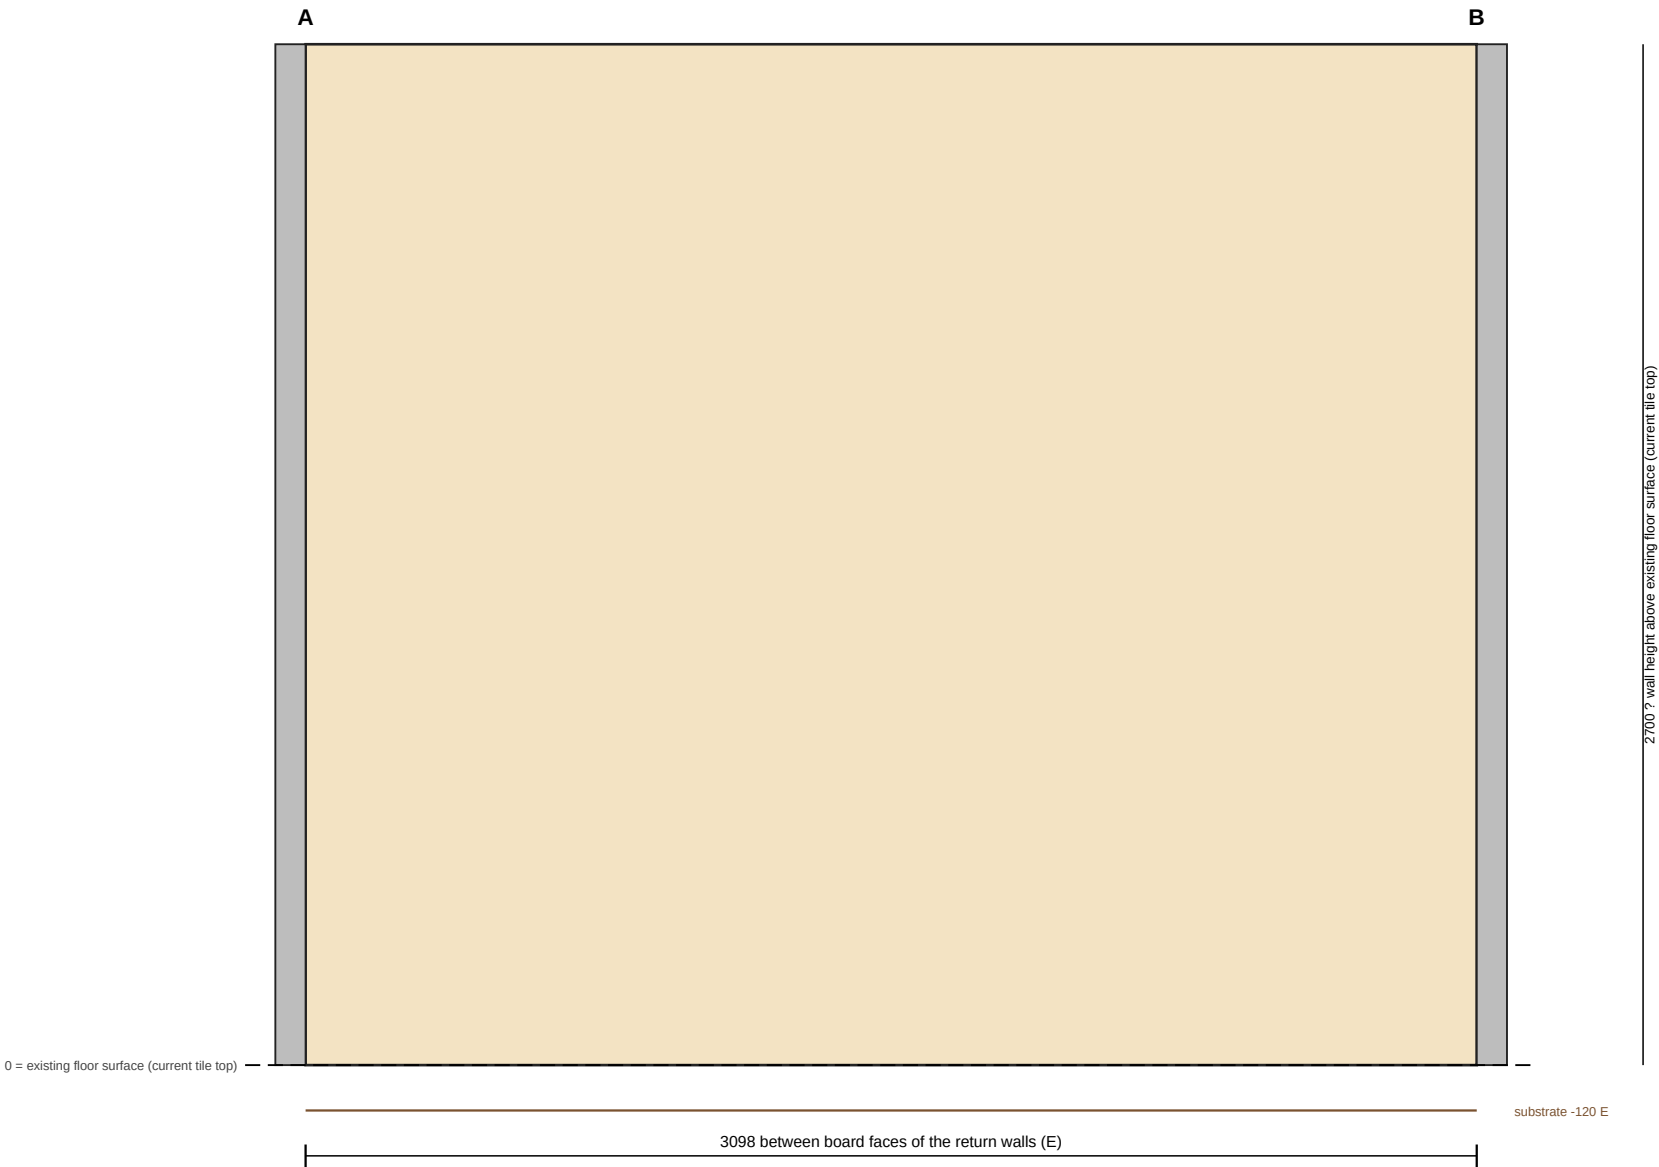

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Stage: 2. Frame prep: board lined to the frame

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 2. Frame prep: board lined to the frame


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

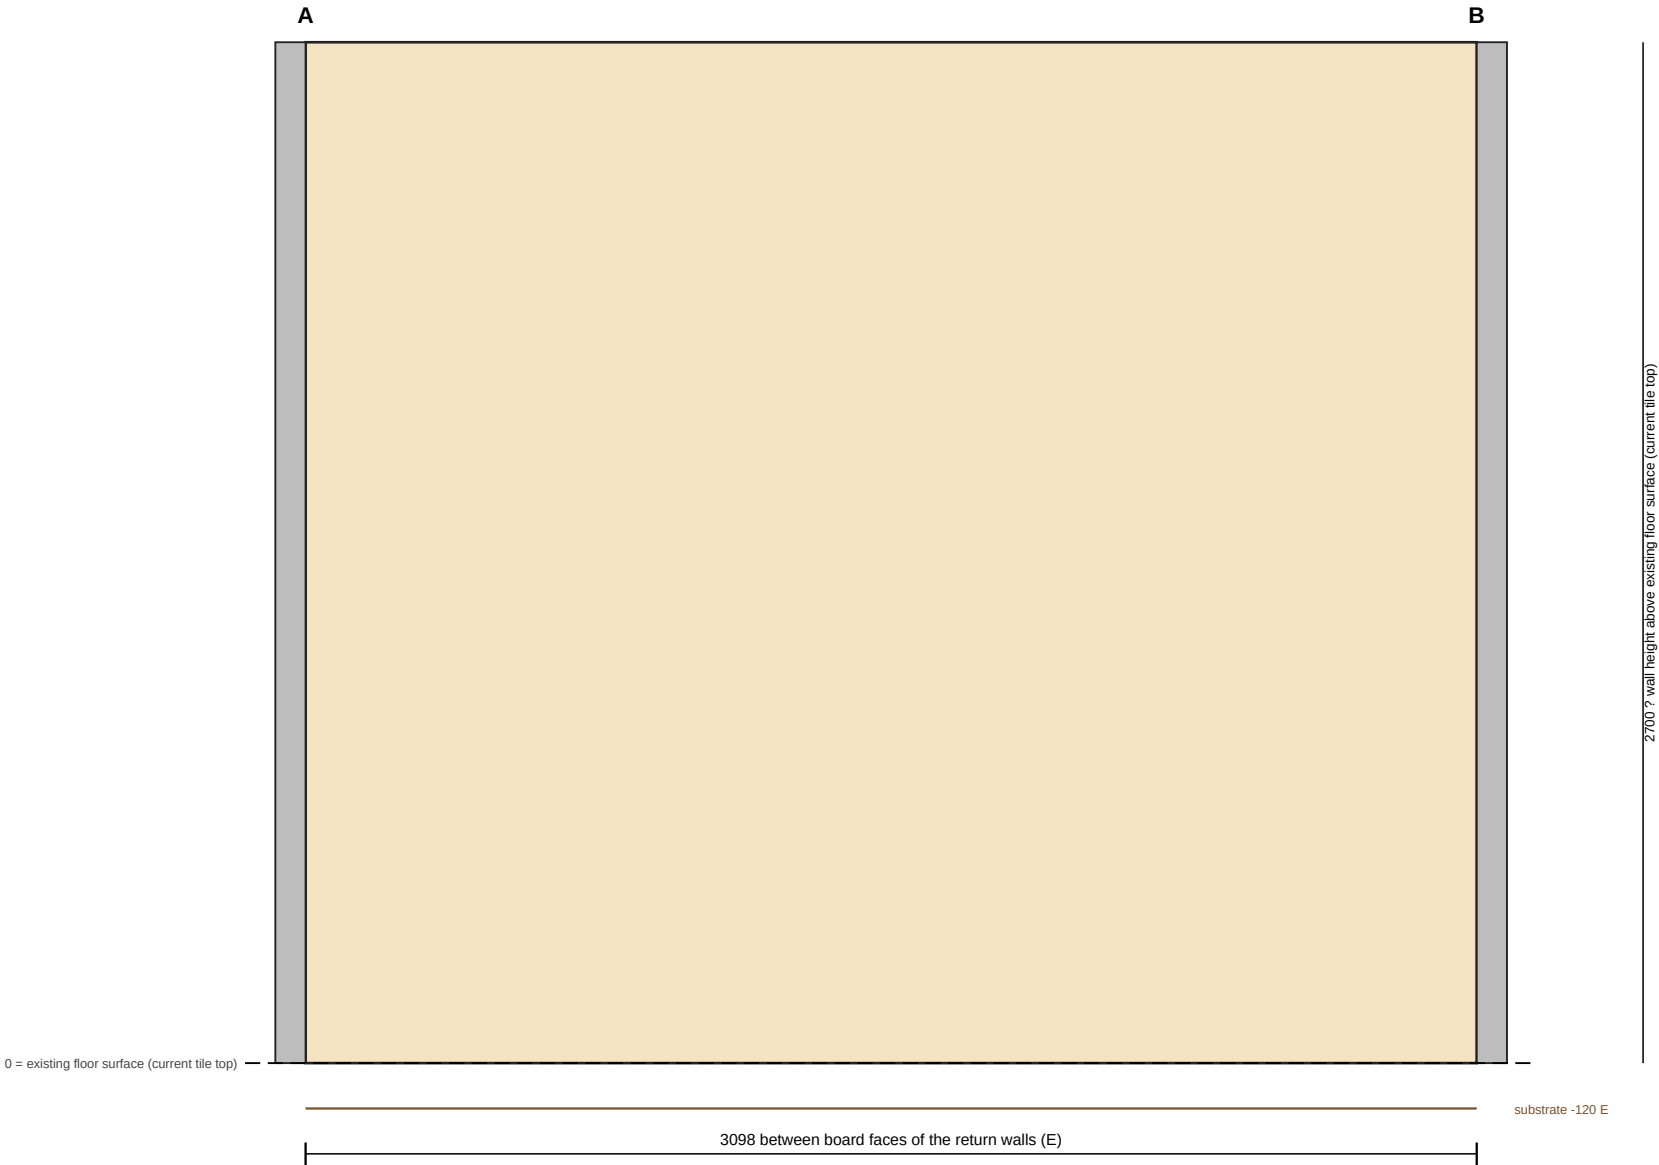

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 2. Frame prep: board lined to the frame · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 2. Frame prep: board lined to the frame

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01


PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 16 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall frame faces (after strip-out)						
Wall n right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_n, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall e right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_e, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall s right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_s, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall w right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_w, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall board (e.g. Villaboard)						
Wall n right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_n, toward right side		
Wall e right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_e, toward right side		
Wall s right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_s, toward right side		
Wall w right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	

Element	Property	Value	Status	Measured from	Source	Missing
	outer face position (mm)	11	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		

Unresolved in this view (0)

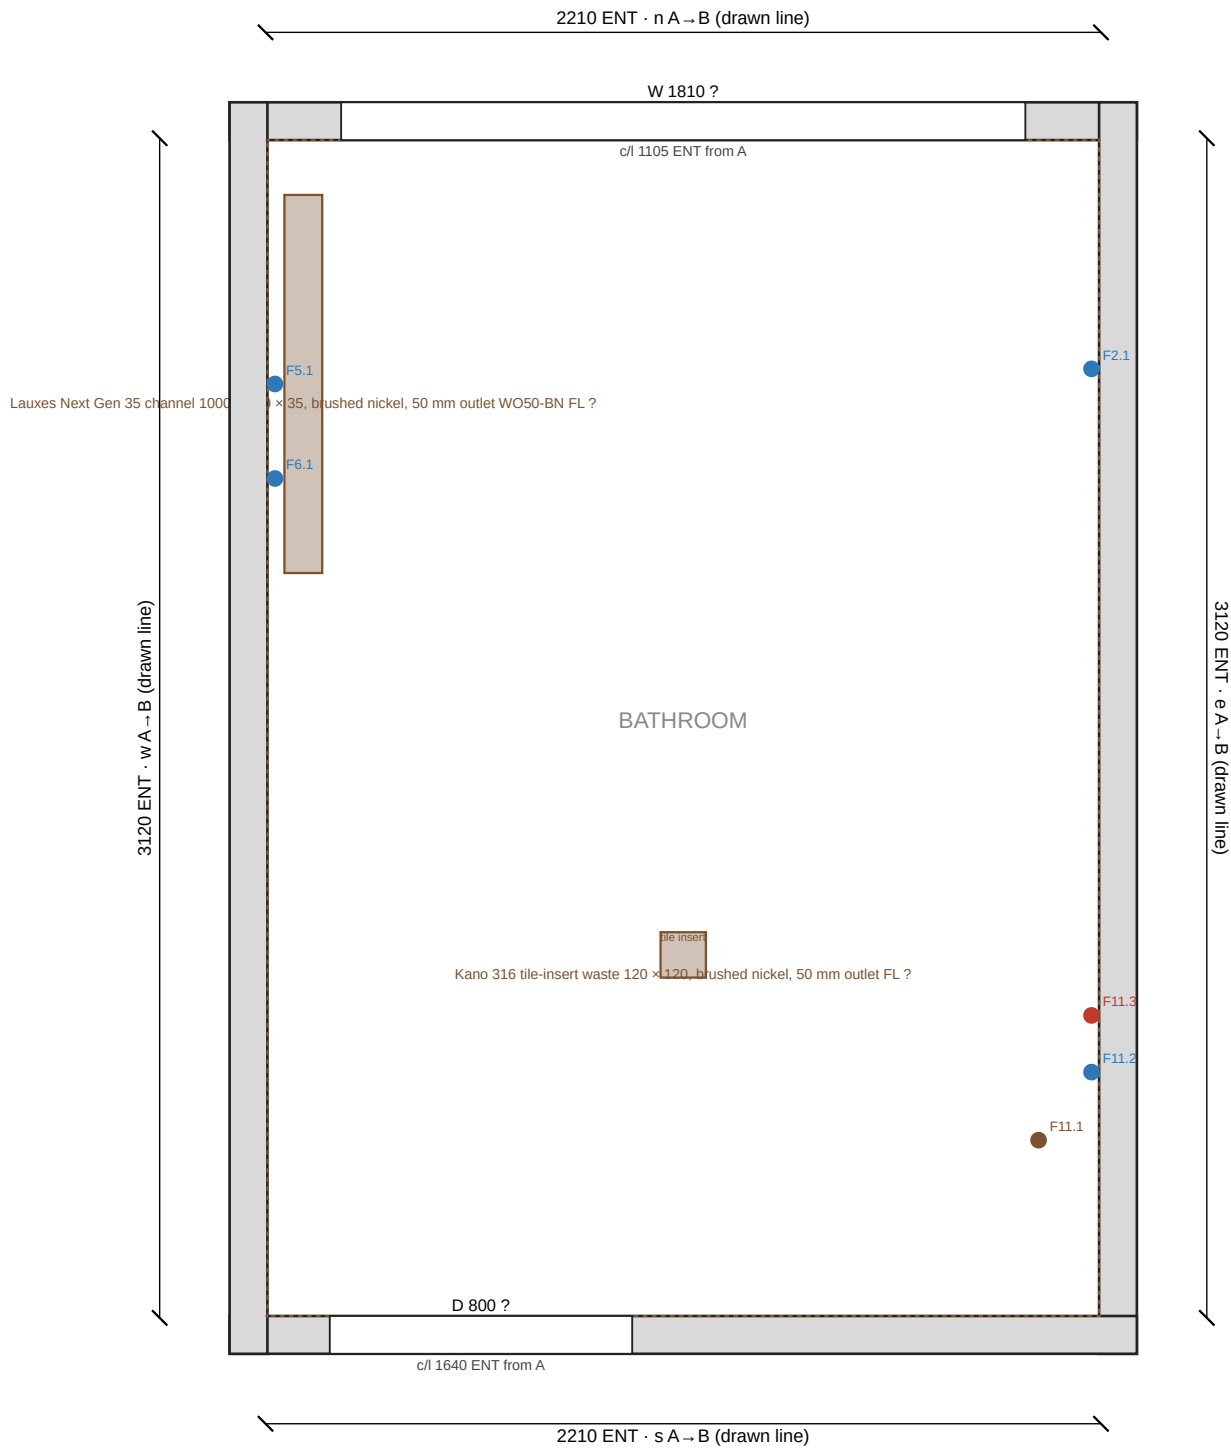

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

Stage: 3. Rough-in: drains and service points

Shows 20 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall e right: frame face: frame face position 5 E
Wall s right: frame face: frame face position 5 E
Wall w right: frame face: frame face position 5 E

Floor (mm above datum)

Bathroom floor: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?

Rough-in (as entered, from the named face)

Bath mixer and spout: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): out from finished face 0 P · across from fixture centreline 60 P · up from finished floor 750 P · along from end A 610 P
Shower system: G1/2 inlet at the upper wall rose (on the rail centreline): out from finished face 0 P · across from fixture centreline 0 P · up from finished floor 1700 P · along from end A 2470 P
Shower mixer: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): out from finished face 0 P · across from fixture centreline 0 P · up from finished floor 1000 P · along from end A 2220 E
Toilet: Pan waste, S-trap (floor): out from finished face 140–260 PUB · across from fixture centreline 0 PUB · up from finished floor ? · along from end A 2650 P
Toilet: Cold water point (stop tap): out from finished face 0 PUB · across from fixture centreline -180 PUB · up from finished floor 180 PUB · along from end A 2470 P
Toilet: SpaLet seat power point: out from finished face 0 PUB · across from fixture centreline -330 PUB · up from finished floor 300 PUB · along from end A 2320 P


Unresolved in this view (6)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Toilet: Pan waste, S-trap (floor): up from finished floor (mm) unknown; printed as "?" (missing up height).

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage diagram: 3. Rough-in: drains and service points
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

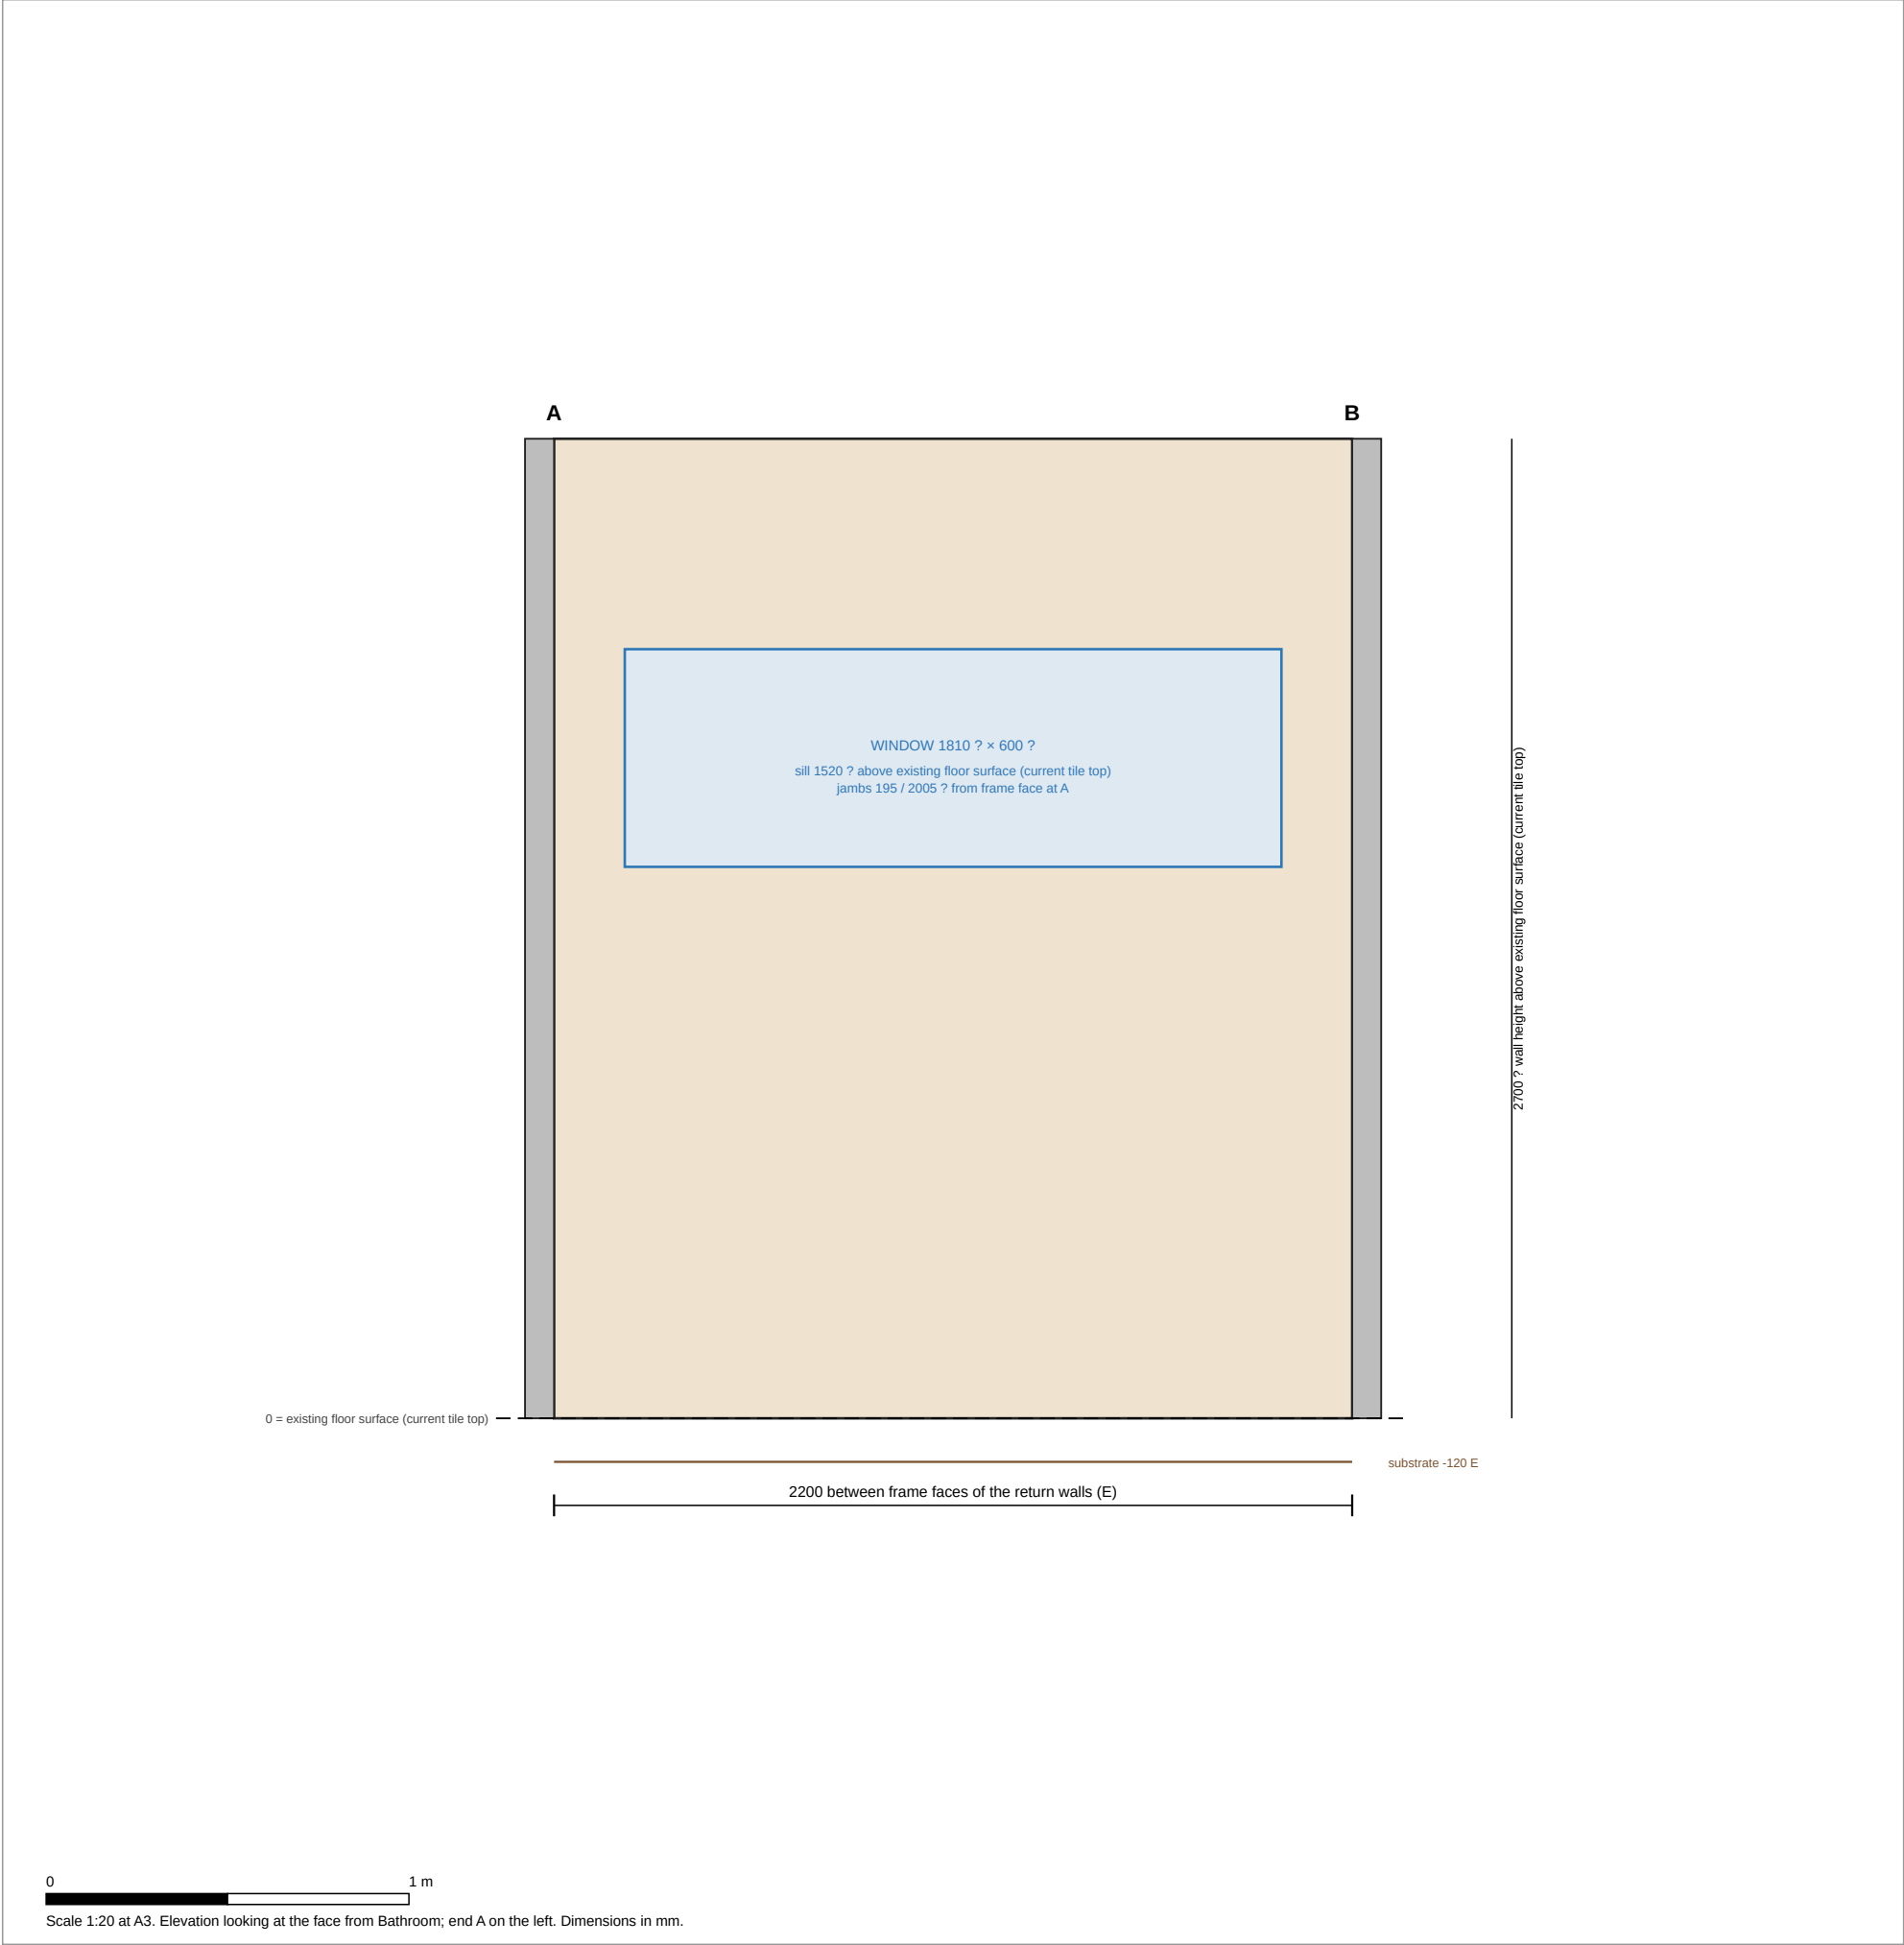

Stage: 3. Rough-in: drains and service points

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_w (right side) at 5 E along the drawn line.
End B: Frame face of wall_e (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 3. Rough-in: drains and service points

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_n (right side) at 5 E along the drawn line.
End B: Frame face of wall_s (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Service points (AFF = above finished floor)

F2.1 water · Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): 605 E from frame face at A · 750 P above finished floor · 0 P out from finished face
F11.1 waste · Pan waste, S-trap (floor): 2645 E from frame face at A · up ? · 140–260 PUB out from finished face
F11.2 water · Cold water point (stop tap): 2465 E from frame face at A · 180 PUB above finished floor · 0 PUB out from finished face
F11.3 power · SpaLet seat power point: 2315 E from frame face at A · 300 PUB above finished floor · 0 PUB out from finished face



Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Stage: 3. Rough-in: drains and service points

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_e (right side) at 5 E along the drawn line.
End B: Frame face of wall_w (right side) at 2205 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 3. Rough-in: drains and service points

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: frame face, 5 from the drawn line E.
End A: Frame face of wall_s (right side) at 5 E along the drawn line.
End B: Frame face of wall_n (right side) at 3115 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)

Service points (AFF = above finished floor)

F5.1 water · G1/2 inlet at the upper wall rose (on the rail centreline): 2465 E from frame face at A · 1700 P above finished floor · 0 P out from finished face
F6.1 water · Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): 2215 E from frame face at A · 1000 P above finished floor · 0 P out from finished face



0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 3. Rough-in: drains and service points · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 3. Rough-in: drains and service points

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 20 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall frame faces (after strip-out)						
Wall n right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_n, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall e right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_e, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall s right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_s, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall w right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_w, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						



Element	Property	Value	Status	Measured from	Source	Missing
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor wastes						
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)
Waste service points						

Element	Property	Value	Status	Measured from	Source	Missing
Toilet: Pan waste, S-trap (floor)	service	waste	ENT entered			
	out from finished face (mm)	140–260	PUB published	finished face	American Standard M33158 Rev.03 install sheet: S-trap set-out 140–260 mm from the finished wall to the waste centre (260 nominal), on the pan centreline. A P-trap is 190 mm high instead	
	across from fixture centreline (mm)	0	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: S-trap set-out 140–260 mm from the finished wall to the waste centre (260 nominal), on the pan centreline. A P-trap is 190 mm high instead	
	up from finished floor (mm)	?	? unknown			up height
	along from end A (mm)	2650	P proposed	wall_e end A		
Water service points						
Bath mixer and spout: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	across from fixture centreline (mm)	60	P proposed	fixture-centreline	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	up from finished floor (mm)	750	P proposed	finished floor	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	along from end A (mm)	610	P proposed	wall_e end A		
Shower system: G1/2 inlet at the upper wall rose (on the rail centreline)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	
	across from fixture centreline (mm)	0	P proposed	fixture-centreline	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	
	up from finished floor (mm)	1700	P proposed	finished floor	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	
	along from end A (mm)	2470	P proposed	wall_w end A		
Shower mixer: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	across from fixture centreline (mm)	0	P proposed	fixture-centreline	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	up from finished floor (mm)	1000	P proposed	finished floor	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	along from end A (mm)	2220	E estimated	wall_w end A		
Toilet: Cold water point (stop tap)	service	water	ENT entered			
	out from finished face (mm)	0	PUB published	finished face	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	across from fixture centreline (mm)	-180	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	up from finished floor (mm)	180	PUB published	finished floor	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	along from end A (mm)	2470	P proposed	wall_e end A		
Power service points						
Toilet: SpaLet seat power point	service	power	ENT entered			
	out from finished face (mm)	0	PUB published	finished face	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved vanity GPO is the electrician's call	
	across from fixture centreline (mm)	-330	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved vanity GPO is the electrician's call	
	up from finished floor (mm)	300	PUB published	finished floor	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved	

Element	Property	Value	Status	Measured from	Source	Missing
					vanity GPO is the electrician's call	
	along from end A (mm)	2320	P proposed	wall_e end A		

Unresolved in this view (6)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Toilet: Pan waste, S-trap (floor): up from finished floor (mm) unknown; printed as "?" (missing up height).

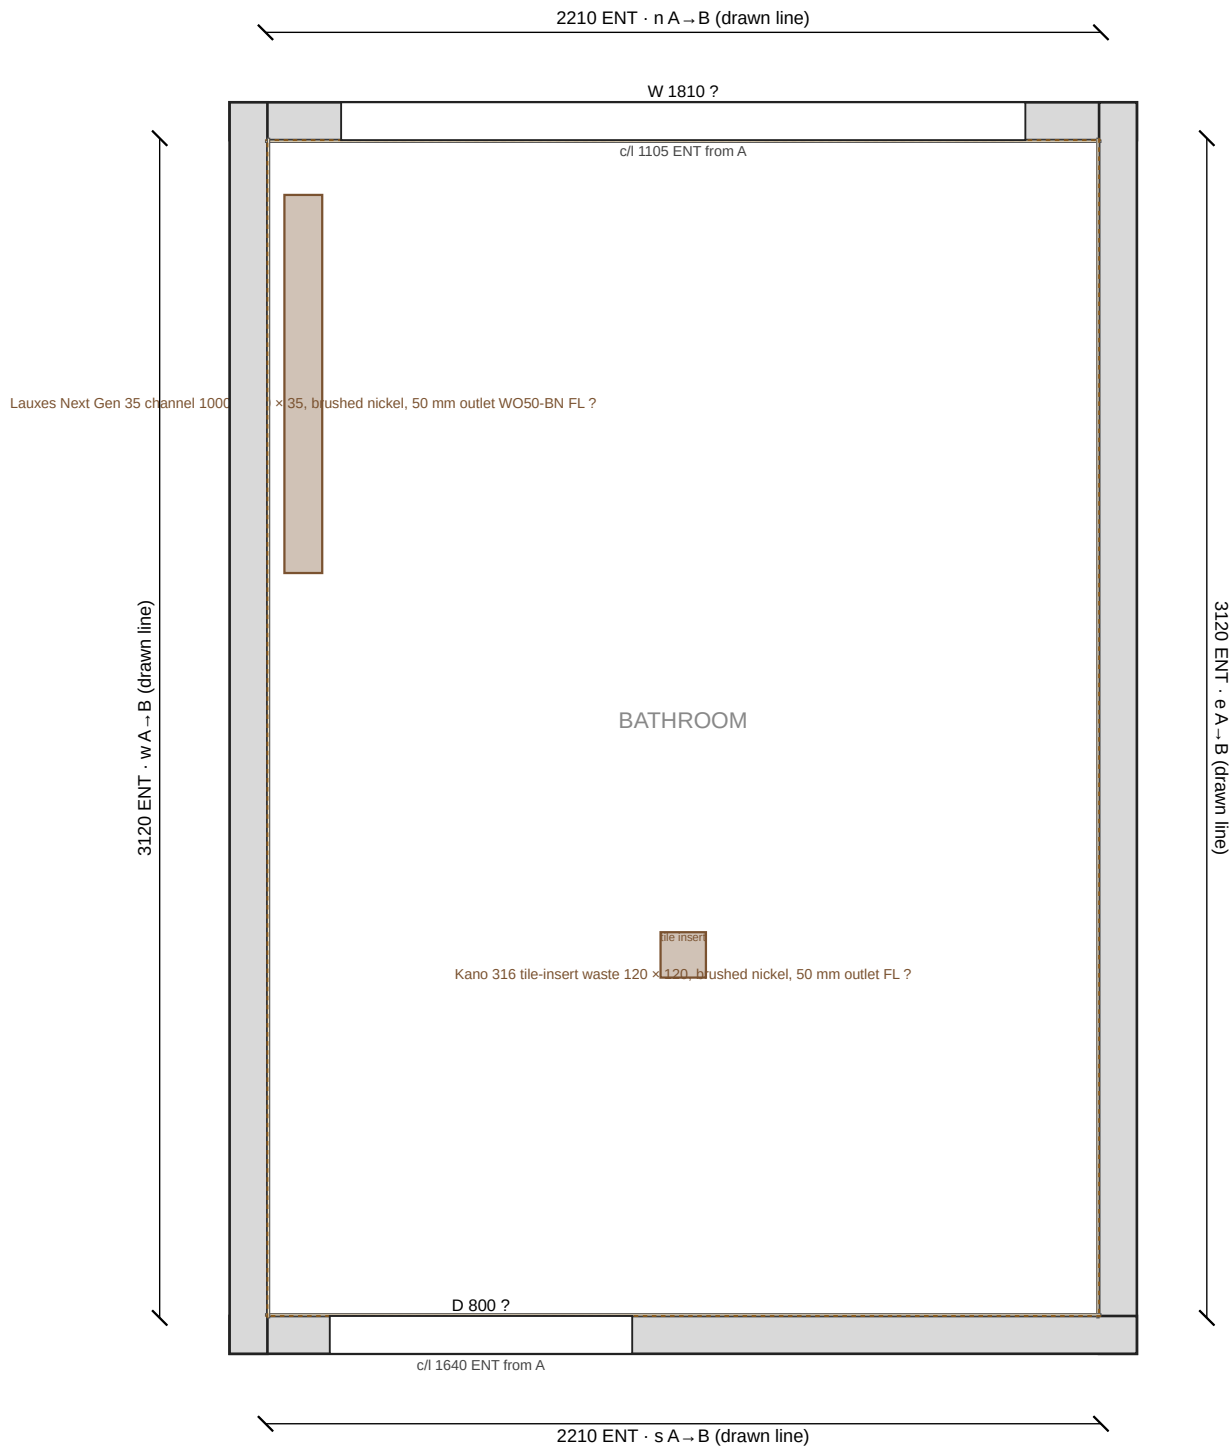

Stage: 4. Waterproofing: floor membrane only (stopgap)

Shows 19 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

Not modelled, never drawn: pipe and cable runs between service points.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Drawn dashed as stand-ins: Floor waterproofing.

Wall faces and layers (mm from drawn line)

Wall n right: frame face: frame face position 5 E
Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: frame face: frame face position 5 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: frame face: frame face position 5 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: frame face: frame face position 5 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?

Unresolved in this view (5)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 4. Waterproofing: floor membrane only (stopgap)

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

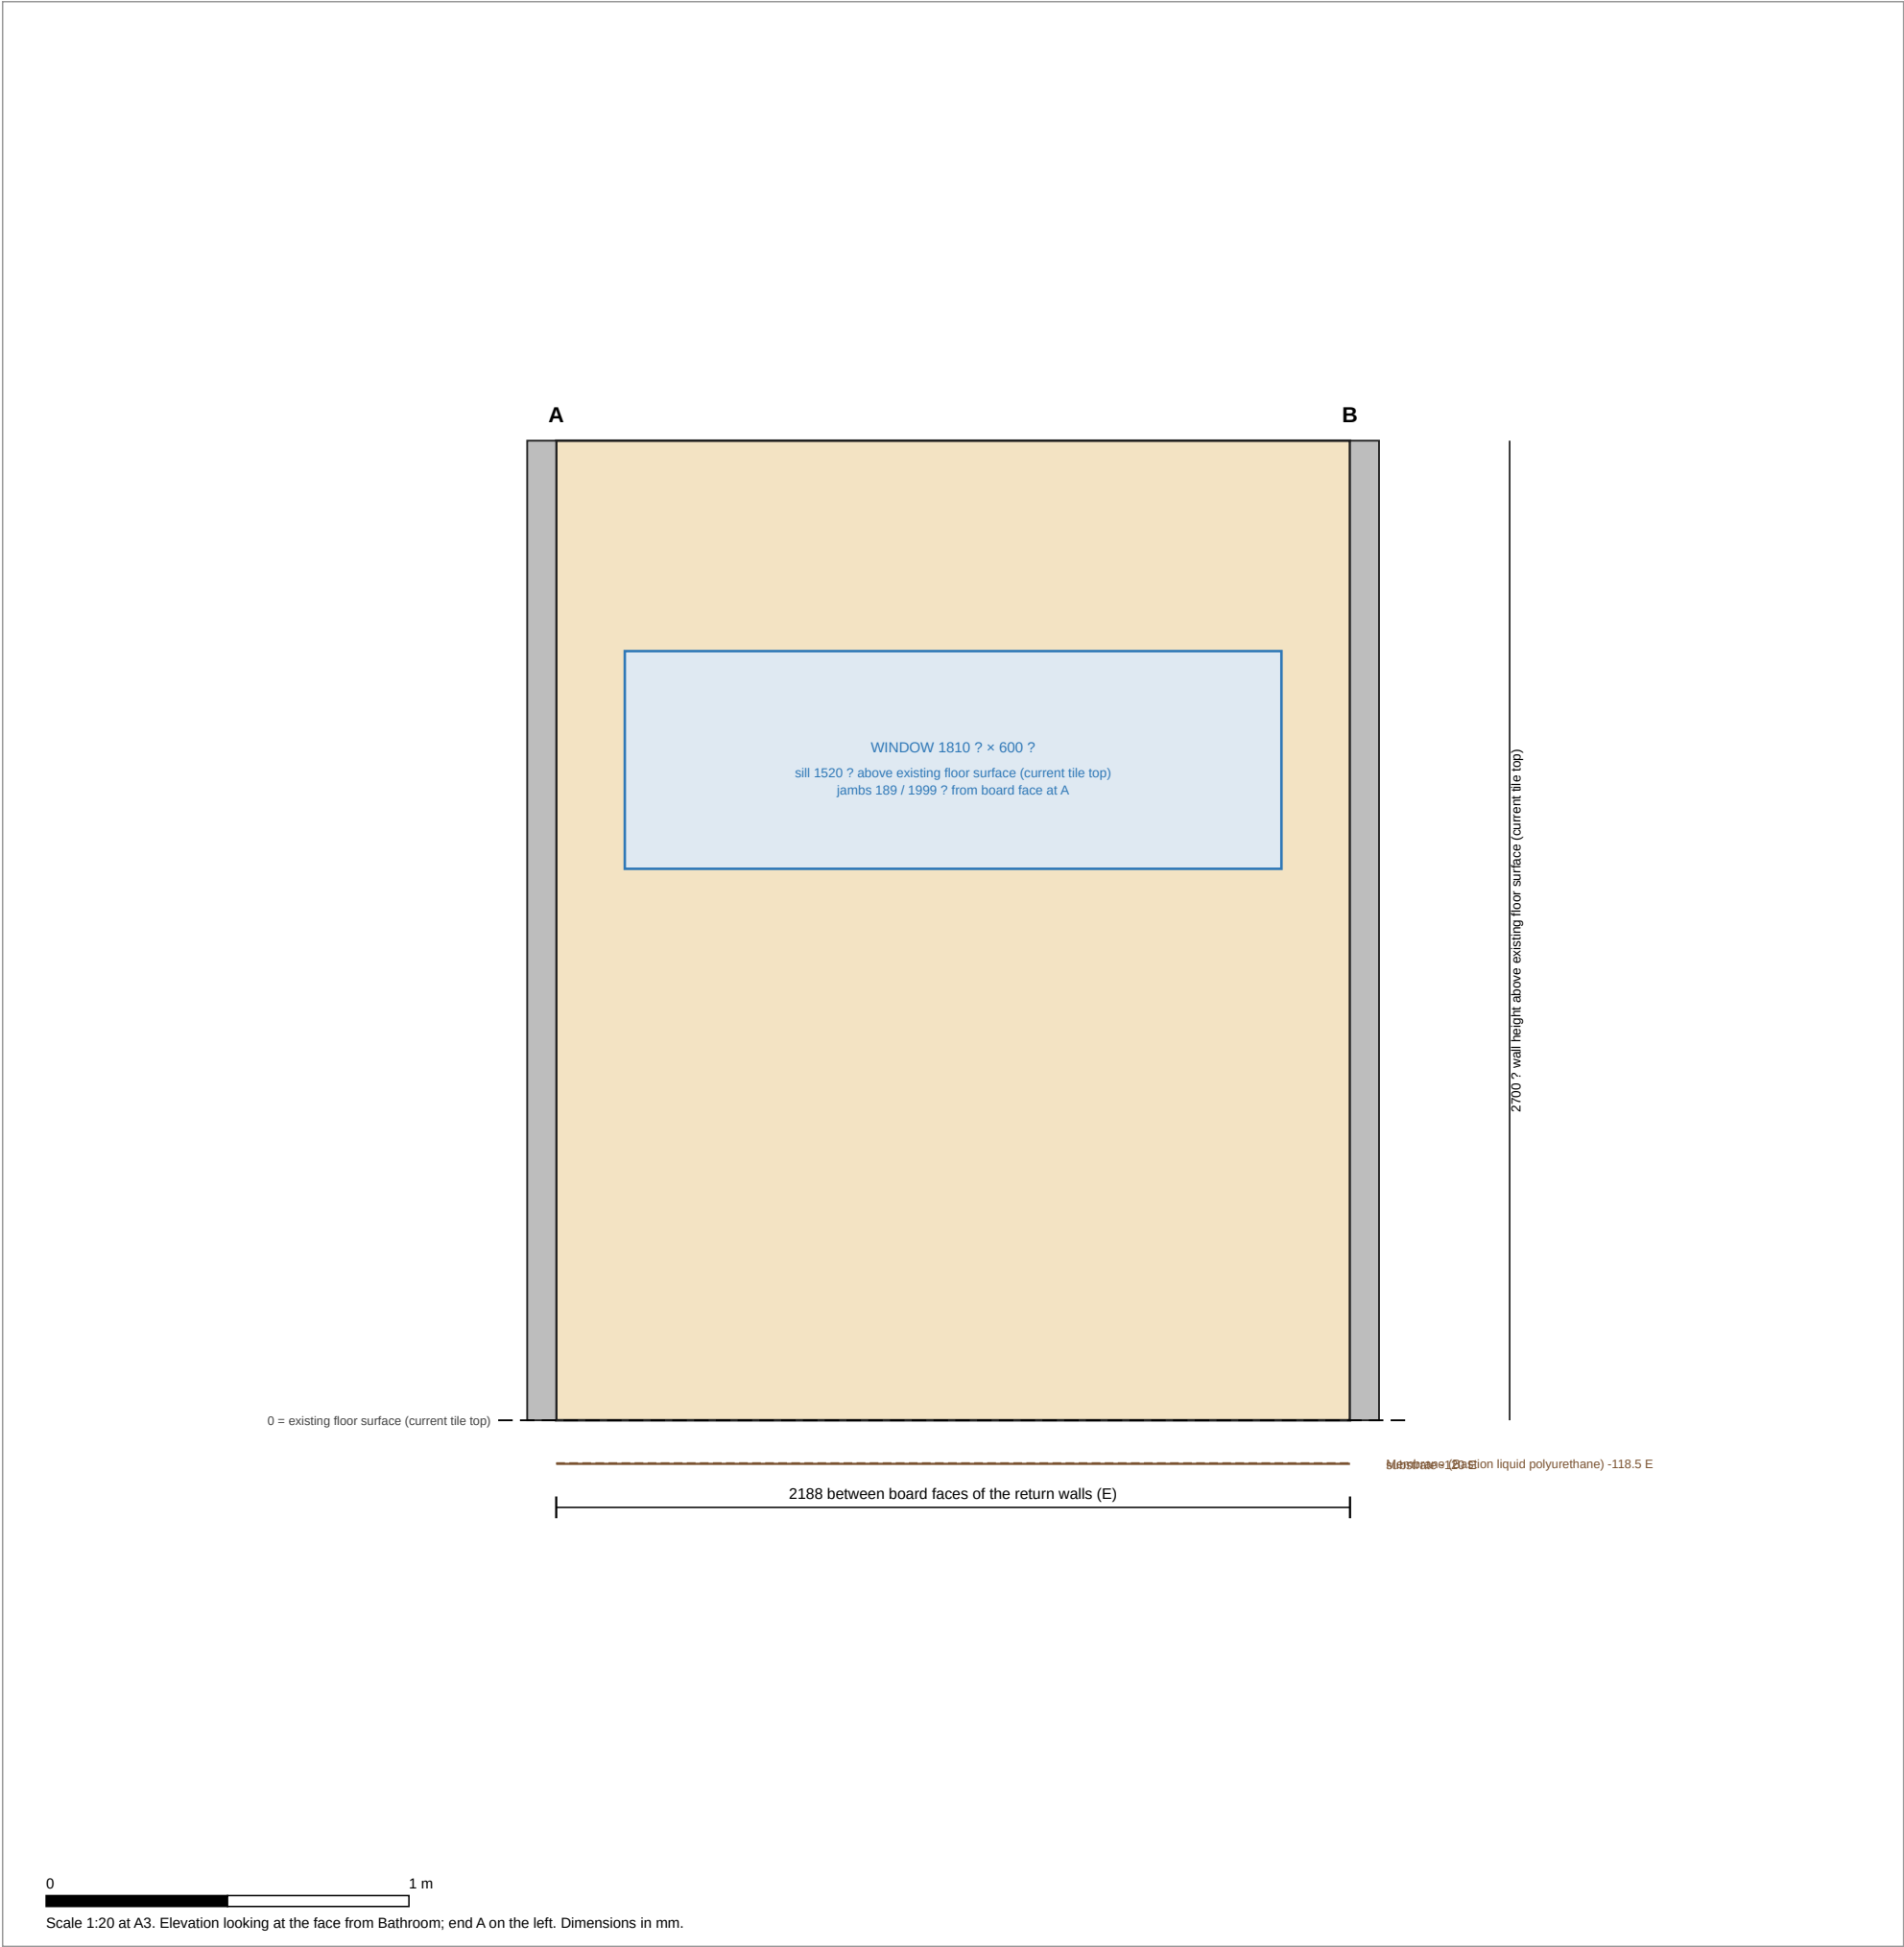

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face


Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

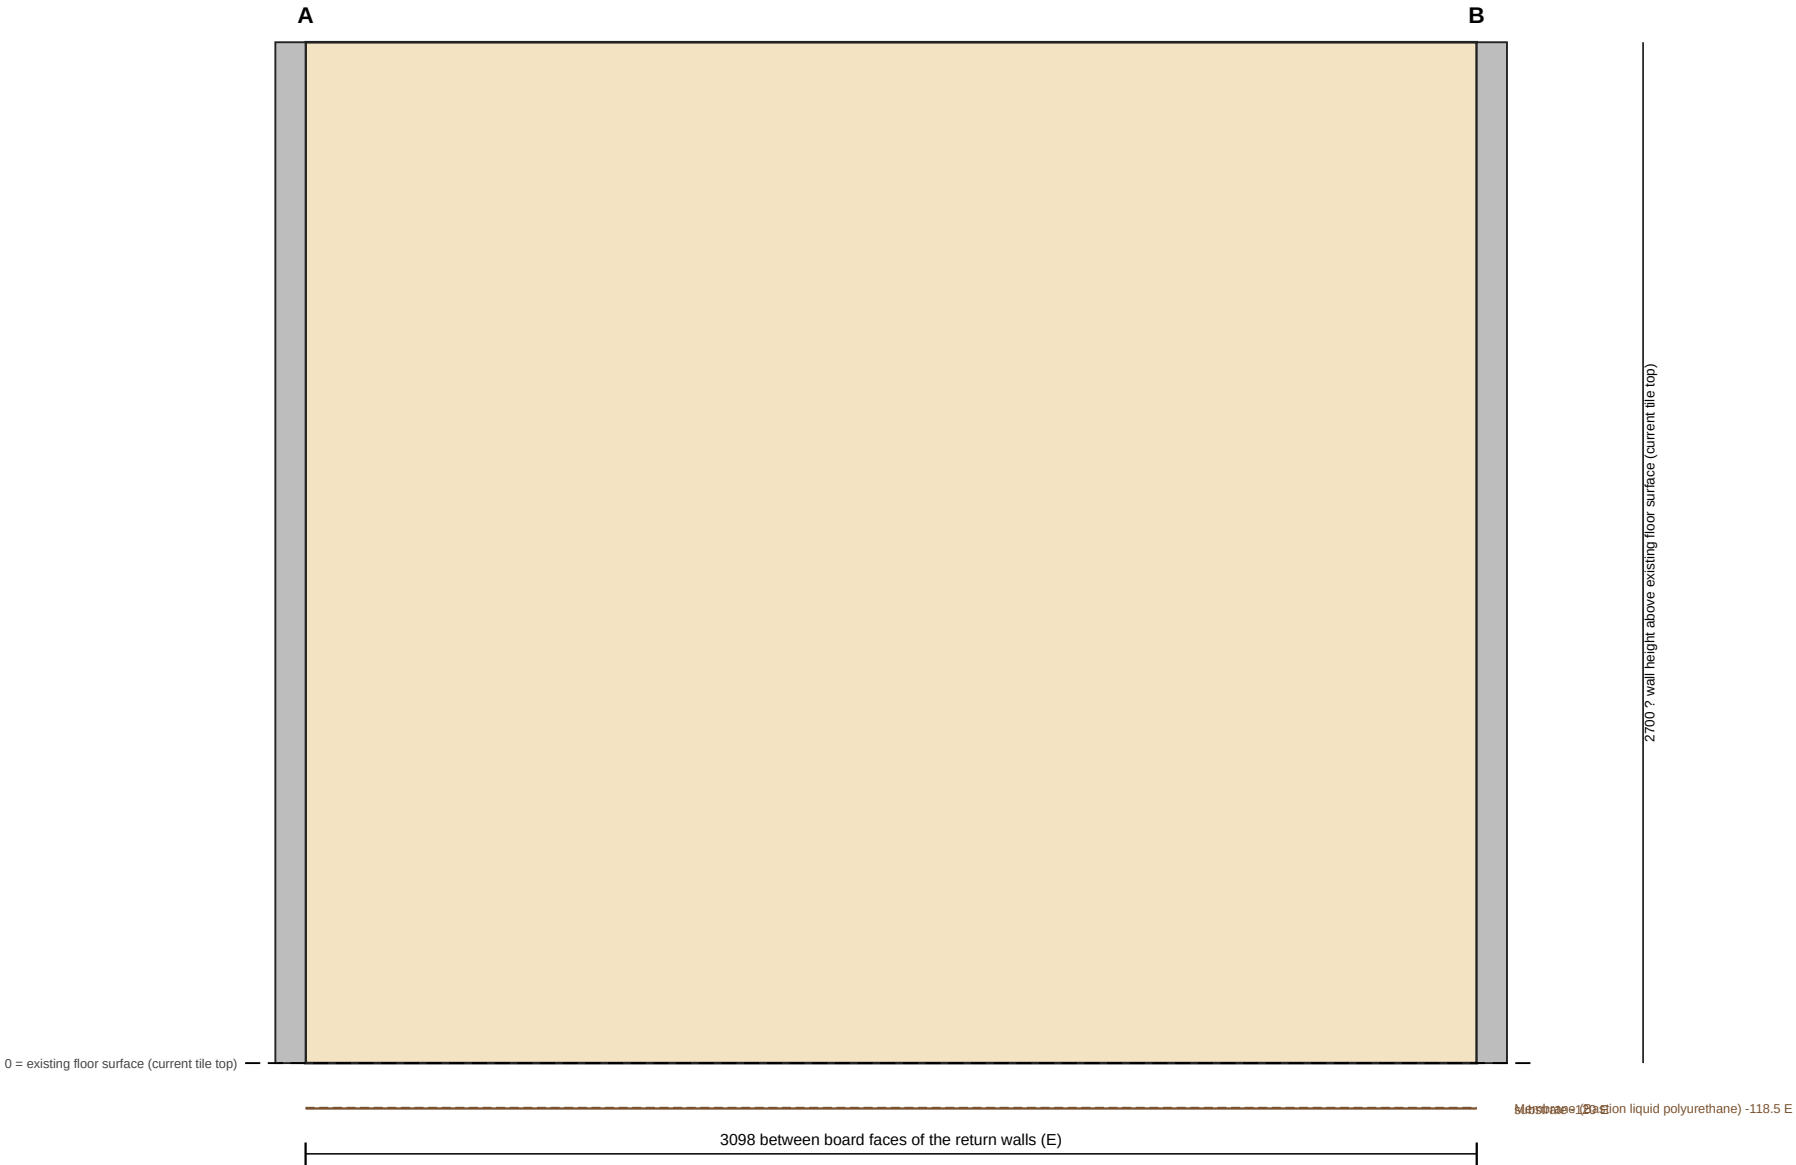


Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

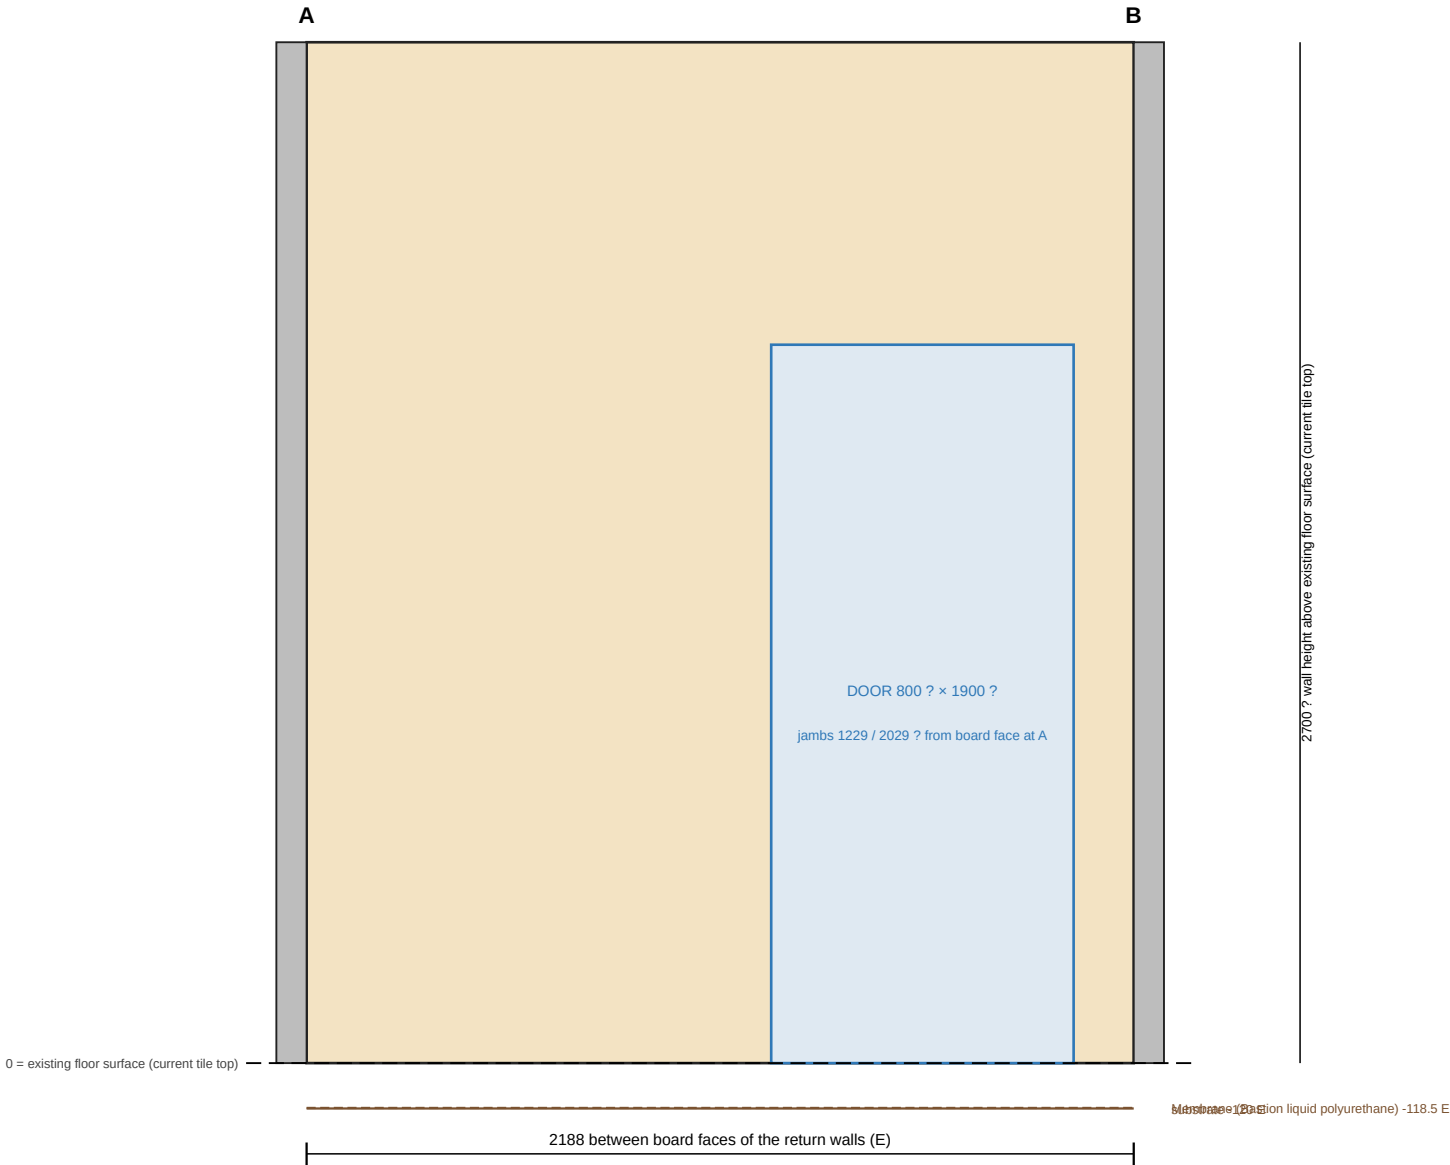

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_e (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_w (right side) at 2199 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 4. Waterproofing: floor membrane only (stopgap)

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face


Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

STOPGAP VIEW: not recorded

Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

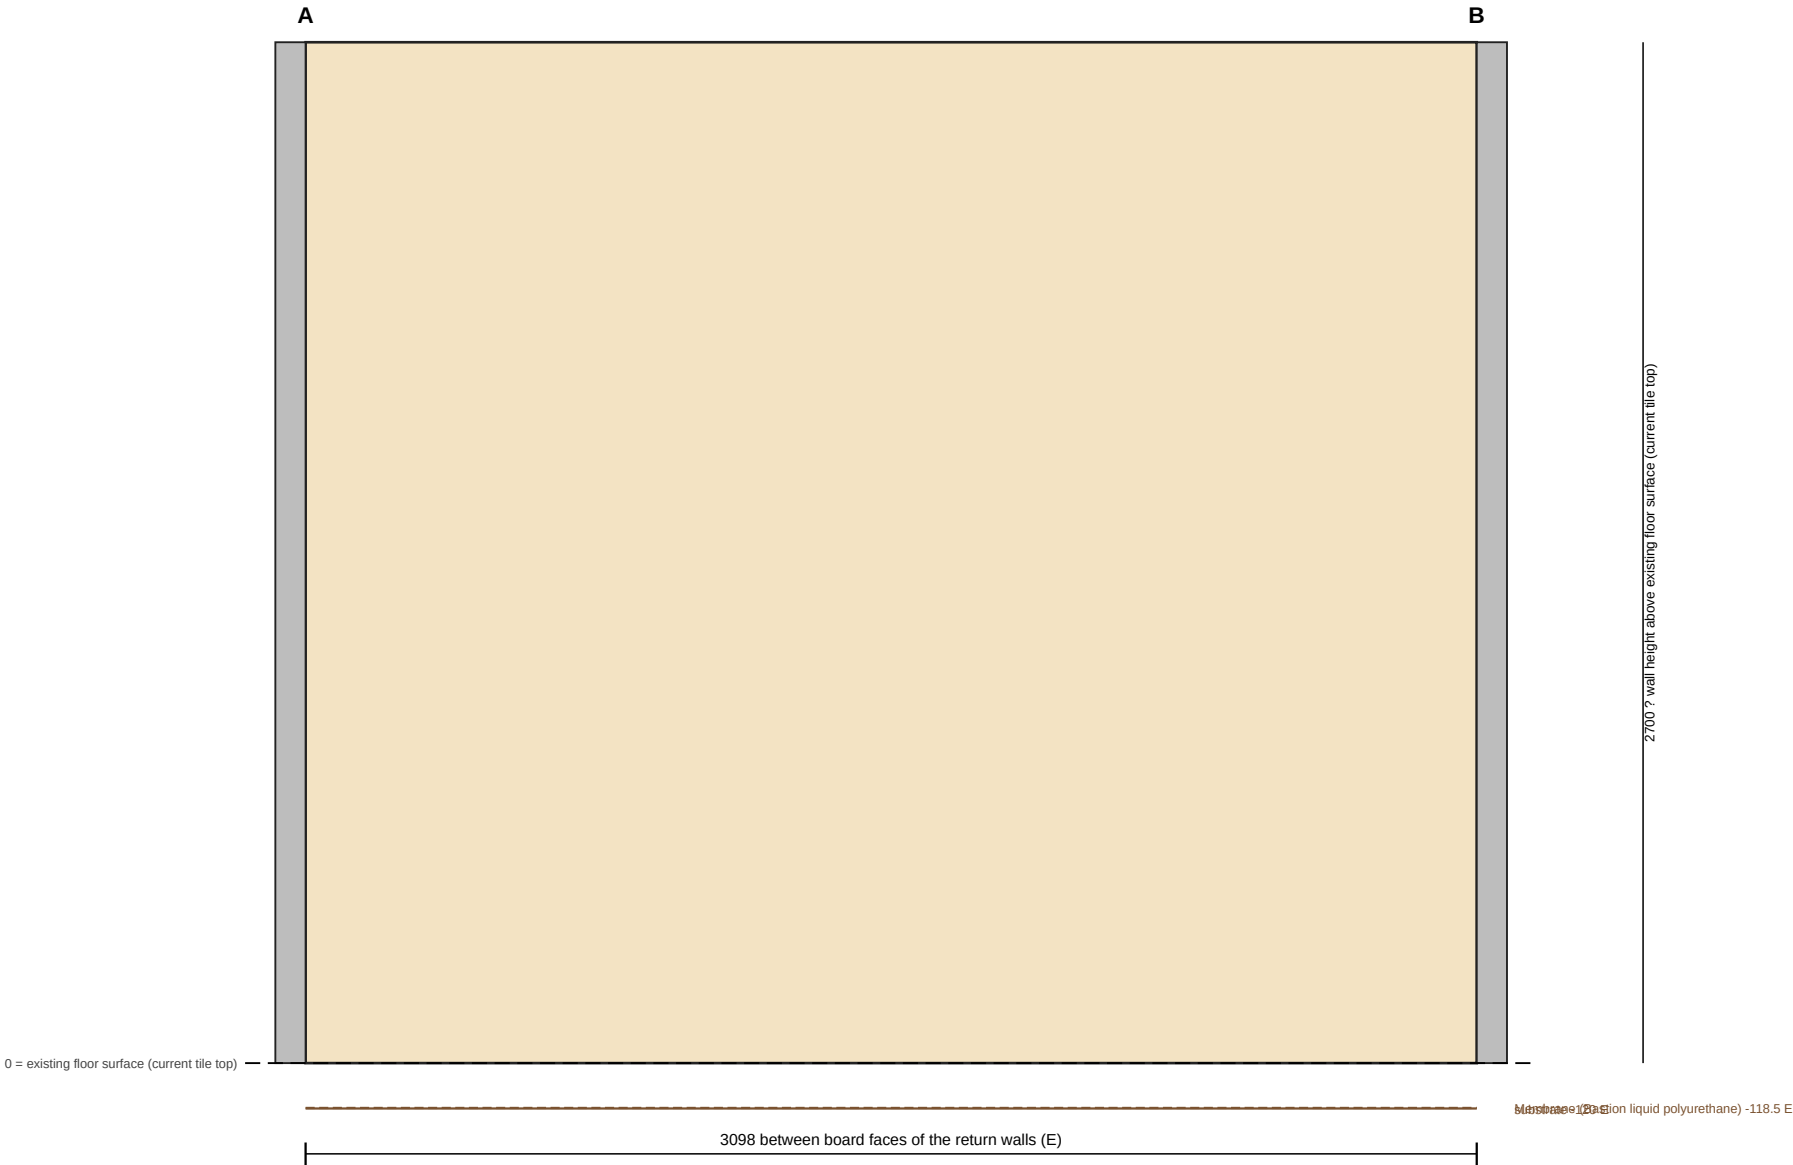

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 4. Waterproofing: floor membrane only (stopgap) · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Specification: 4. Waterproofing: floor membrane only (stopgap)

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 19 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall frame faces (after strip-out)						
Wall n right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_n, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall e right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_e, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall s right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_s, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall w right: frame face	frame face position (mm)	5	E estimated	drawn line of wall_w, toward right side	surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition	
Wall board (e.g. Villaboard)						
Wall n right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_n, toward right side		
Wall e right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_e, toward right side		
Wall s right: Villaboard 6 mm	kind	board	ENT entered			

Element	Property	Value	Status	Measured from	Source	Missing
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_s, toward right side		
Wall w right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor waterproofing						
Bathroom floor: Membrane (Bastion liquid polyurethane)	kind	waterproofing	ENT entered			
	thickness (mm)	1.5	E estimated		owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm	
	top level (mm)	-118.5	E estimated	existing floor surface (current tile top)		
Floor wastes						
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			


Element	Property	Value	Status	Measured from	Source	Missing
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)

Not recorded in this stopgap view (1)

- Wall waterproofing membrane: not recorded in the sample, so not drawn or listed.

Unresolved in this view (5)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).

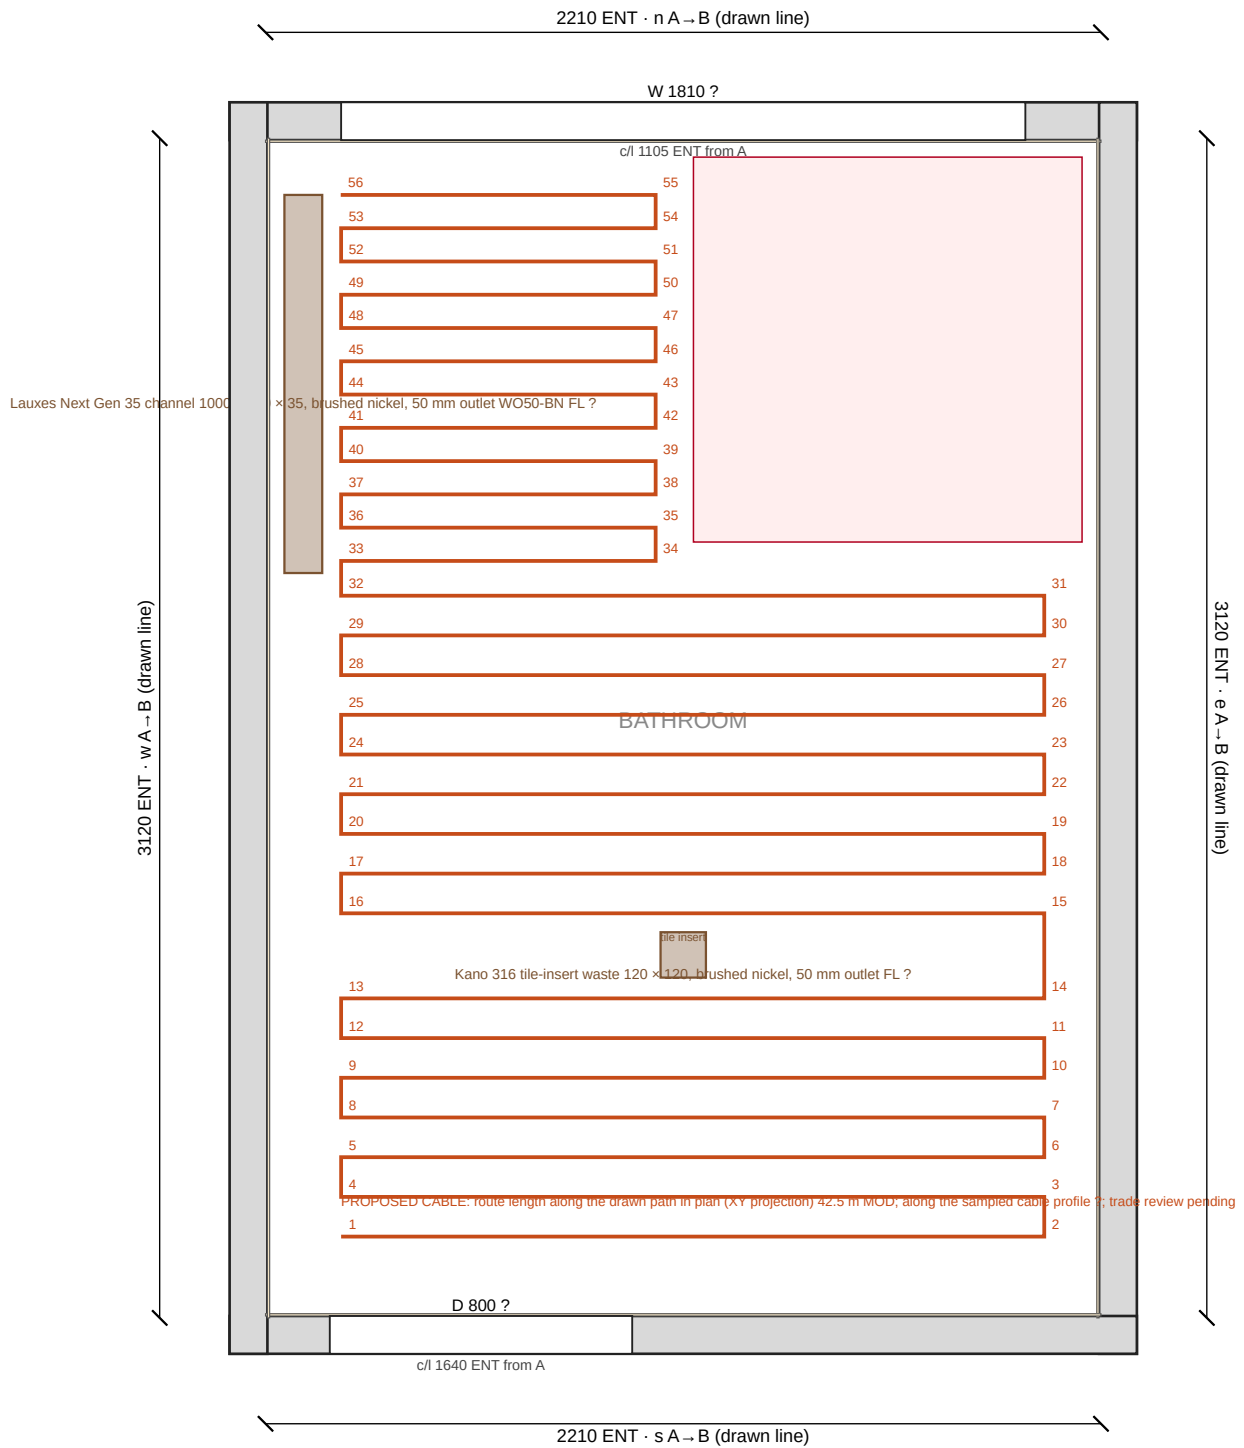

Stage: 5. Heating cable on the membrane

Shows 16 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E

Drainage / heating

Bathroom: proposed heating cable: manufacturer ? · model SCK0765L ENT · product length (m) 42.5 PUB · rated output (W) 765 PUB · derived spacing min 87.1 DER · derived spacing max 120 DER · plan route length (m) 42.5 MOD · spatial route length, sampled profile (m) ?
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate 1000 × 100 M
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate 120 × 120 tile insert M

Unresolved in this view (16)

- Bathroom: proposed heating cable: heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- Bathroom: proposed heating cable: heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- Bathroom: proposed heating cable: heating_coverage_range: Zone area excluding entered keep-outs 5.3257 m² (availableArea, same resolver as evidence; not a laid-cable heat-coverage model) is outside the brief coverage range 3.7–5.1 m² (published, project-snapshot (unresolved), carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum).
- Bathroom: proposed heating cable: heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- Bathroom: proposed heating cable: heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.

... 8 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 5. Heating cable on the membrane

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

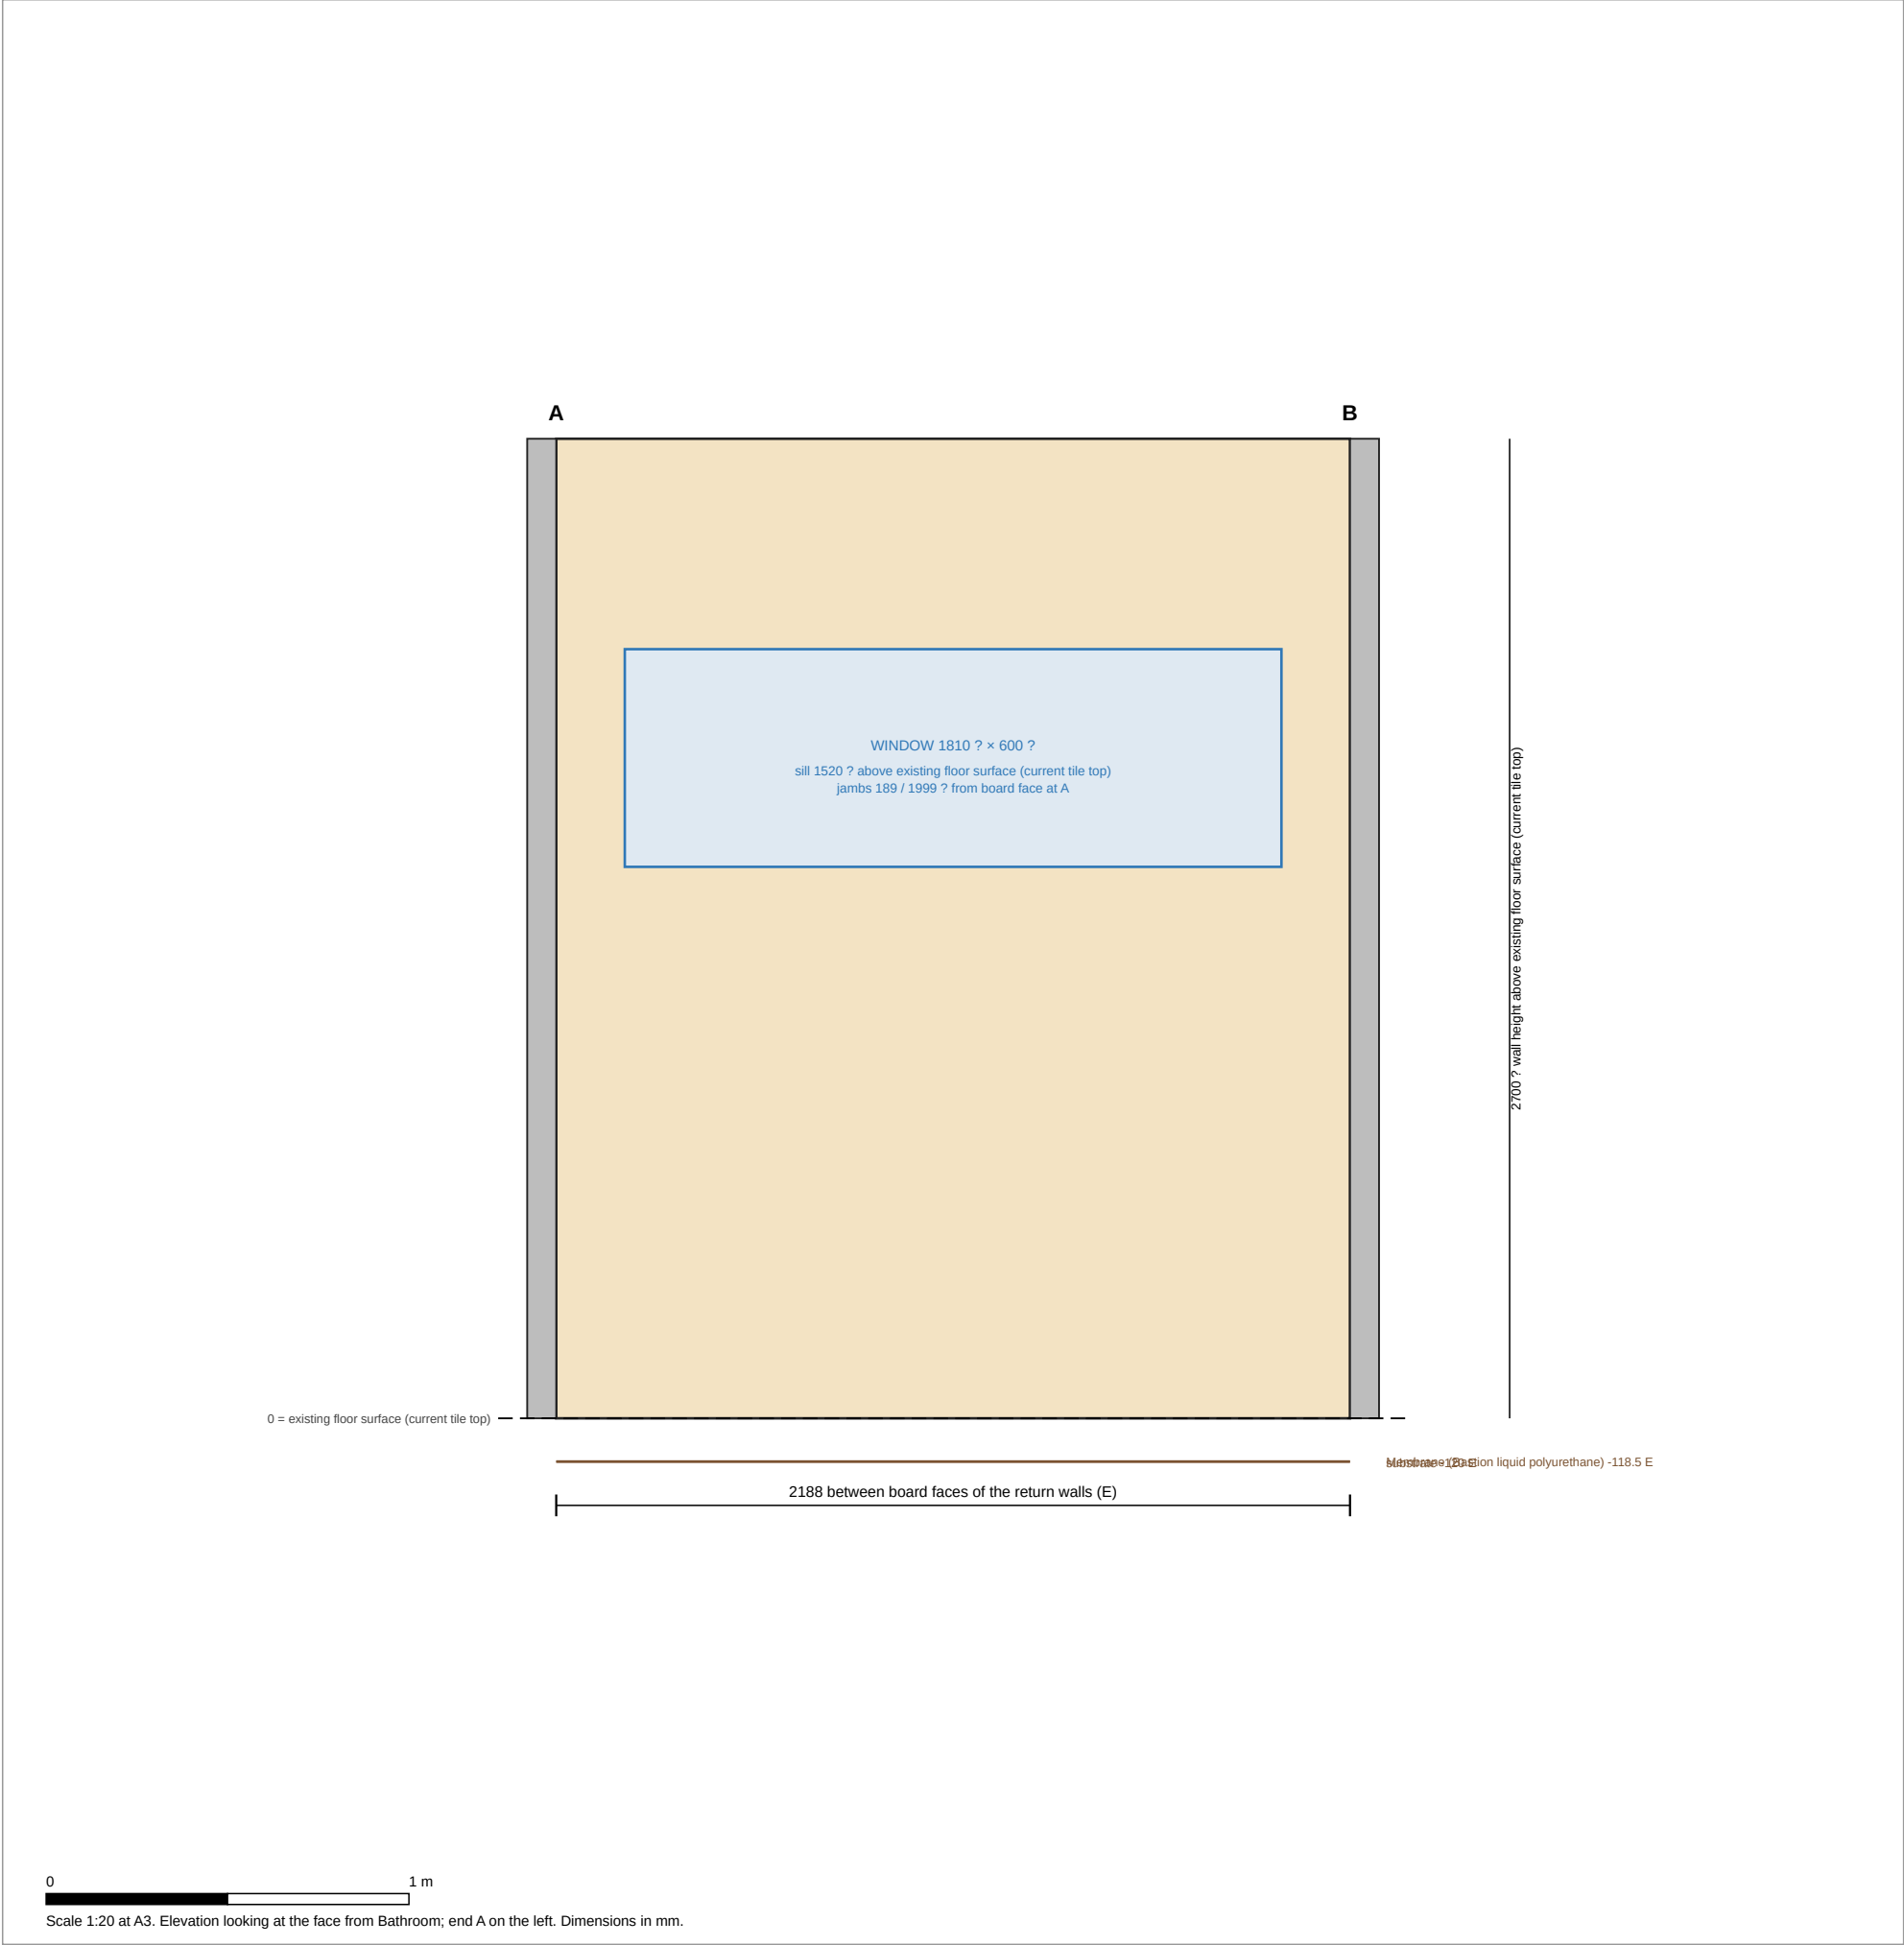

Stage: 5. Heating cable on the membrane

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)

Stage elevation: 5. Heating cable on the membrane · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 5. Heating cable on the membrane


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

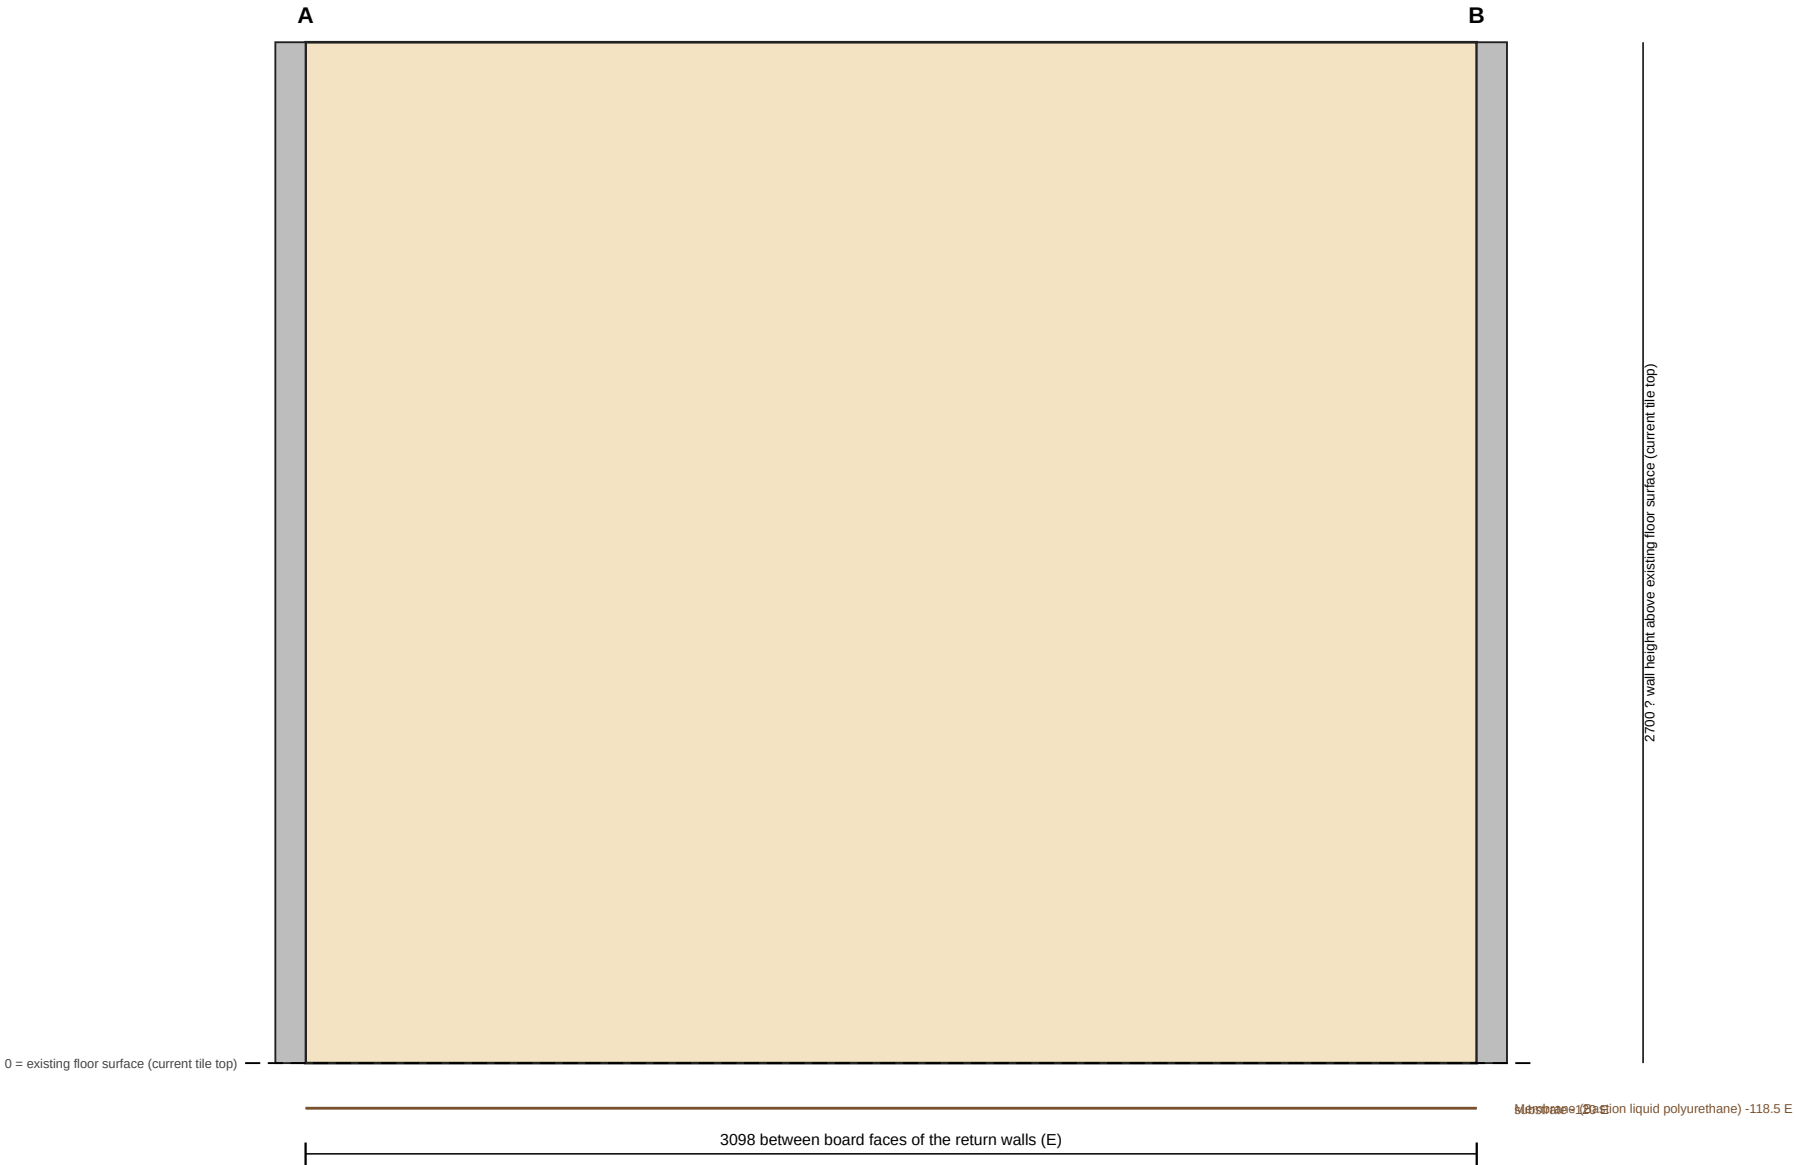

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 5. Heating cable on the membrane · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Stage: 5. Heating cable on the membrane


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)

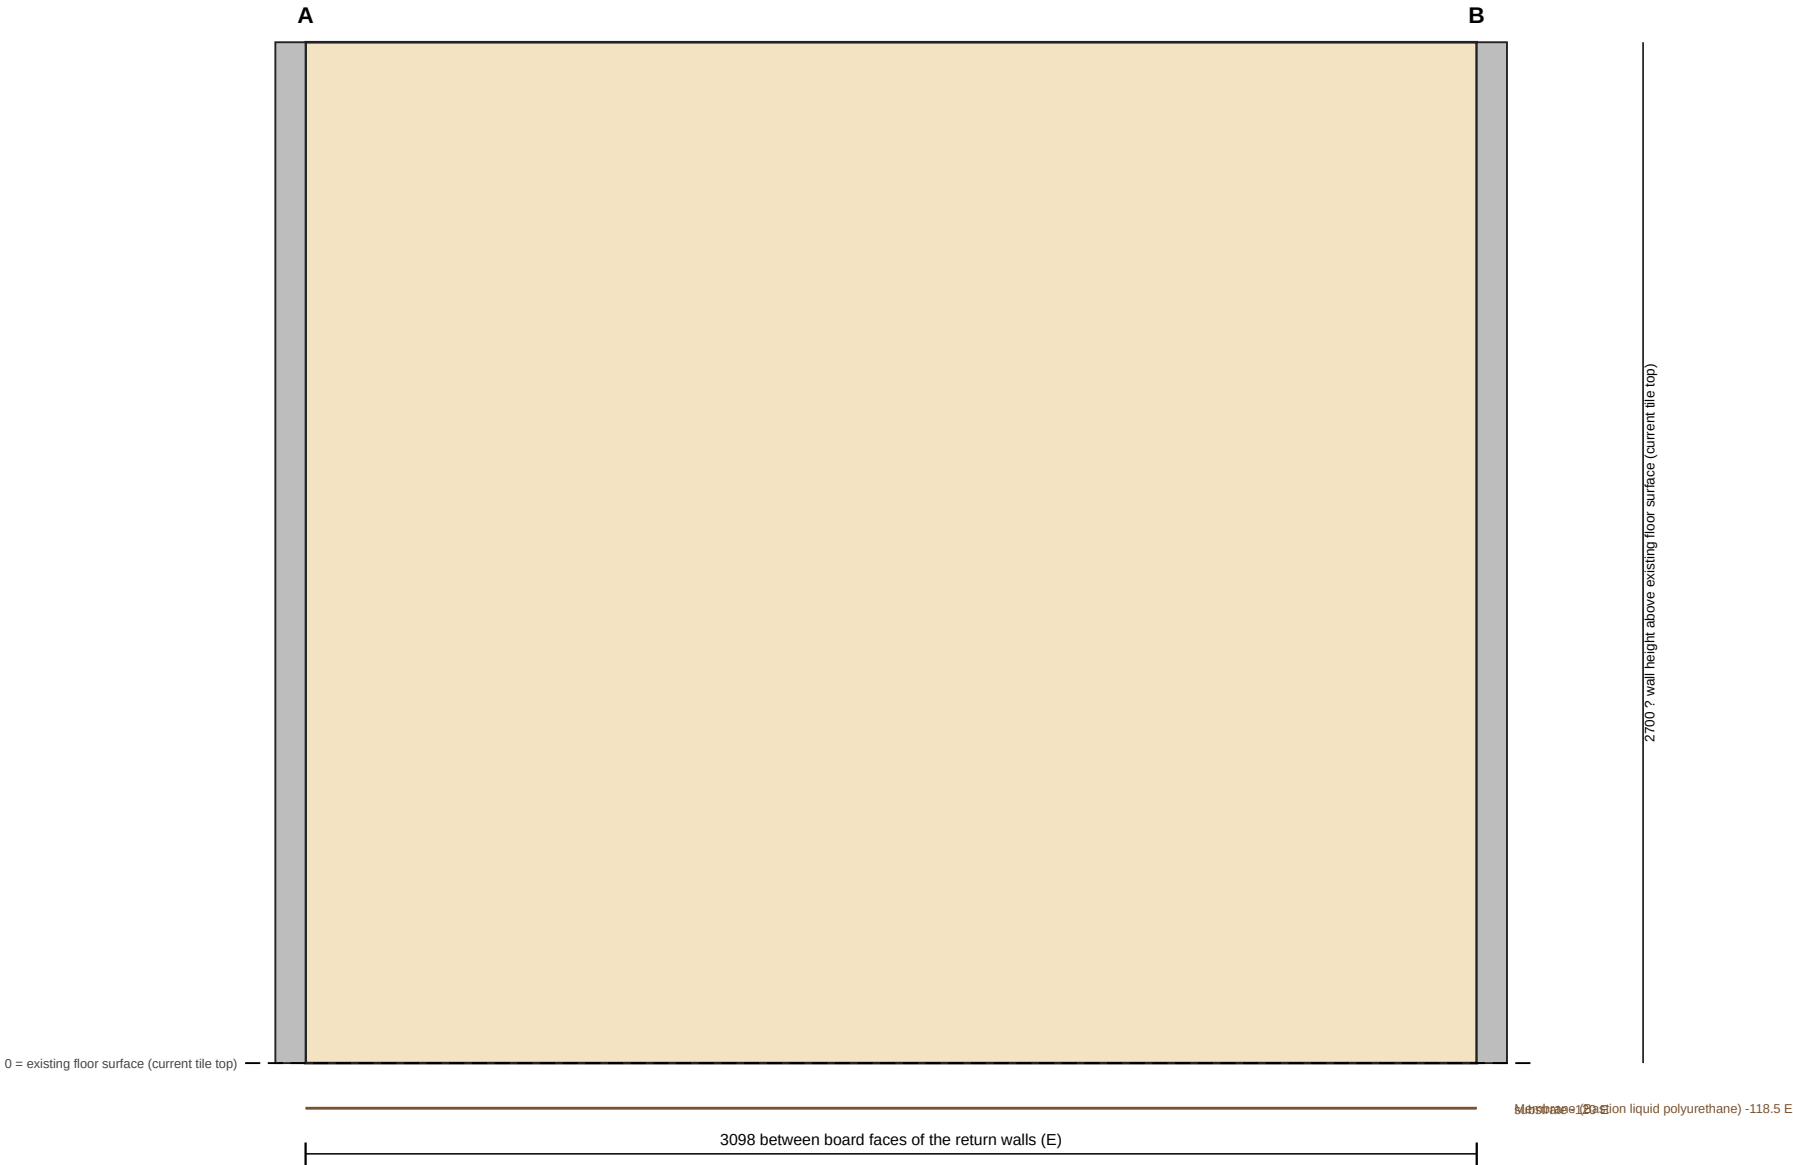

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 5. Heating cable on the membrane · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 5. Heating cable on the membrane

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 16 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)					
Wall n					
length A – B along drawn line (mm)	2210	ENT entered			
thickness (mm)	100	? unknown			
height (mm)	2700	? unknown			
Wall e					
length A – B along drawn line (mm)	3120	ENT entered			
thickness (mm)	100	? unknown			
height (mm)	2700	? unknown			
Wall s					
length A – B along drawn line (mm)	2210	ENT entered			
thickness (mm)	100	? unknown			
height (mm)	2700	? unknown			
Wall w					
length A – B along drawn line (mm)	3120	ENT entered			
thickness (mm)	100	? unknown			
height (mm)	2700	? unknown			
Wall board (e.g. Villaboard)					
Wall n right: Villaboard 6 mm					
kind	board	ENT entered			
thickness (mm)	6	P proposed		[1]	
outer face position (mm)	11	E estimated	[2]		
Wall e right: Villaboard 6 mm					
kind	board	ENT entered			
thickness (mm)	6	P proposed		[1]	
outer face position (mm)	11	E estimated	[3]		
Wall s right: Villaboard 6 mm					
kind	board	ENT entered			
thickness (mm)	6	P proposed		[1]	
outer face position (mm)	11	E estimated	[4]		
Wall w right: Villaboard 6 mm					
kind	board	ENT entered			
thickness (mm)	6	P proposed		[1]	
outer face position (mm)	11	E estimated	[5]		
Windows					

References (46): full text of the cells printed as [n] above

- owner's tile and build-up choices
- drawn line of wall_n, toward right side
- drawn line of wall_e, toward right side
- drawn line of wall_s, toward right side
- drawn line of wall_w, toward right side
- wall_n end A, along the drawn line
- wall_s end A, along the drawn line
- concrete slab, framed in place (house on piers)
- existing floor surface (current tile top)
- owner: about 120 mm below the current tile, seen from underneath; confirm after demolition
- finished tile back at the current tile level, so the doorway stays flush (to confirm)
- Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)
- owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm
- product identity (submission text, not a published figure)
- Owner lays it on the cured membrane, before the tiler's screed, fixed with Ametalin tape (polyurethane membrane: owner holds 100 m) at the run ends and every 1–1.5 m, per the Coldbuster in-screed manual (July 2023, taken as this cable's manual: it does not name SCK0765L). The electrician tests it before and after the screed (the manual's p. 16 record, for the warranty), wires the thermostat on an RCD circuit, and runs the floor sensor's conduit. Owner, 5 Oct 2026: the thermostat end is at the bathroom doorway, where

the floor beyond is timber; the 3.0 m cold tail (manual: the manual's cable is Ø6 mm) goes down through it to under the house (on piers). Owner, 7 Oct 2026: the cable runs under the shower (the electrician approved it) but not under the bath, so the heated area stays within the 5.1 m² that 42.5 m covers. Proposed loop: east–west runs, 100 mm off the walls and the bath (manual, p. 6), 150 mm off the left wall to clear the linear drain, widened round the Kano waste (manual, p. 10), 105 mm in the dry area and 88 mm in the shower and beside the bath (tighter where the floor is wet), both inside the derived coverage/length range (3.7–5.1 m² / 42.5 m = 87–120 mm) and the Coldbuster manual's 70–120 mm for bathrooms (p. 7); the two spacings make the loop use exactly 42.5 m. Modelling choice, not a manufacturer or code spacing requirement. Plan length is exactly 42.5 m, equal to the published heated length (zero slack); any resolved fail makes the spatial route exceed 42.5 m once screed levels resolve. Not yet decided: keep-outs at the toilet (its pan is screwed to the floor through brackets) and the vanity; the route runs under both.

- carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m
- carton label — SCK0765L in-screed heating cable carton: 765 W
- carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum
- carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum
- coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m² (published, carton label — SCK0765L in-screed heating cable

carton: coverage 3.7–5.1 m², minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).

- coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).
- carton label — SCK0765L in-screed heating cable carton: 3.2 A
- carton label — SCK0765L in-screed heating cable carton: 240 V AC
- carton label — Photographed MWD5-1999-CBP3 carton label: 16 A
- carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC
- carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21
- minSpacing (mm)
- Coldbuster In Screed Heater Kit Installation Manual (July 2023), p. 6: mark 100–200 mm from the walls;
- Coldbuster recommends 100 mm. Taken as this cable's manual: it does not name SCK0765L
- depthFromBottom (mm)
- bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top

- selected zone boundary as stored (sample room rectangle = existing internal surface). Intended trade datum is the finished wall face; that conversion is not applied.
- XY projection of the drawn path. Modelled, not published cable length.
- Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.
- confirmed product length – modelled spatial route length · Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.
- Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.
- Plan route length is the XY projection (modelled). Spatial route length follows the sampled cable profile (modelled) and drives confirmed product balance only when the whole profile resolves. Product length comes from the referenced brief. Unsupplied cold tails and connections are excluded.
- coverage area / cable length: Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement.
- Pending manufacturer / electrician review. No electrical or compliance approval.
- 1: 150 / 2855 P; 2: 2010 / 2855 P; 3: 2010 / 2750 P; 4: 150 / 2750 P; 5: 150 / 2645 P; 6: 2010 / 2645 P; 7: 2010 / 2540 P; 8: 150 / 2540 P; 9: 150 / 2435 P; 10: 2010 / 2435 P; 11: 2010 / 2330 P; 12: 150 / 2330 P; 13: 150 / 2225 P; 14: 2010 / 2225 P; 15: 2010 / 2000 P; 16: 150 / 2000 P; 17: 150 / 1895 P; 18: 2010 / 1895 P; 19: 2010 / 1790 P; 20: 150 / 1790 P; 21: 150 / 1685 P; 22: 2010 / 1685 P; 23: 2010 / 1580 P; 24: 150 / 1580 P; 25: 150 / 1475 P; 26: 2010 / 1475 P; 27: 2010 / 1370 P; 28: 150 / 1370 P; 29: 150 / 1265 P;

- 2010 / 1265 P; 31: 2010 / 1160 P; 32: 150 / 1160 P; 33: 150 / 1068 P; 34: 982 / 1068 P; 35: 982 / 980 P; 36: 150 / 980 P; 37: 150 / 892 P; 38: 982 / 892 P; 39: 982 / 804 P; 40: 150 / 804 P; 41: 150 / 716 P; 42: 982 / 716 P; 43: 982 / 628 P; 44: 150 / 628 P; 45: 150 / 540 P; 46: 982 / 540 P; 47: 982 / 452 P; 48: 150 / 452 P; 49: 150 / 364 P; 50: 982 / 364 P; 51: 982 / 276 P; 52: 150 / 276 P; 53: 150 / 188 P; 54: 982 / 188 P; 55: 982 / 100 P; 56: 149 / 100 P
- cable level at 169 sampled points along plan route (mm)
- plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness, plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level)
- Owner, 7 Oct 2026: floor under the bath left unheated so the heated area stays within the 5.1 m² the 42.5 m cable covers
- heating_signoff, heating_product_unresolved, heating_product_unresolved, heating_metadata_unknown, heating_route_length_unknown, heating_coverage_range, heating_ip_location, heating_depth_unknown, finished level at waste (mm)
- Lauxes Next Gen 35 Custom 1000, brushed nickel
- Kano 316 Tile Insert Waste 120×120, brushed nickel


Unresolved in this view (16)

- Bathroom: proposed heating cable: heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-sck0765L-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.

- Bathroom: proposed heating cable: heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- Bathroom: proposed heating cable: heating_coverage_range: Zone area excluding entered keep-outs 5.3257 m² (availableArea, same resolver as evidence: not a laid-cable heat-coverage model) is outside the brief coverage range 3.7–5.1 m² (published, project-snapshot (unresolved), carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum).
- Bathroom: proposed heating cable: heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.

- Bathroom: proposed heating cable: heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.
- Bathroom: proposed heating cable: manufacturer unknown; printed as "?" (missing manufacturer).
- Bathroom: proposed heating cable: minSpacing (mm) unknown; printed as "?" (missing minSpacing (mm)).
- Bathroom: proposed heating cable: depthFromBottom (mm) unknown; printed as "?" (missing depthFromBottom (mm)).
- Bathroom: proposed heating cable: spatial route length, sampled profile (m) unknown; printed as "?" (missing Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.).
- Bathroom: proposed heating cable: remaining confirmed product length (m) unknown; printed as "?" (missing Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.).

- Bathroom: proposed heating cable: cable level at 169 sampled points along plan route (mm) unknown; printed as "?" (missing plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness, plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).

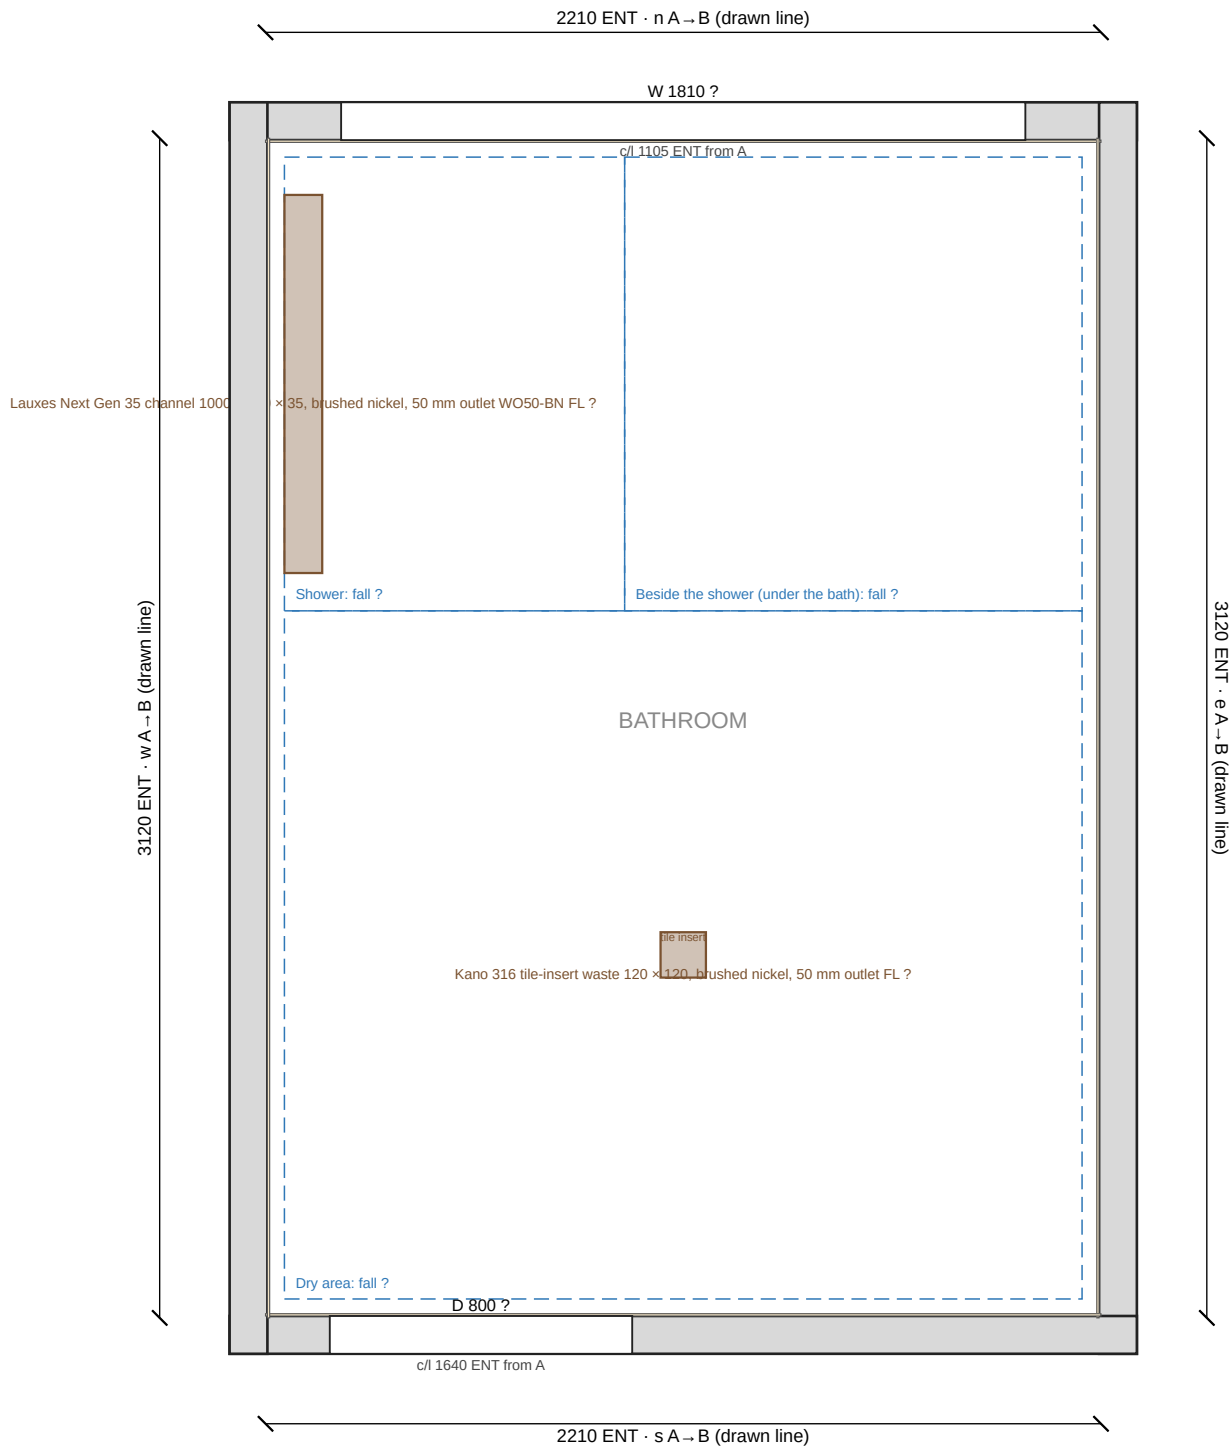

Stage: 6. Screed and falls

Shows 19 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (10)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
 - Bathroom: Shower: fall (mm per m) unknown; printed as "?" (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level).
- ... 2 more: see the specification sheet

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)


Stage diagram: 6. Screed and falls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

0 1 m
Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

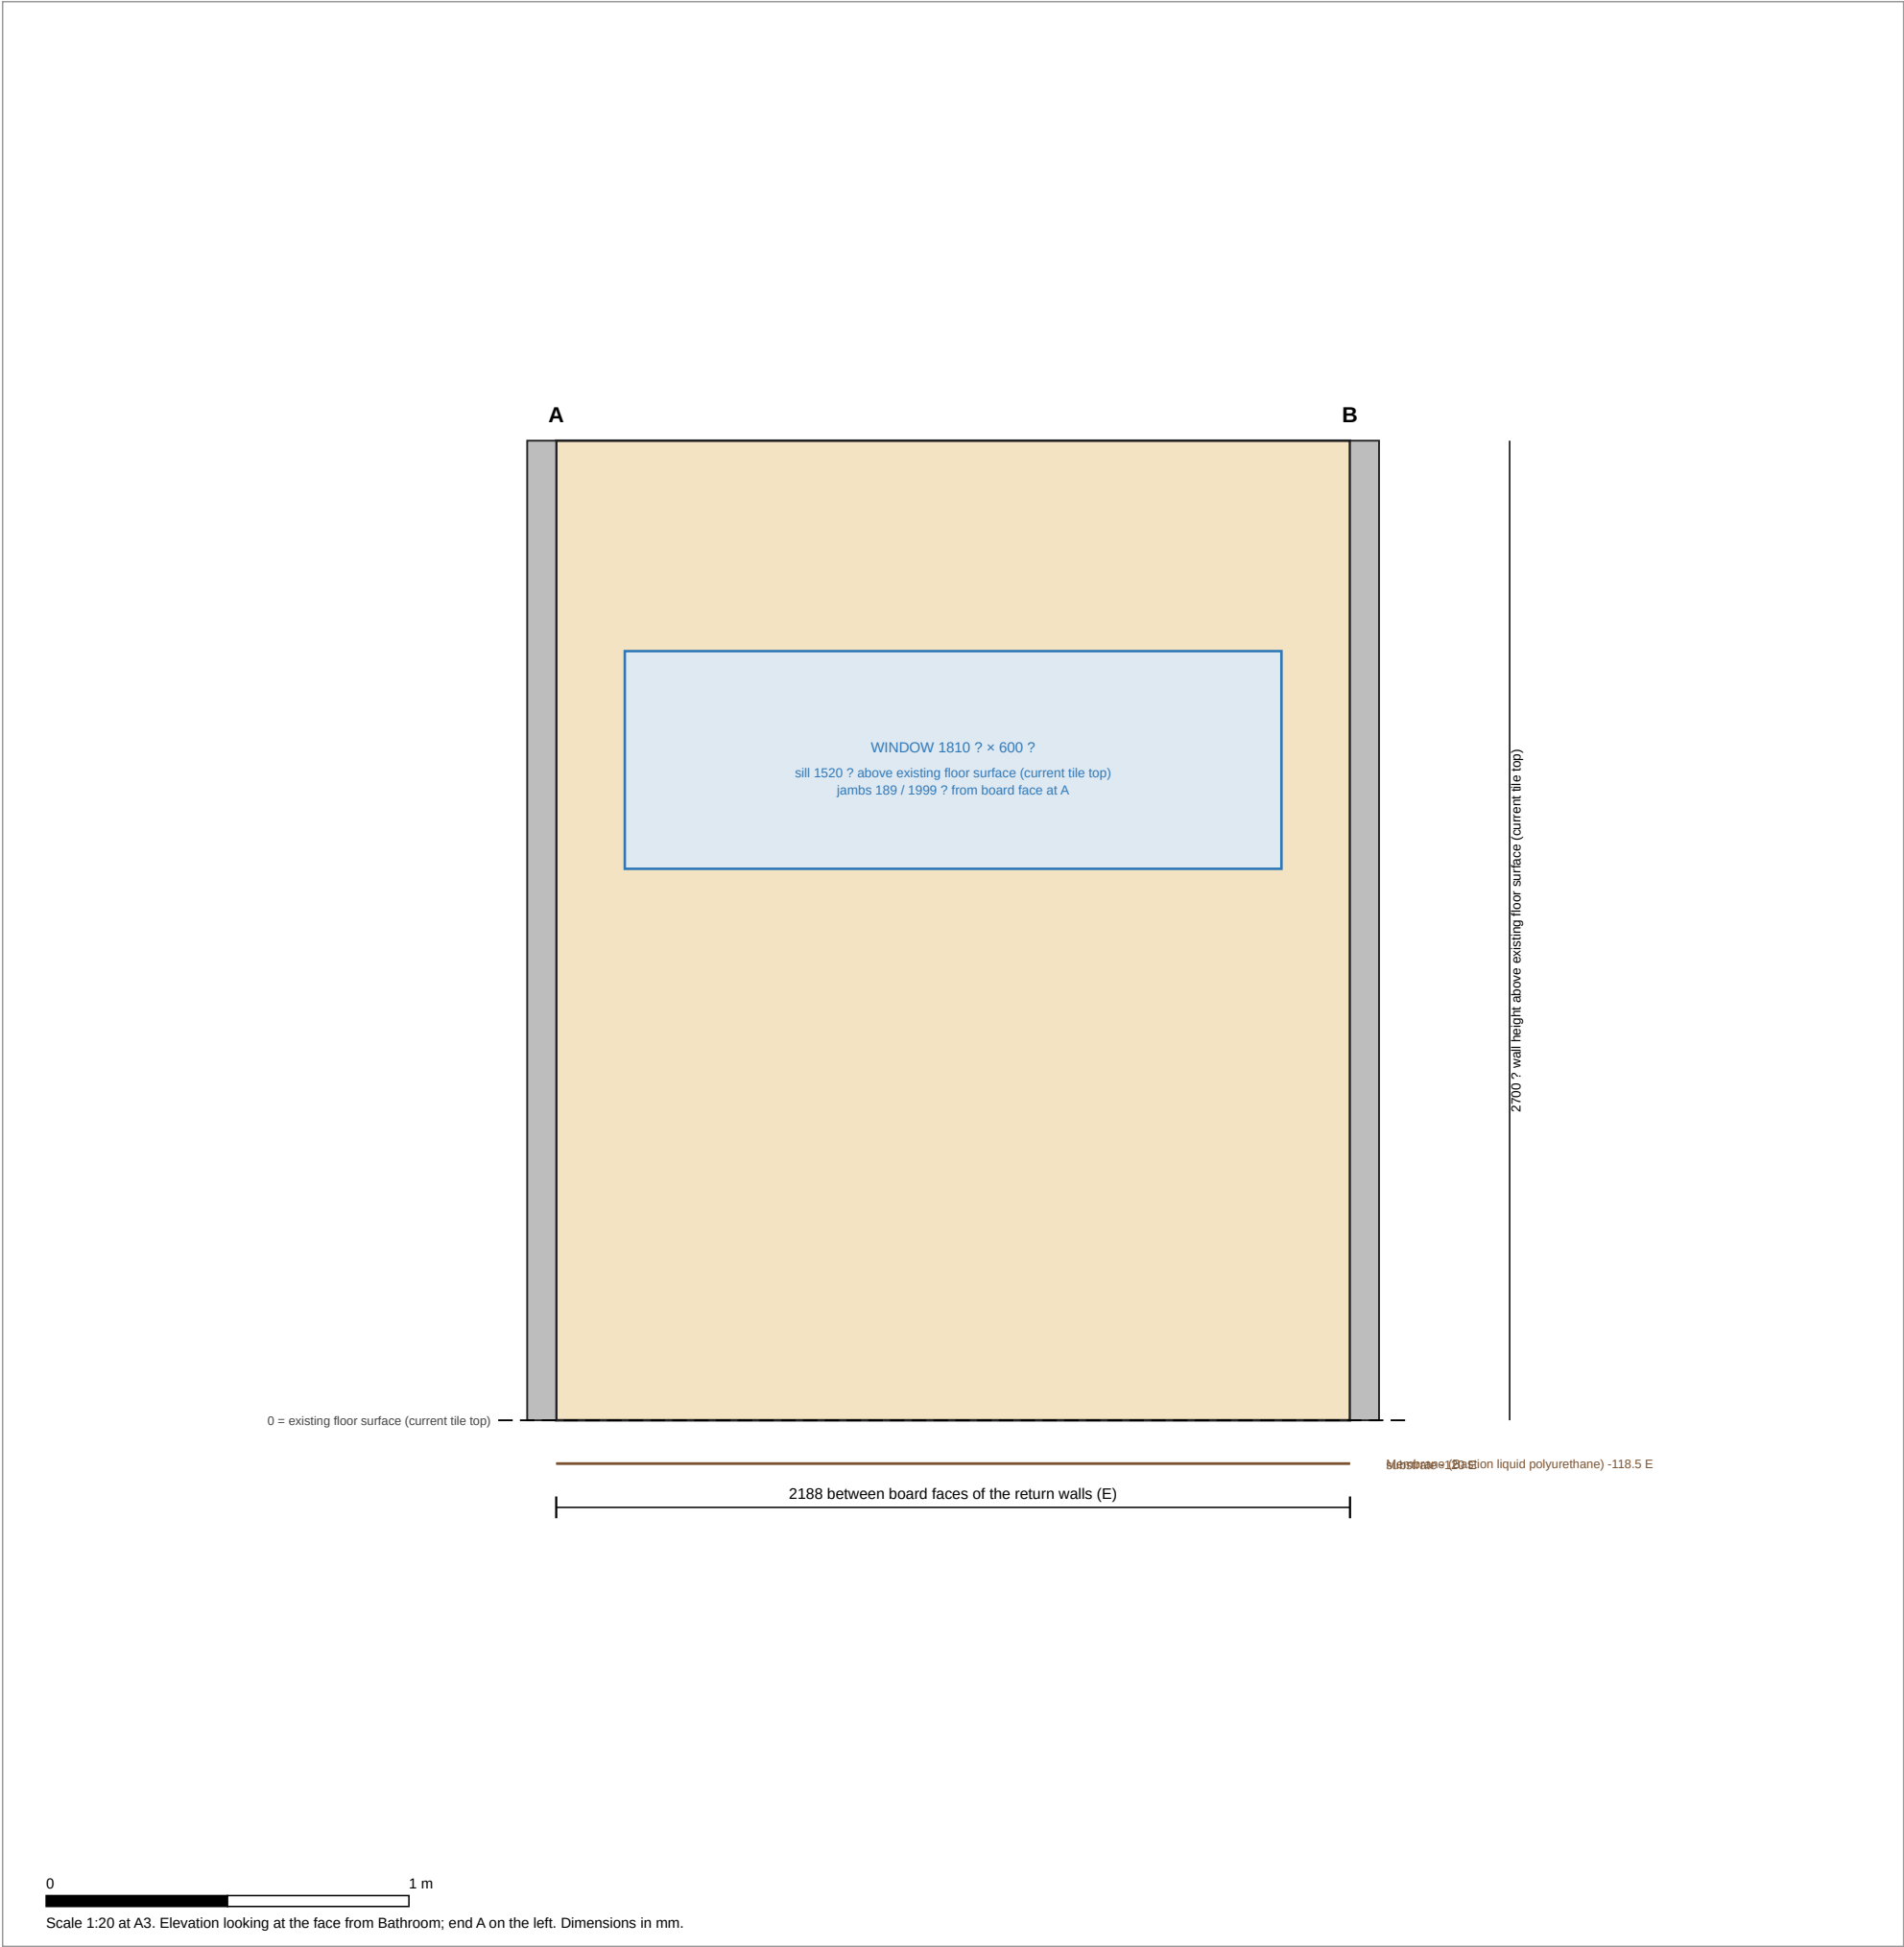

Stage: 6. Screed and falls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_w (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_e (right side) at 2199 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 6. Screed and falls


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_n (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_s (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

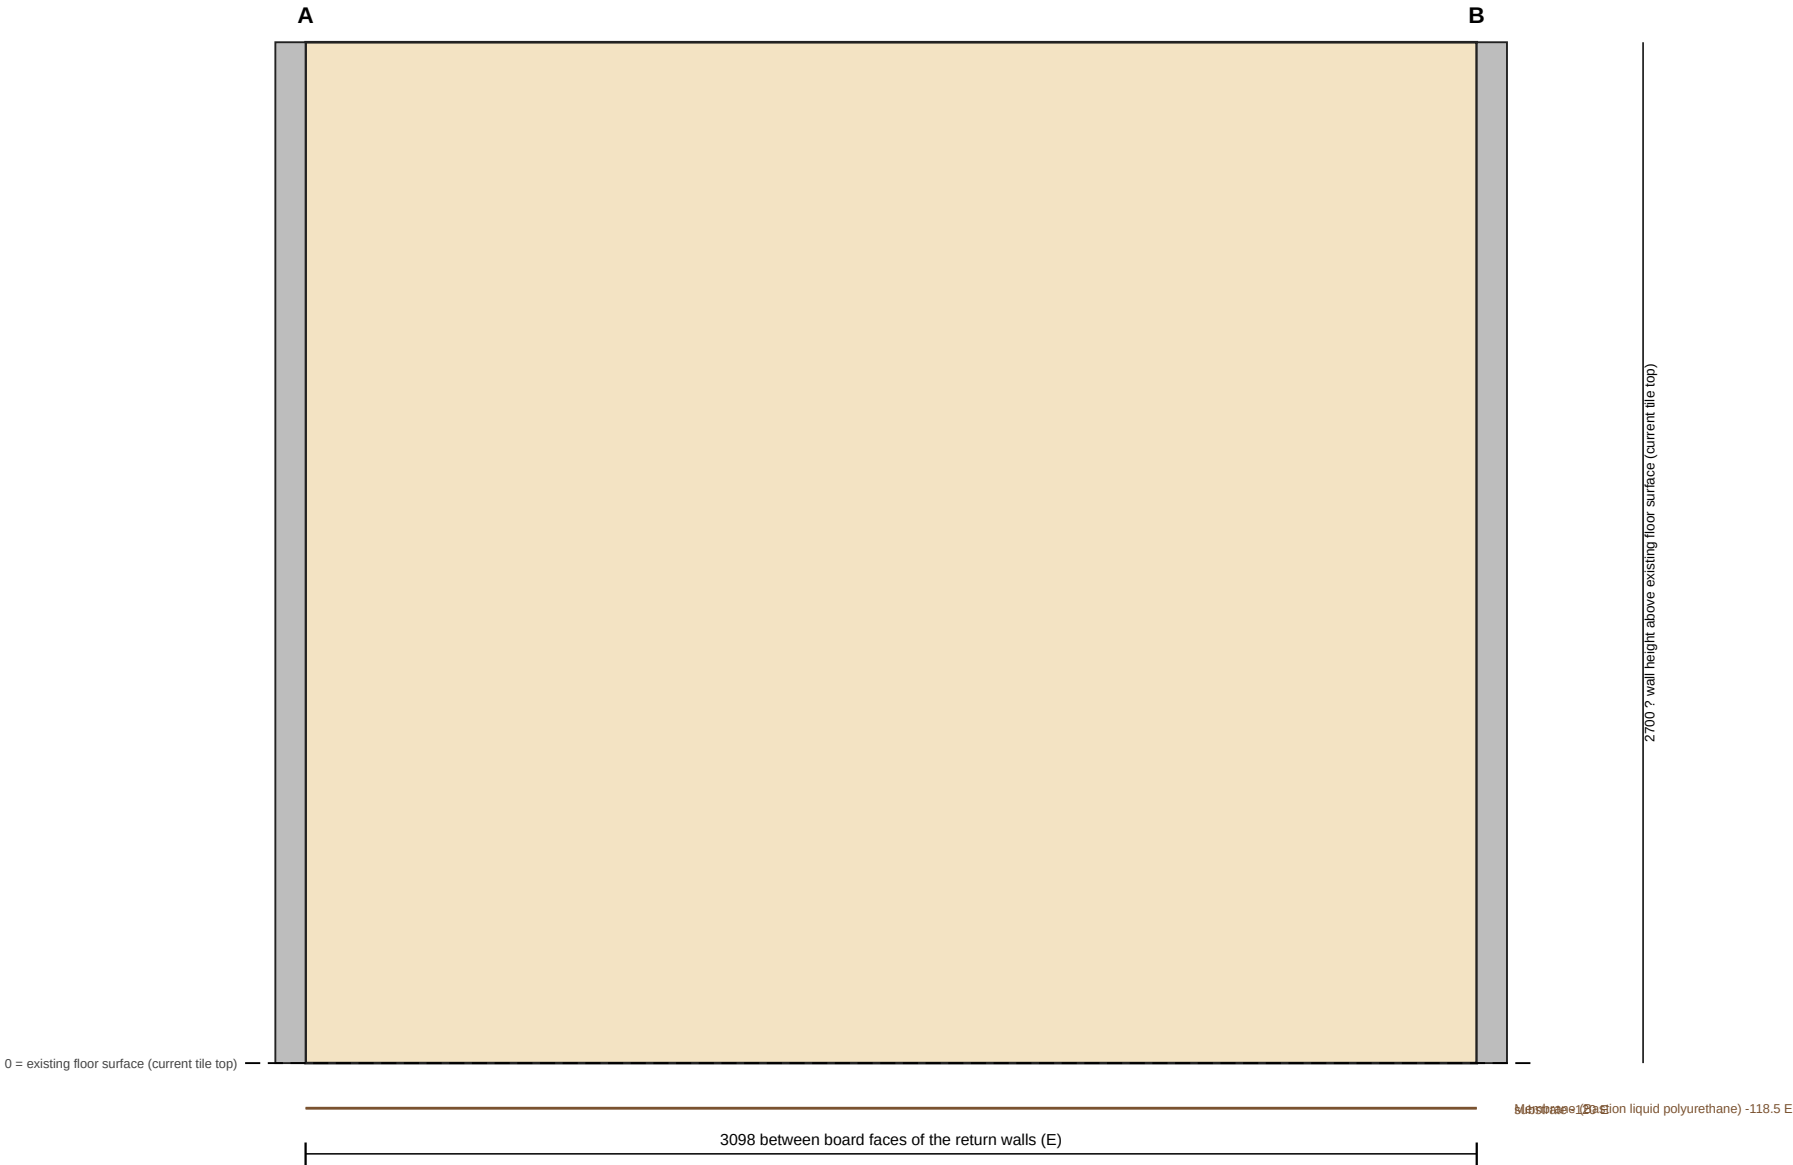


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE



Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

Stage: 6. Screed and falls


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: board face (Villaboard 6 mm), 11 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
End A: Board face (Villaboard 6 mm) of wall_s (right side) at 11 E along the drawn line.
End B: Board face (Villaboard 6 mm) of wall_n (right side) at 3109 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Membrane (Bastion liquid polyurethane) top -118.5 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)

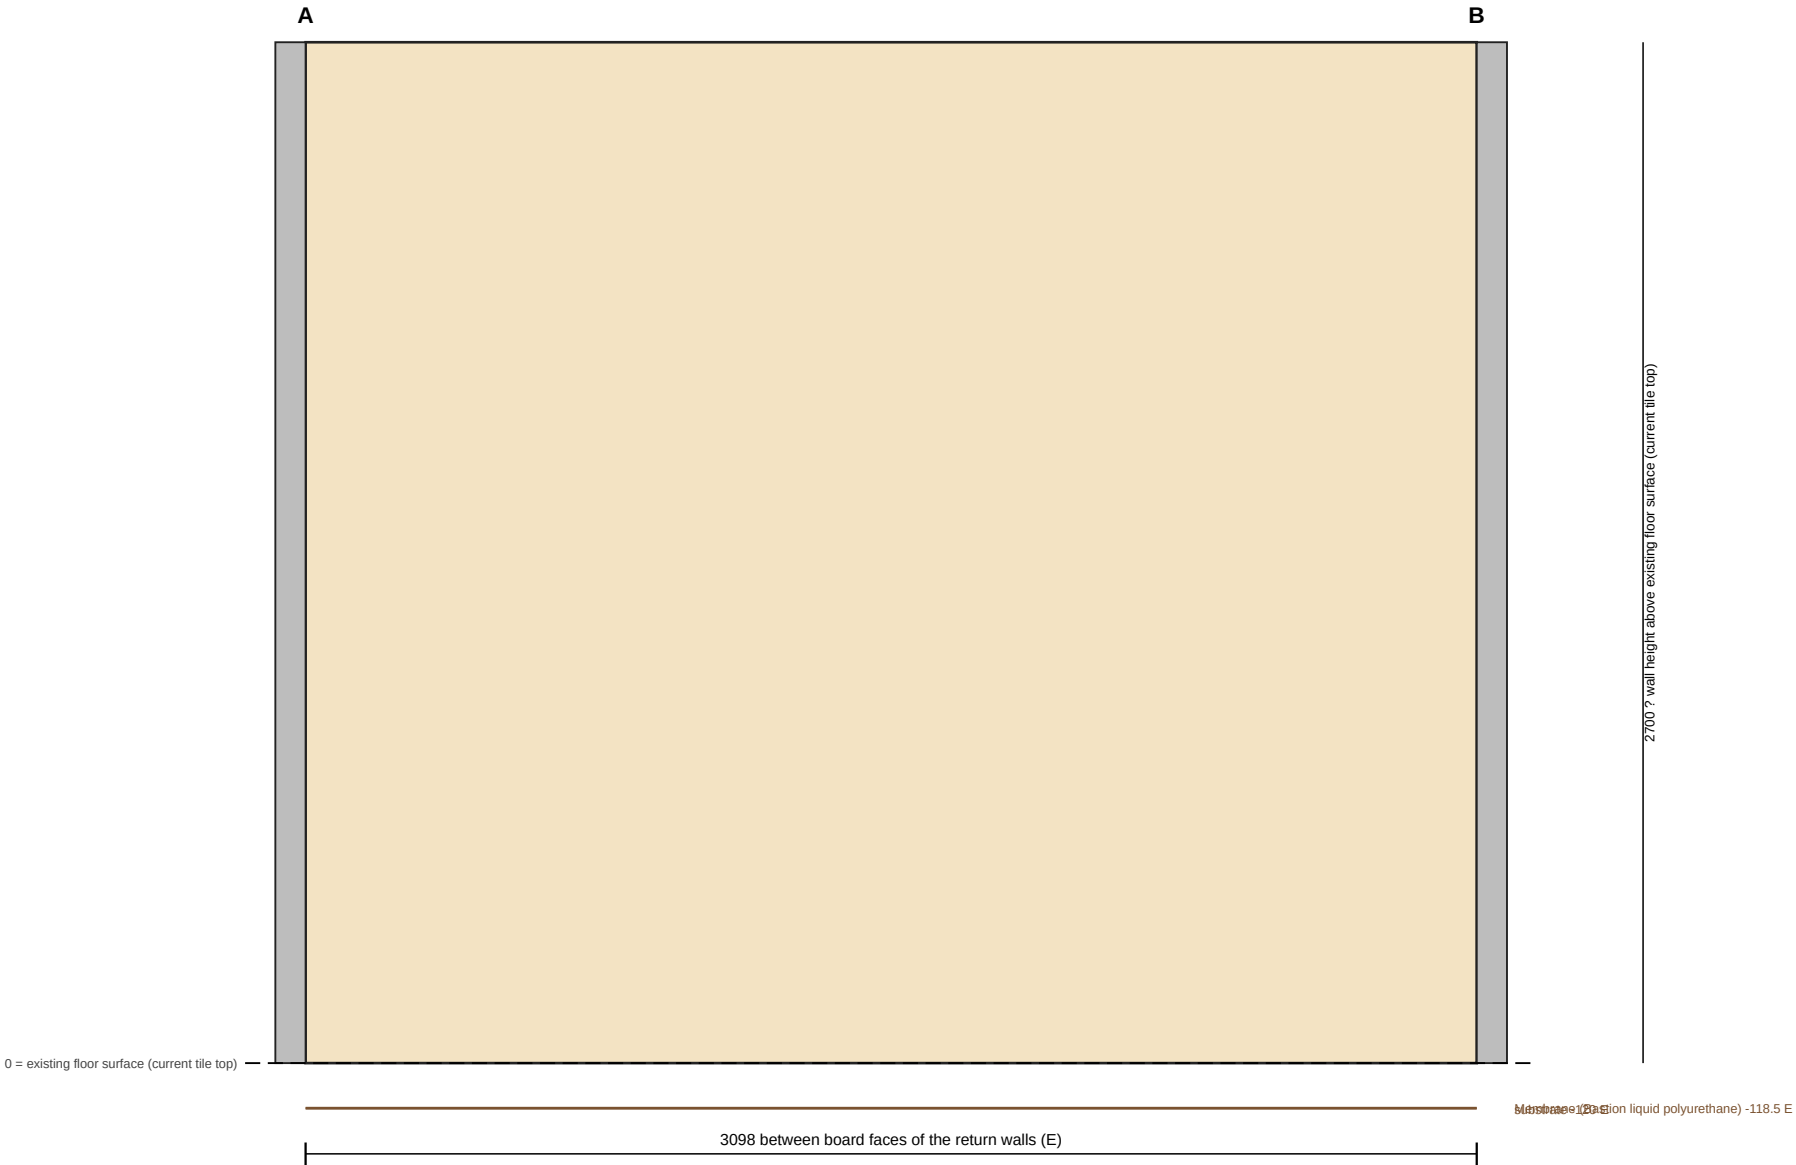

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 6. Screed and falls · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 6. Screed and falls

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 19 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall board (e.g. Villaboard)						
Wall n right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_n, toward right side		
Wall e right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_e, toward right side		
Wall s right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_s, toward right side		
Wall w right: Villaboard 6 mm	kind	board	ENT entered			


Element	Property	Value	Status	Measured from	Source	Missing
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor waterproofing						
Bathroom floor: Membrane (Bastion liquid polyurethane)	kind	waterproofing	ENT entered			
	thickness (mm)	1.5	E estimated		owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm	
	top level (mm)	-118.5	E estimated	existing floor surface (current tile top)		
Floor screed						
Bathroom floor: Tiler's screed (heating cable inside)	kind	screed	ENT entered			
	thickness (mm)	?	? unknown			thickness (mm)
	top level (mm)	?	? unknown	existing floor surface (current tile top)		Tiler's screed (heating cable inside) thickness
Floor wastes						
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			

Element	Property	Value	Status	Measured from	Source	Missing
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)
Floor planes and falls						
Bathroom: Shower	fall (mm per m)	?	? unknown			Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level
Bathroom: Beside the shower (under the bath)	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level
Bathroom: Dry area	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level

Unresolved in this view (10)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Bathroom: Shower: fall (mm per m) unknown; printed as "?" (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level).
- Bathroom: Beside the shower (under the bath): fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).

- Bathroom: Dry area: fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).

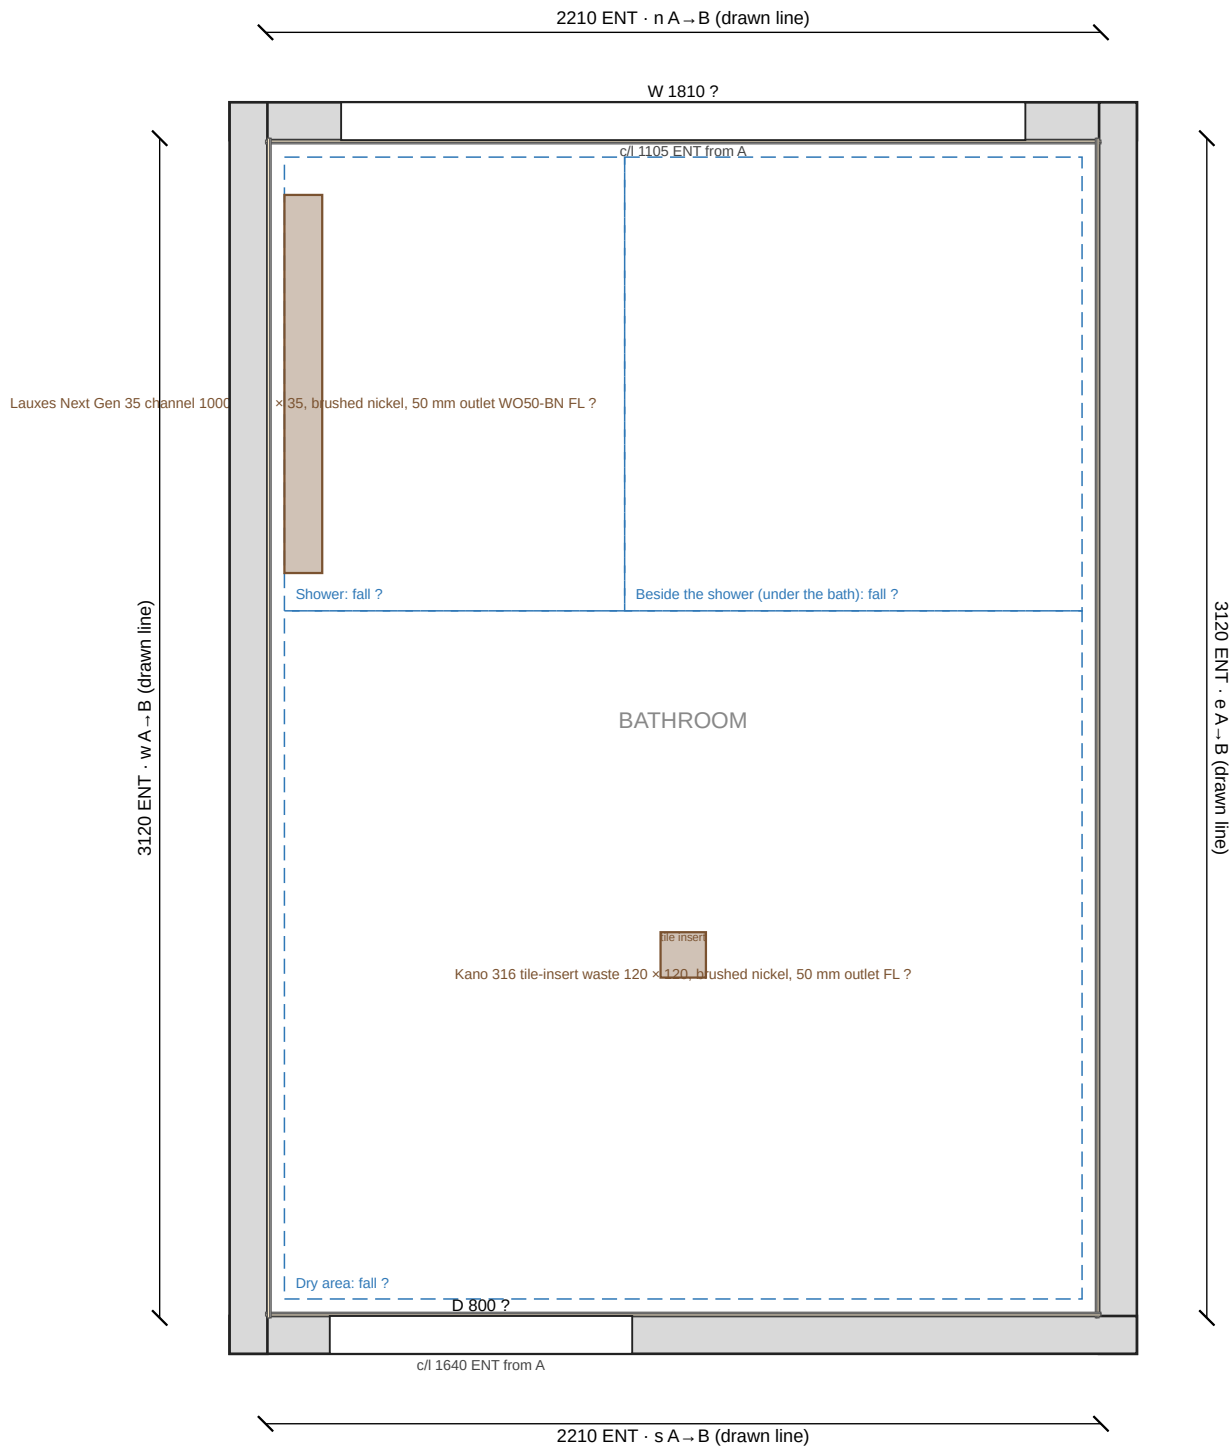

Stage: 7. Tile adhesive, floor and walls

Shows 23 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall n right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?
Bathroom floor: Tiler's adhesive: thickness ? · top level -10 E

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
 - Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
 - Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- ... 3 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 7. Tile adhesive, floor and walls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

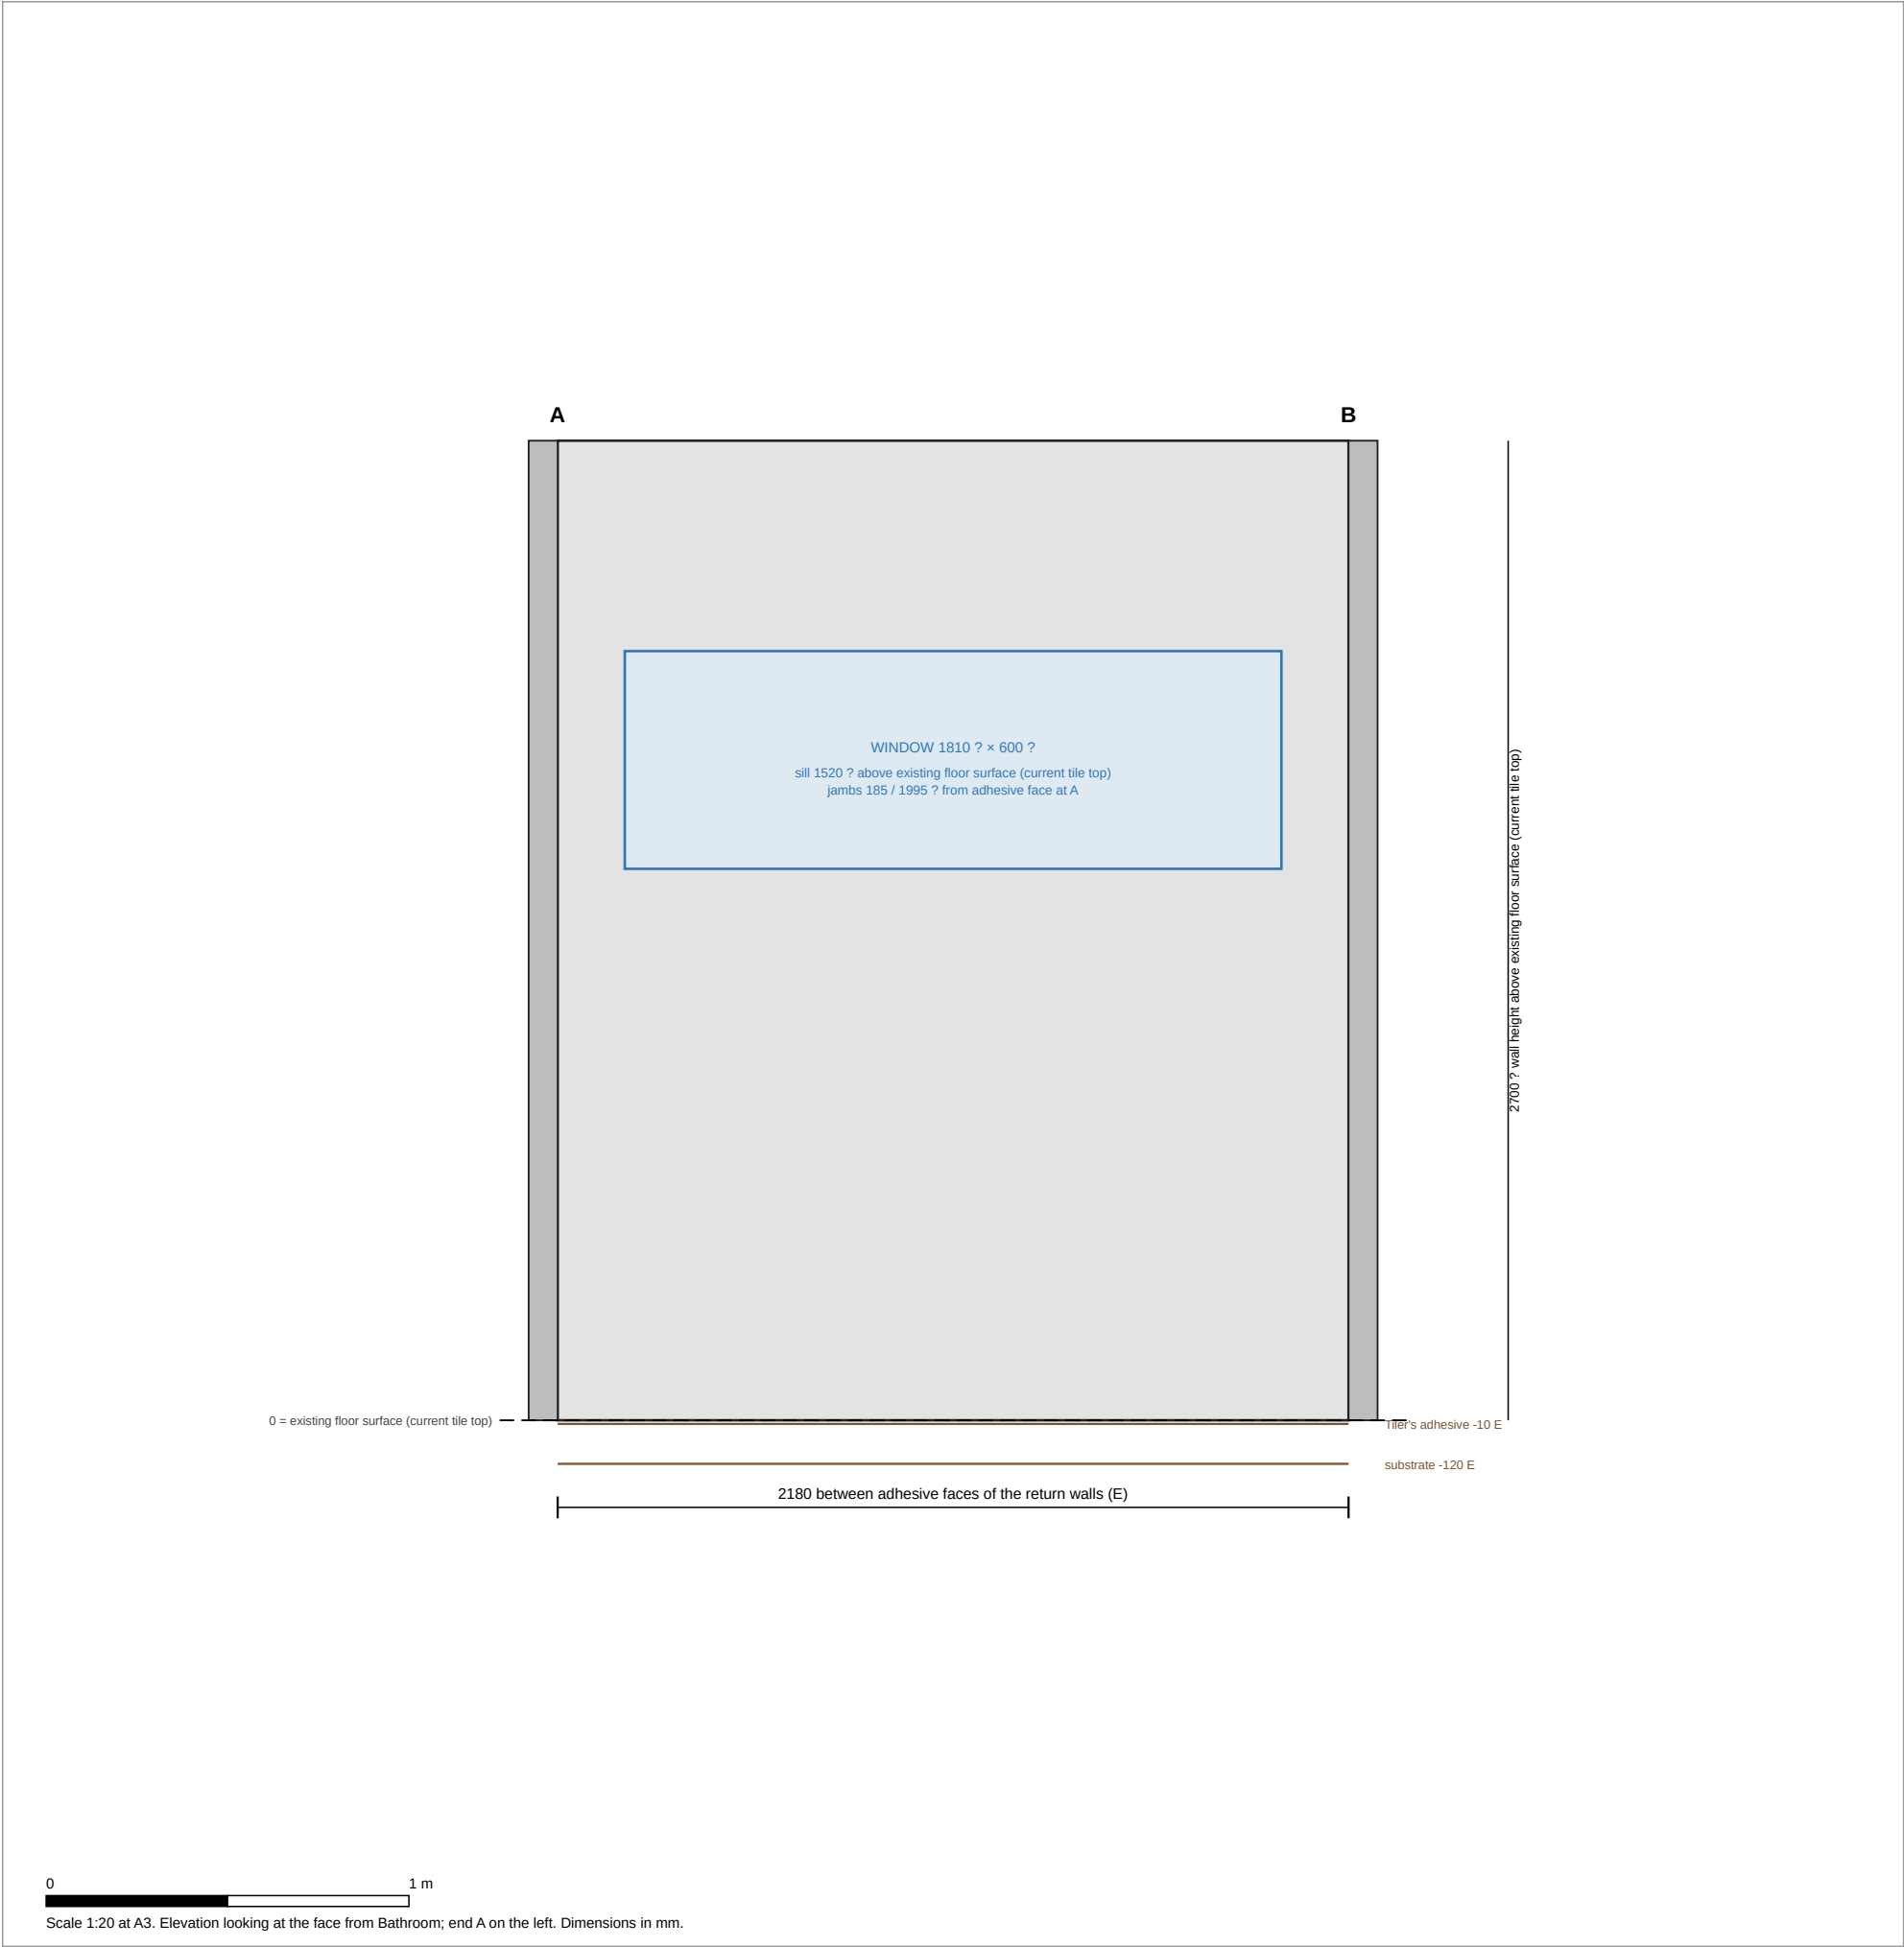

Stage: 7. Tile adhesive, floor and walls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_w (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_e (right side) at 2195 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 7. Tile adhesive, floor and walls

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_n (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_s (right side) at 3105 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)




0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

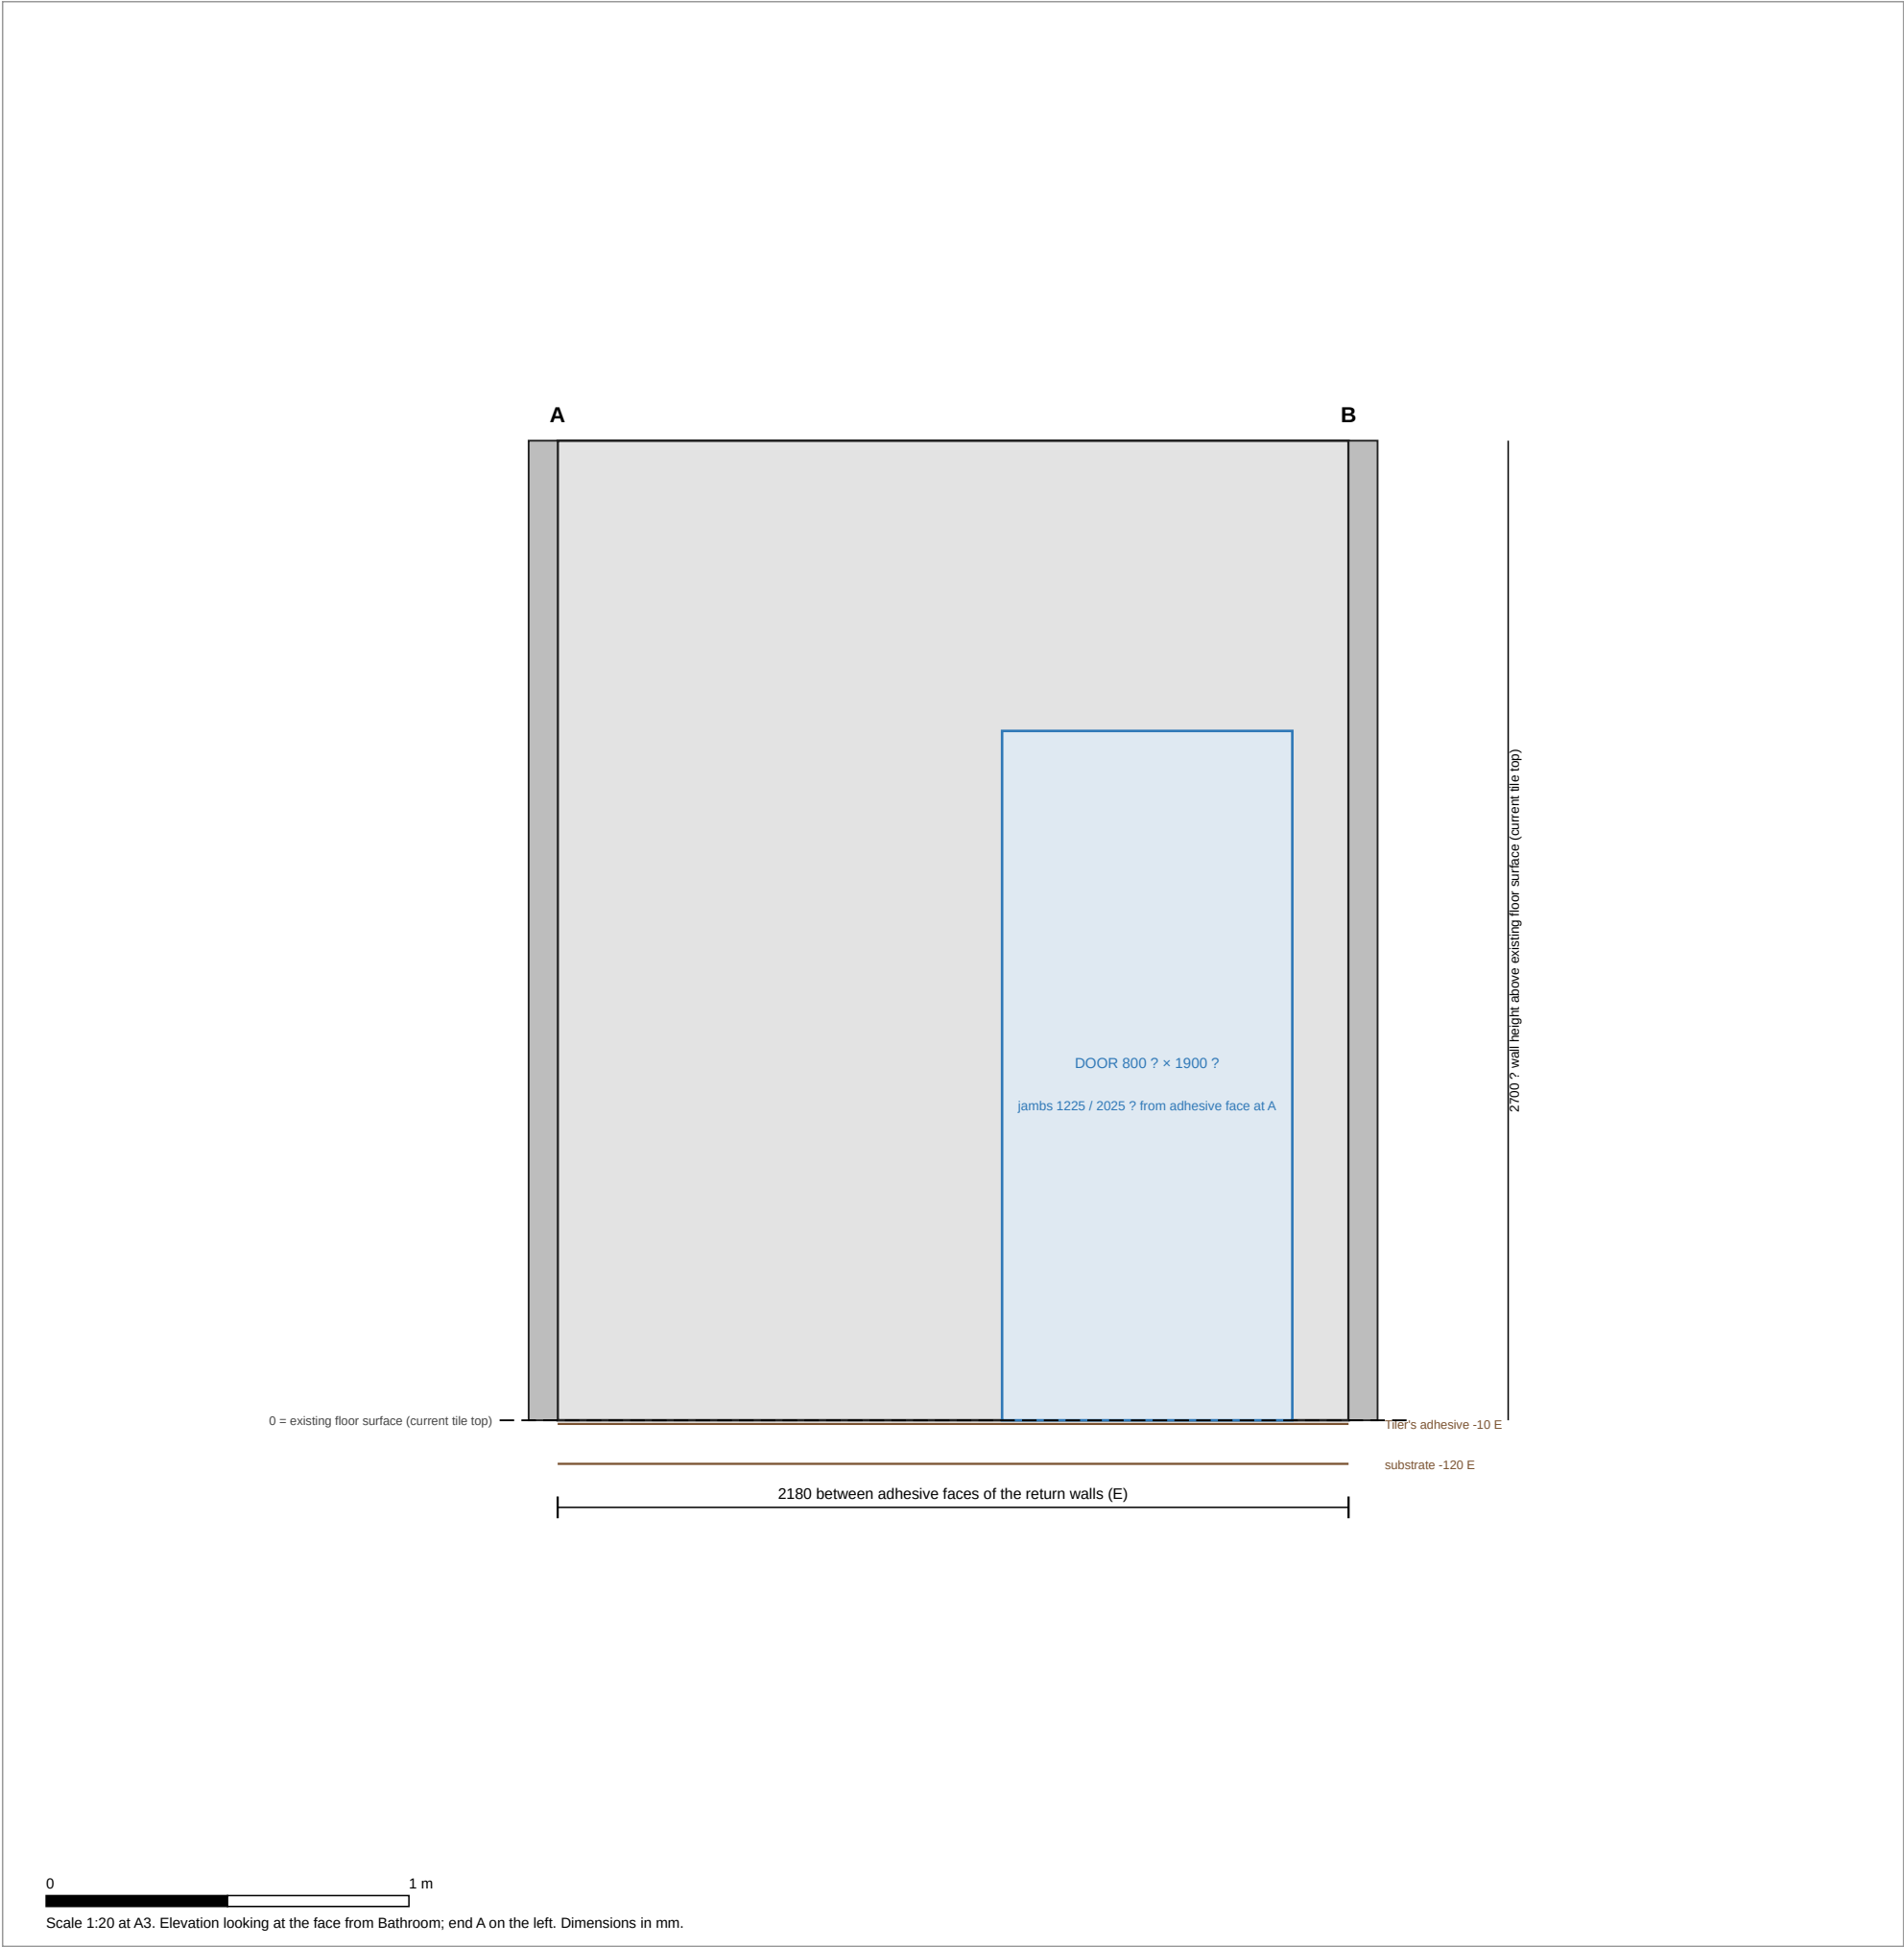

Stage: 7. Tile adhesive, floor and walls

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_e (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_w (right side) at 2195 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall_w_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 7. Tile adhesive, floor and walls

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: adhesive face (Tile adhesive (tiler's)), 15 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
End A: Tile adhesive face (Tile adhesive (tiler's)) of wall_s (right side) at 15 E along the drawn line.
End B: Tile adhesive face (Tile adhesive (tiler's)) of wall_n (right side) at 3105 E along the drawn line.

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)



0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 7. Tile adhesive, floor and walls · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 7. Tile adhesive, floor and walls

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 23 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall board (e.g. Villaboard)						
Wall n right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_n, toward right side		
Wall e right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_e, toward right side		
Wall s right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_s, toward right side		
Wall w right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	


Element	Property	Value	Status	Measured from	Source	Missing
	outer face position (mm)	11	E estimated	drawn line of wall_w, toward right side		
Wall tile adhesive						
Wall n right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_n, toward right side		
Wall e right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_e, toward right side		
Wall s right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_s, toward right side		
Wall w right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	

Element	Property	Value	Status	Measured from	Source	Missing
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor screed						
Bathroom floor: Tiler's screed (heating cable inside)	kind	screed	ENT entered			
	thickness (mm)	?	? unknown			thickness (mm)
	top level (mm)	?	? unknown	existing floor surface (current tile top)		Tiler's screed (heating cable inside) thickness
Floor tile adhesive						
Bathroom floor: Tiler's adhesive	kind	adhesive	ENT entered			
	thickness (mm)	?	? unknown			thickness (mm)
	top level (mm)	-10	E estimated	existing floor surface (current tile top), read down from the finished-level target		
Floor wastes						
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	

Element	Property	Value	Status	Measured from	Source	Missing
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)
Floor planes and falls						
Bathroom: Shower	fall (mm per m)	?	? unknown			Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level
Bathroom: Beside the shower (under the bath)	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level
Bathroom: Dry area	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
- Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Bathroom: Shower: fall (mm per m) unknown; printed as "?" (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level).
- Bathroom: Beside the shower (under the bath): fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).
- Bathroom: Dry area: fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).

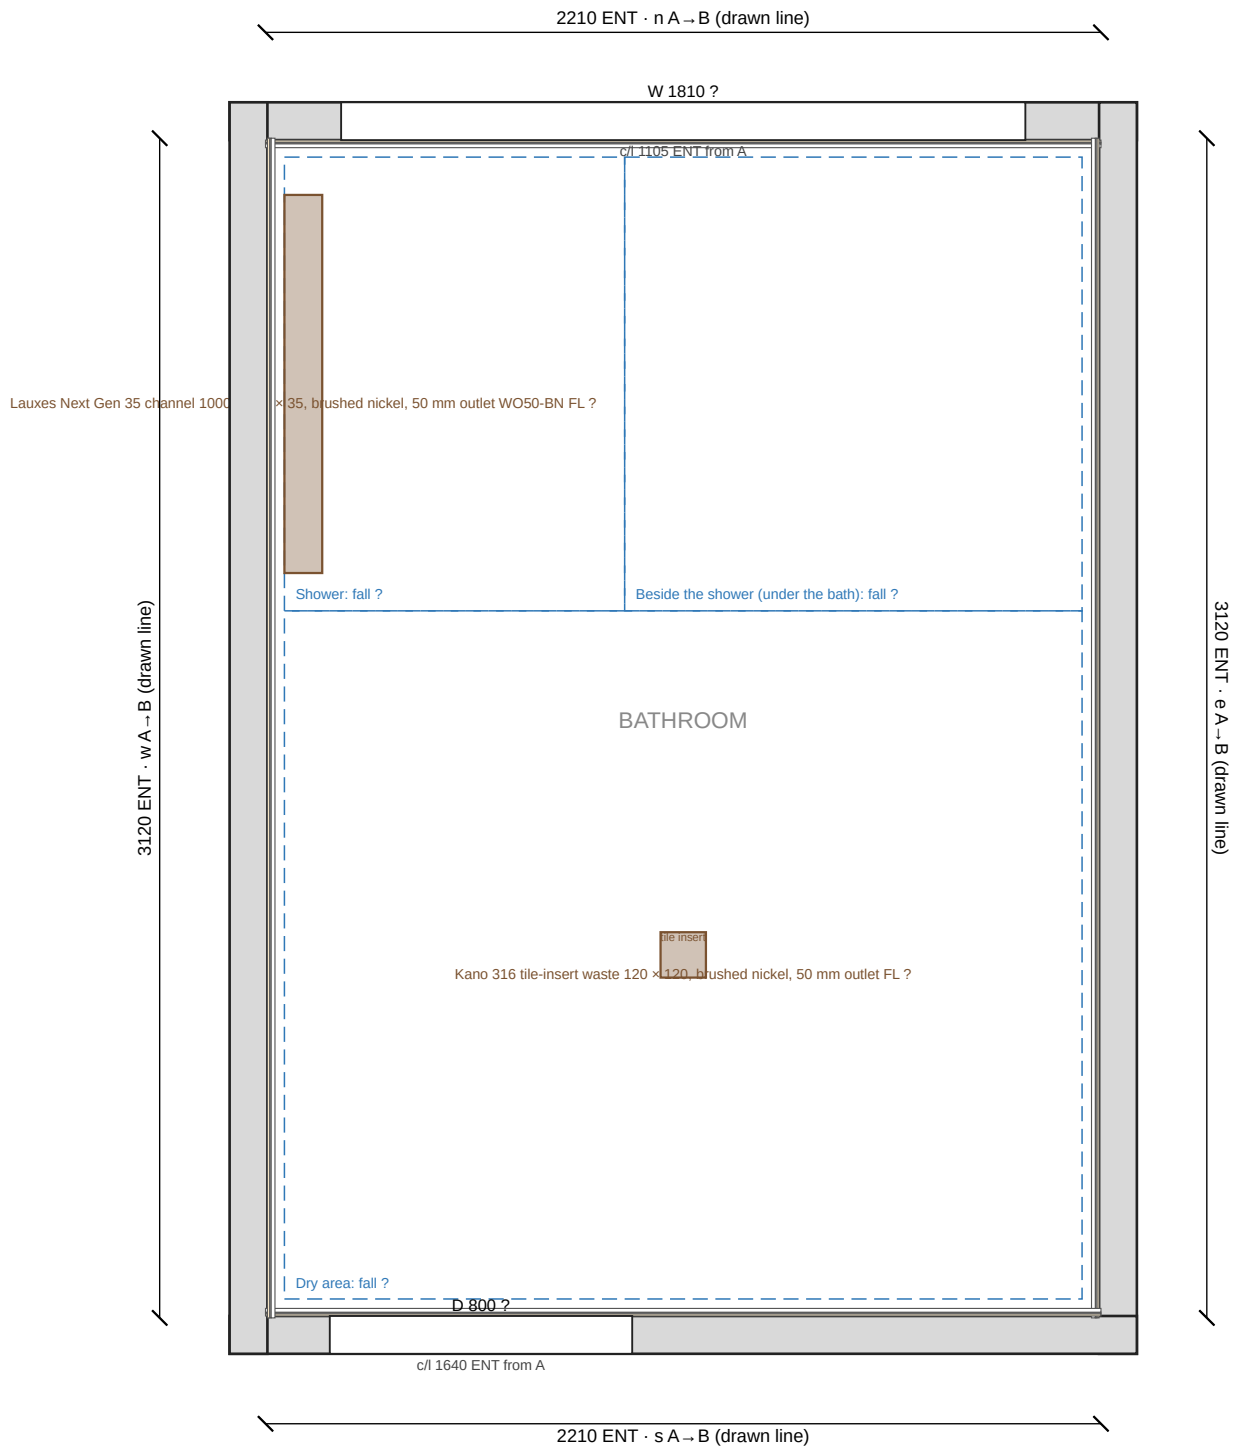

Stage: 8. Tiles laid, floor and walls

Shows 28 element(s) of the one project model; everything else is hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown
Not modelled, never drawn: pipe and cable runs between service points.

Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall n right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall n right: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): thickness 10 E · outer face position 25 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall e right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): thickness 10 E · outer face position 25 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Tile adhesive (tiler's): thickness 4 E · outer face position 15 E
Wall s right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): thickness 10 E · outer face position 25 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
... 2 more: see the specification sheet

Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Tiler's screed (heating cable inside): thickness ? · top level ?
Bathroom floor: Tiler's adhesive: thickness ? · top level -10 E
Bathroom floor: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): thickness 10 E · top level 0 P

Drainage

Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate length 1000 M · grate width 100 M · outlet diameter 50 M · body depth below grate 35 M · outlet position ?
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate type tile-insert NAM · grate length 120 M · grate width 120 M · outlet diameter 50 M · body depth below grate ? · outlet position ?
Bathroom: Shower: fall (mm per m) ?
Bathroom: Beside the shower (under the bath): fall (mm per m) ?
... 1 more: see the specification sheet

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
- Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).

... 3 more: see the specification sheet

Project: Bathroom Concept


Site / room: Bathroom (no site address recorded)

Stage diagram: 8. Tiles laid, floor and walls

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

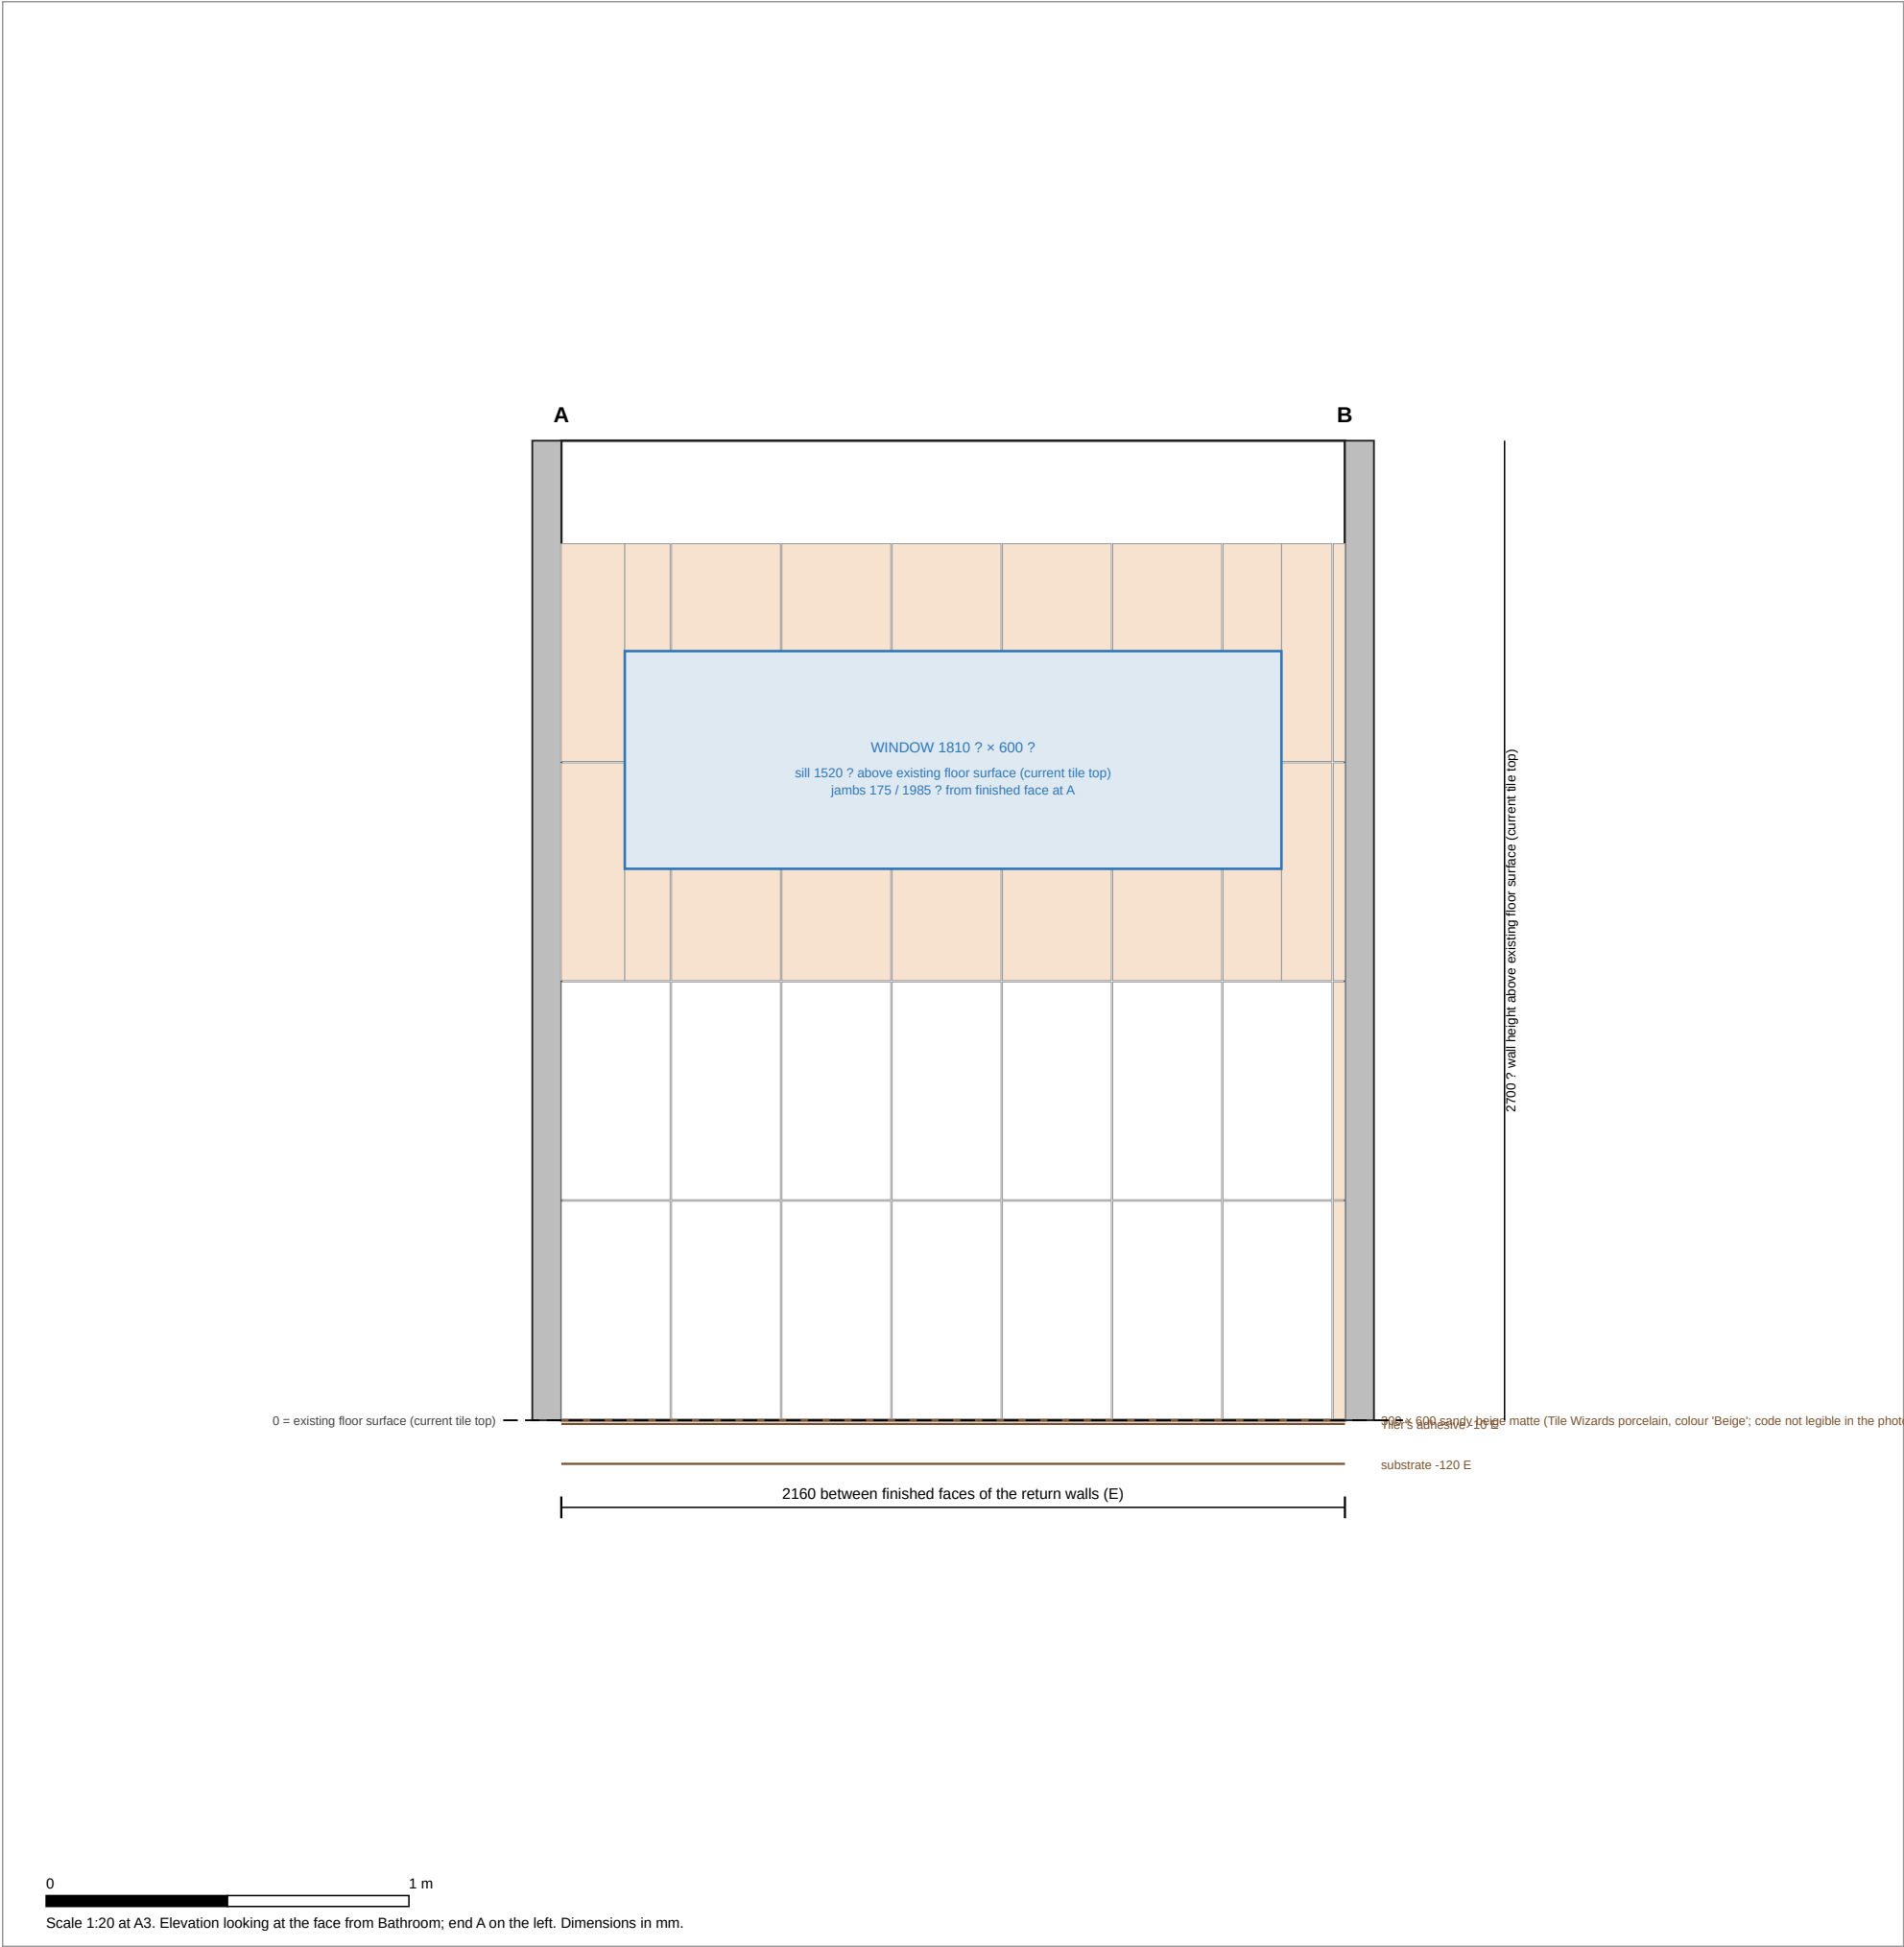

Stage: 8. Tiles laid, floor and walls

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_w (right side) at 25 E along the drawn line.
End B: Finished face of wall_e (right side) at 2185 E along the drawn line.
Proposed tile set-out: 8 columns × 4 courses, 22 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall wall_n, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 8. Tiles laid, floor and walls


Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_n (right side) at 25 E along the drawn line.
End B: Finished face of wall_s (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

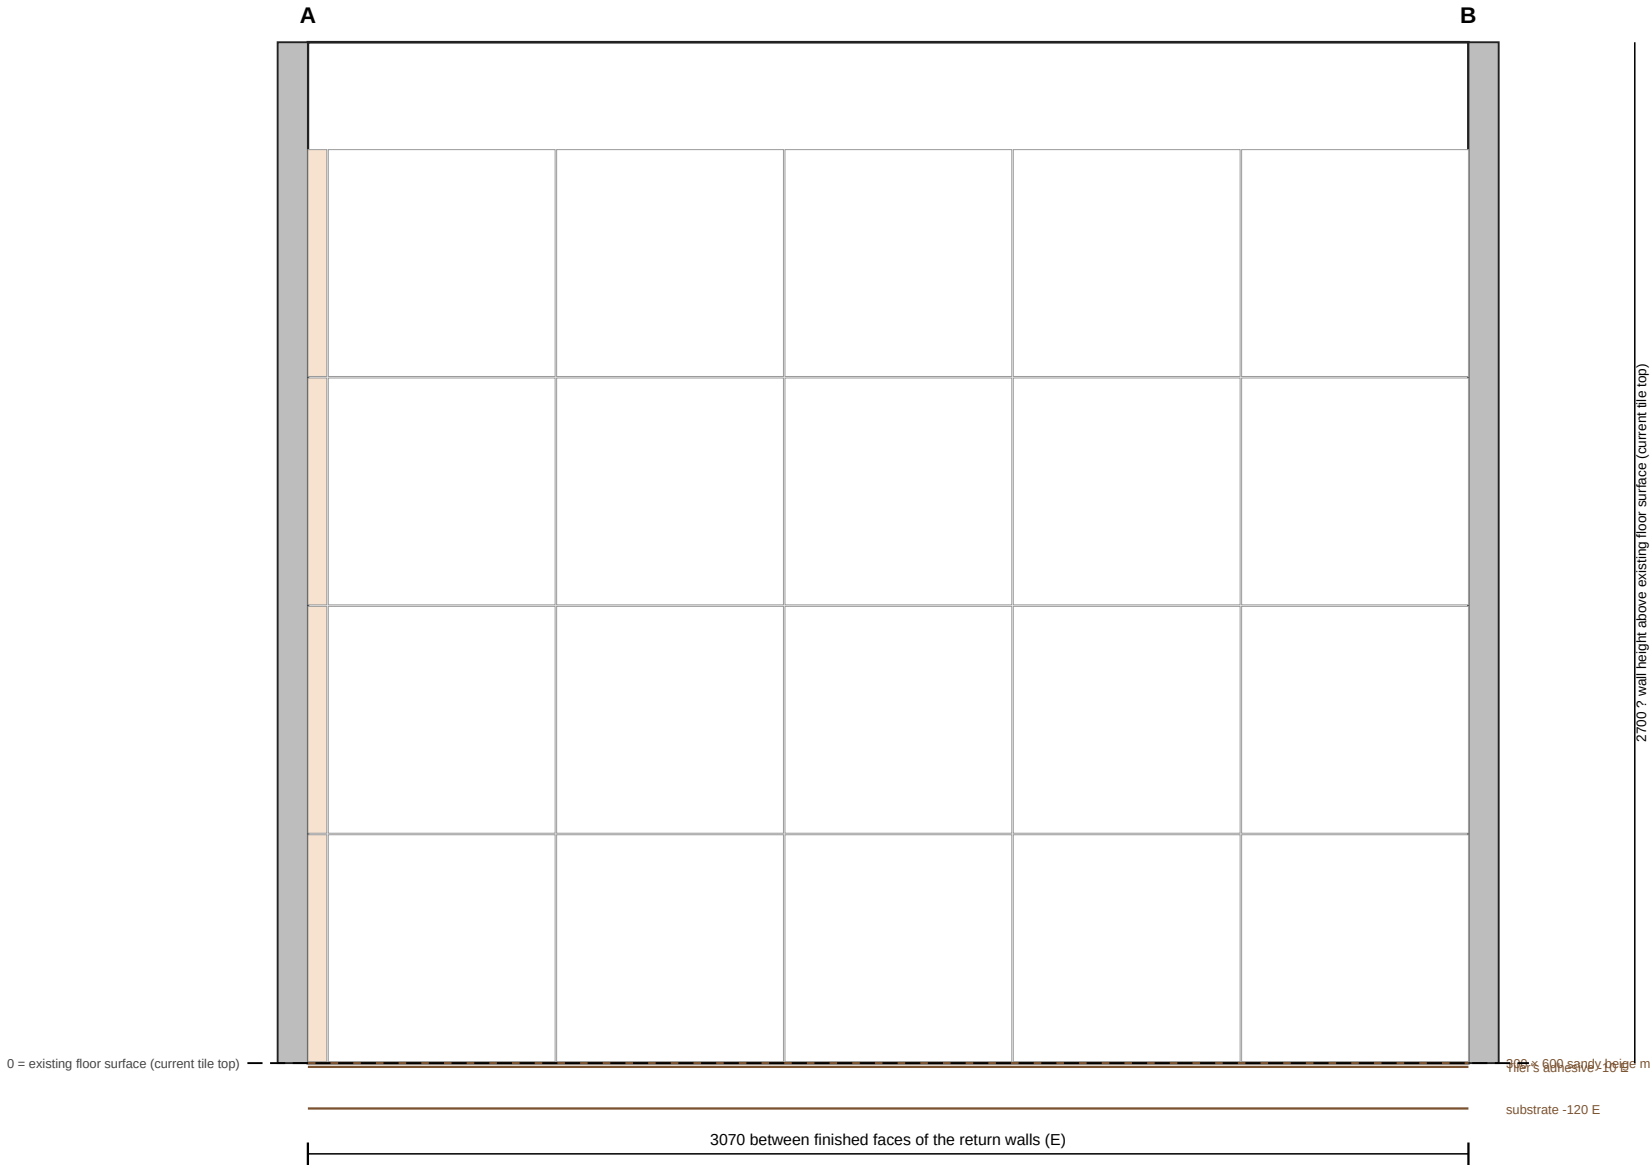


0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

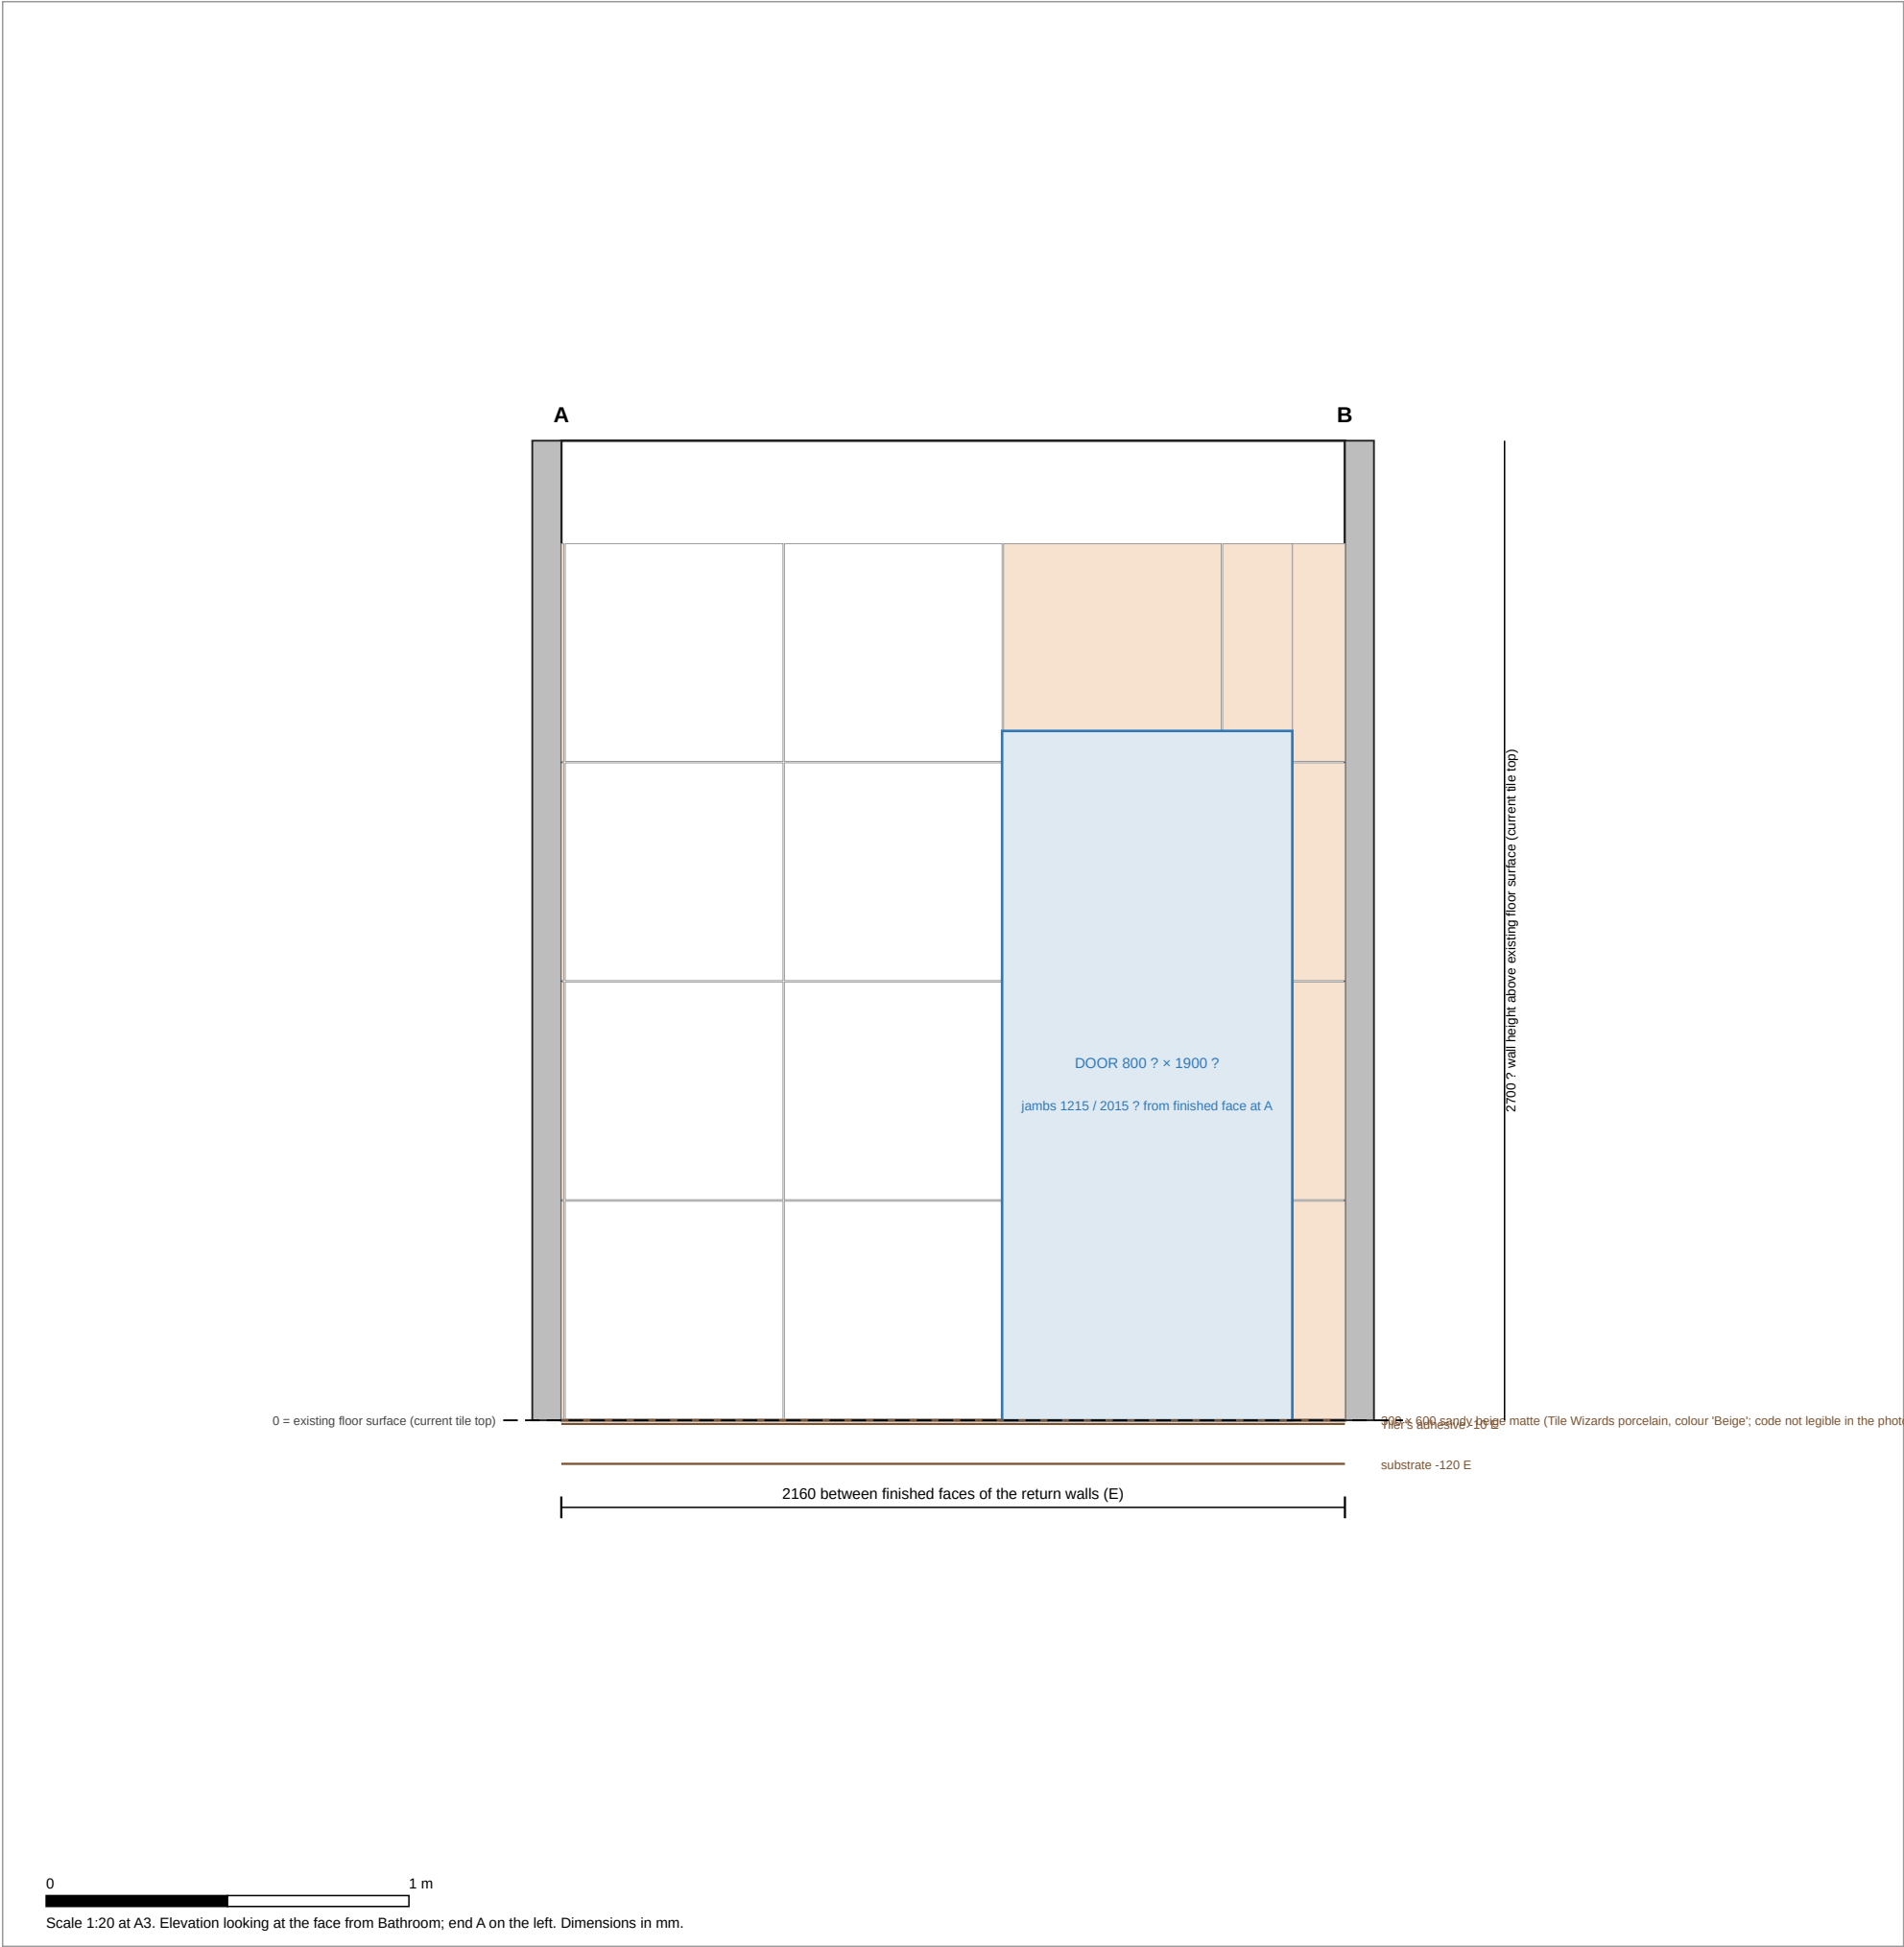

Stage: 8. Tiles laid, floor and walls

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_e (right side) at 25 E along the drawn line.
End B: Finished face of wall_w (right side) at 2185 E along the drawn line.
Proposed tile set-out: 5 columns × 4 courses, 10 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall_w_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Stage: 8. Tiles laid, floor and walls


Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
Villaboard 6 mm: 6 P. Extent on the face is not modelled; drawn over the full face.
Tile adhesive (tiler's): 4 E. Extent on the face is not modelled; drawn over the full face.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_s (right side) at 25 E along the drawn line.
End B: Finished face of wall_n (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
Tiler's screed (heating cable inside) top: ? (Tiler's screed (heating cable inside) thickness)
Tiler's adhesive top -10 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

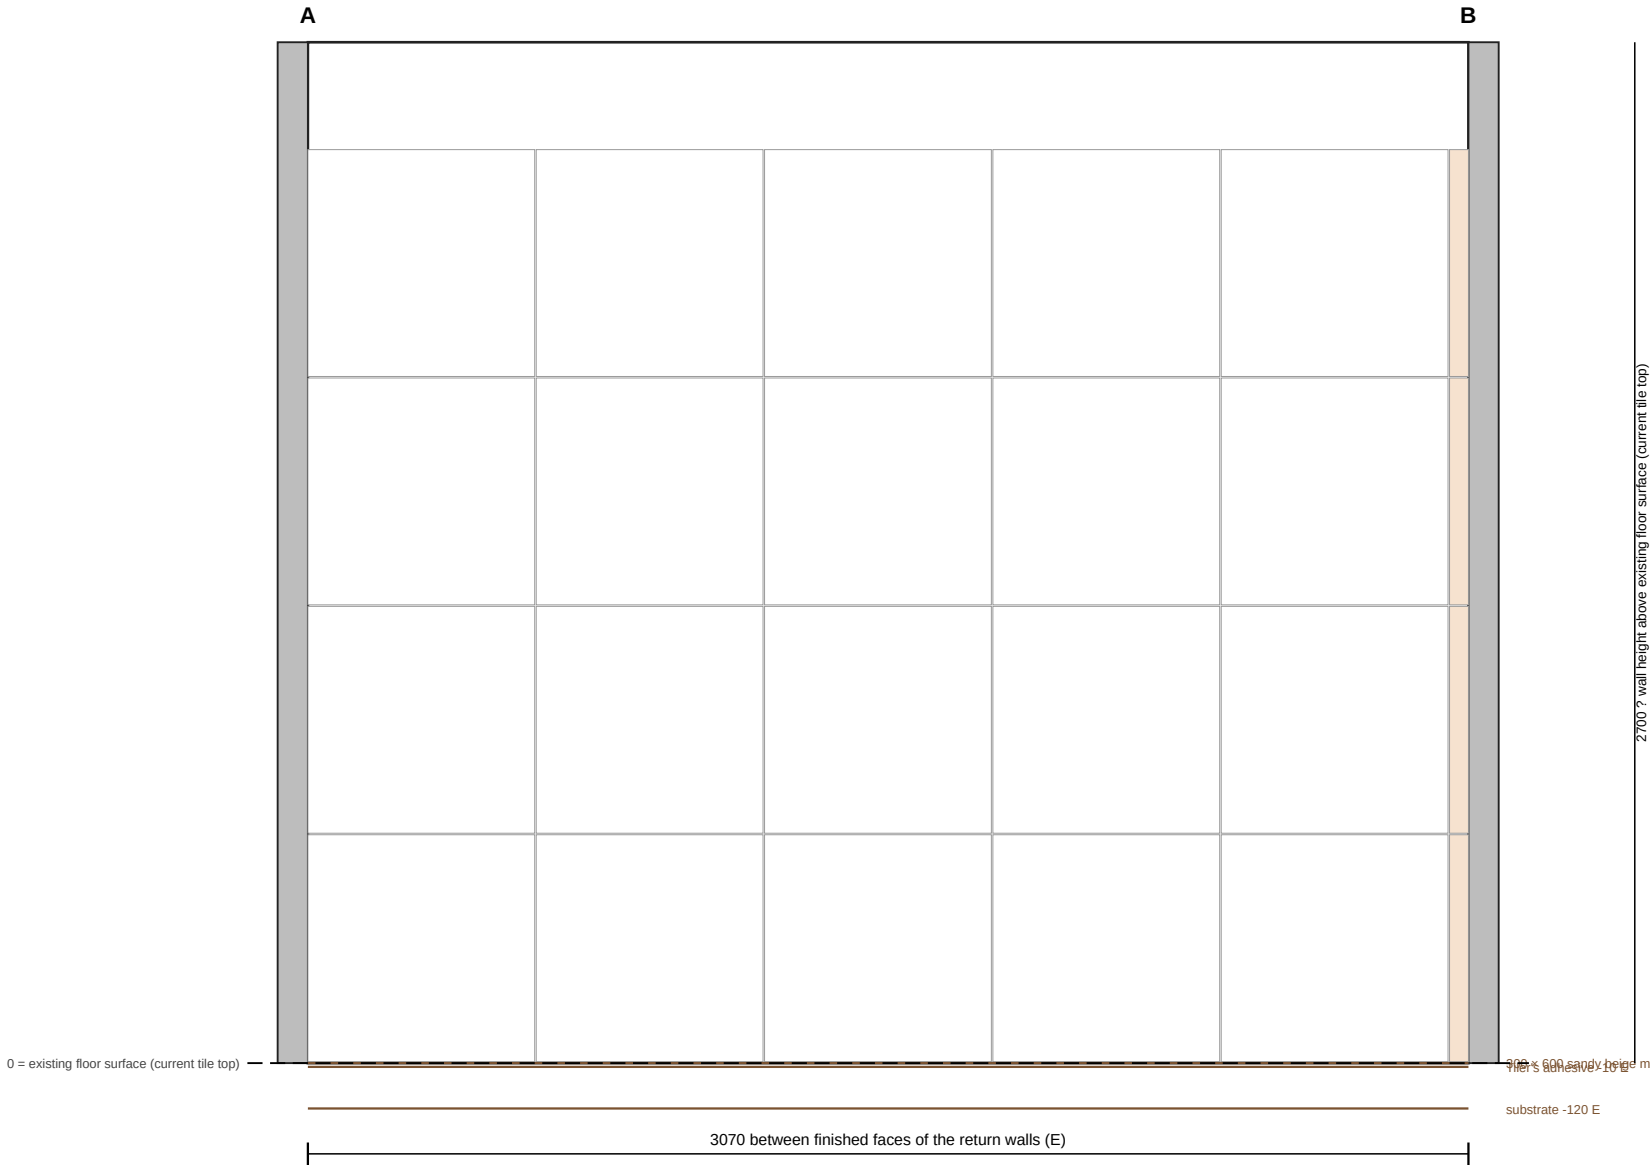

0 1 m
Scale 1:20 at A3. Elevation looking at the face from Bathroom; end A on the left. Dimensions in mm.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 8. Tiles laid, floor and walls · wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 8. Tiles laid, floor and walls

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 28 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall board (e.g. Villaboard)						
Wall n right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_n, toward right side		
Wall e right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_e, toward right side		
Wall s right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	
	outer face position (mm)	11	E estimated	drawn line of wall_s, toward right side		
Wall w right: Villaboard 6 mm	kind	board	ENT entered			
	thickness (mm)	6	P proposed		owner's tile and build-up choices	

Element	Property	Value	Status	Measured from	Source	Missing
	outer face position (mm)	11	E estimated	drawn line of wall_w, toward right side		
Wall tile adhesive						
Wall n right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_n, toward right side		
Wall e right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_e, toward right side		
Wall s right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_s, toward right side		
Wall w right: Tile adhesive (tiler's)	kind	adhesive	ENT entered			
	thickness (mm)	4	E estimated		owner: "glue probably 4mm"; the tiler's choice	
	outer face position (mm)	15	E estimated	drawn line of wall_w, toward right side		
Wall tile						
Wall n right: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_n, toward right side		
Wall e right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_e, toward right side		
Wall s right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_s, toward right side		
Wall w right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			

Element	Property	Value	Status	Measured from	Source	Missing
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor screed						
Bathroom floor: Tiler's screed (heating cable inside)	kind	screed	ENT entered			
	thickness (mm)	?	? unknown			thickness (mm)
	top level (mm)	?	? unknown	existing floor surface (current tile top)		Tiler's screed (heating cable inside) thickness
Floor tile adhesive						
Bathroom floor: Tiler's adhesive	kind	adhesive	ENT entered			
	thickness (mm)	?	? unknown			thickness (mm)
	top level (mm)	-10	E estimated	existing floor surface (current tile top), read down from the finished-level target		
Floor tile						
Bathroom floor: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	top level (mm)	0	P proposed	existing floor surface (current tile top), read down from the finished-level target		
Floor wastes						
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			

Element	Property	Value	Status	Measured from	Source	Missing
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)
Floor planes and falls						
Bathroom: Shower	fall (mm per m)	?	? unknown			Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level
Bathroom: Beside the shower (under the bath)	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level
Bathroom: Dry area	fall (mm per m)	?	? unknown			Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level

Unresolved in this view (11)

- Bathroom floor: Tiler's screed (heating cable inside): thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom floor: Tiler's screed (heating cable inside): top level (mm) unknown; printed as "?" (missing Tiler's screed (heating cable inside) thickness).
- Bathroom floor: Tiler's adhesive: thickness (mm) unknown; printed as "?" (missing thickness (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Bathroom: Shower: fall (mm per m) unknown; printed as "?" (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level).
- Bathroom: Beside the shower (under the bath): fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).
- Bathroom: Dry area: fall (mm per m) unknown; printed as "?" (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level).

Wall n, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.

Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

Shown to: finished face (300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)), 25 from the drawn line E.

300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo): 10 E. Extent on the face is not modelled; drawn over the full face.

End A: Finished face of wall_w (right side) at 25 E along the drawn line.

End B: Finished face of wall_e (right side) at 2185 E along the drawn line.

Proposed tile set-out: 8 columns × 4 courses, 22 cut pieces (see the wall tiling sheet for cuts).



substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 x 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

F1 Corner bath: position along the face ? (no wall set-out recorded) · 0 P to 630 P above existing floor surface (current tile top)
· stands on the finished floor; height from the kind's envelope

F3 Bath waste: position along the face ? (no wall set-out recorded) · height ? · elevation above the finished floor is not recorded;
the kind's catalogue stand-in is not used, so it is not drawn

- Corner bath (bath): set-out unknown; printed as "?" (missing not set out from a wall face).
- Corner bath (bath): wasteFromEnd unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is $520/\sqrt{2} = 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd.).
- Corner bath (bath): wasteEnd unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): wasteFromSide unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is $520/\sqrt{2} = 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide.).
- Corner bath (bath): wasteConnectionDiameter unknown; printed as "?" (missing The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.).
- Corner bath (bath): surround unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): surroundDetail unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): set-out unknown; printed as "?" (missing not set out from a wall face).

... 5 more: see the specification sheet




Site / room: Bathroom (no site address recorded)

Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_n, right side

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

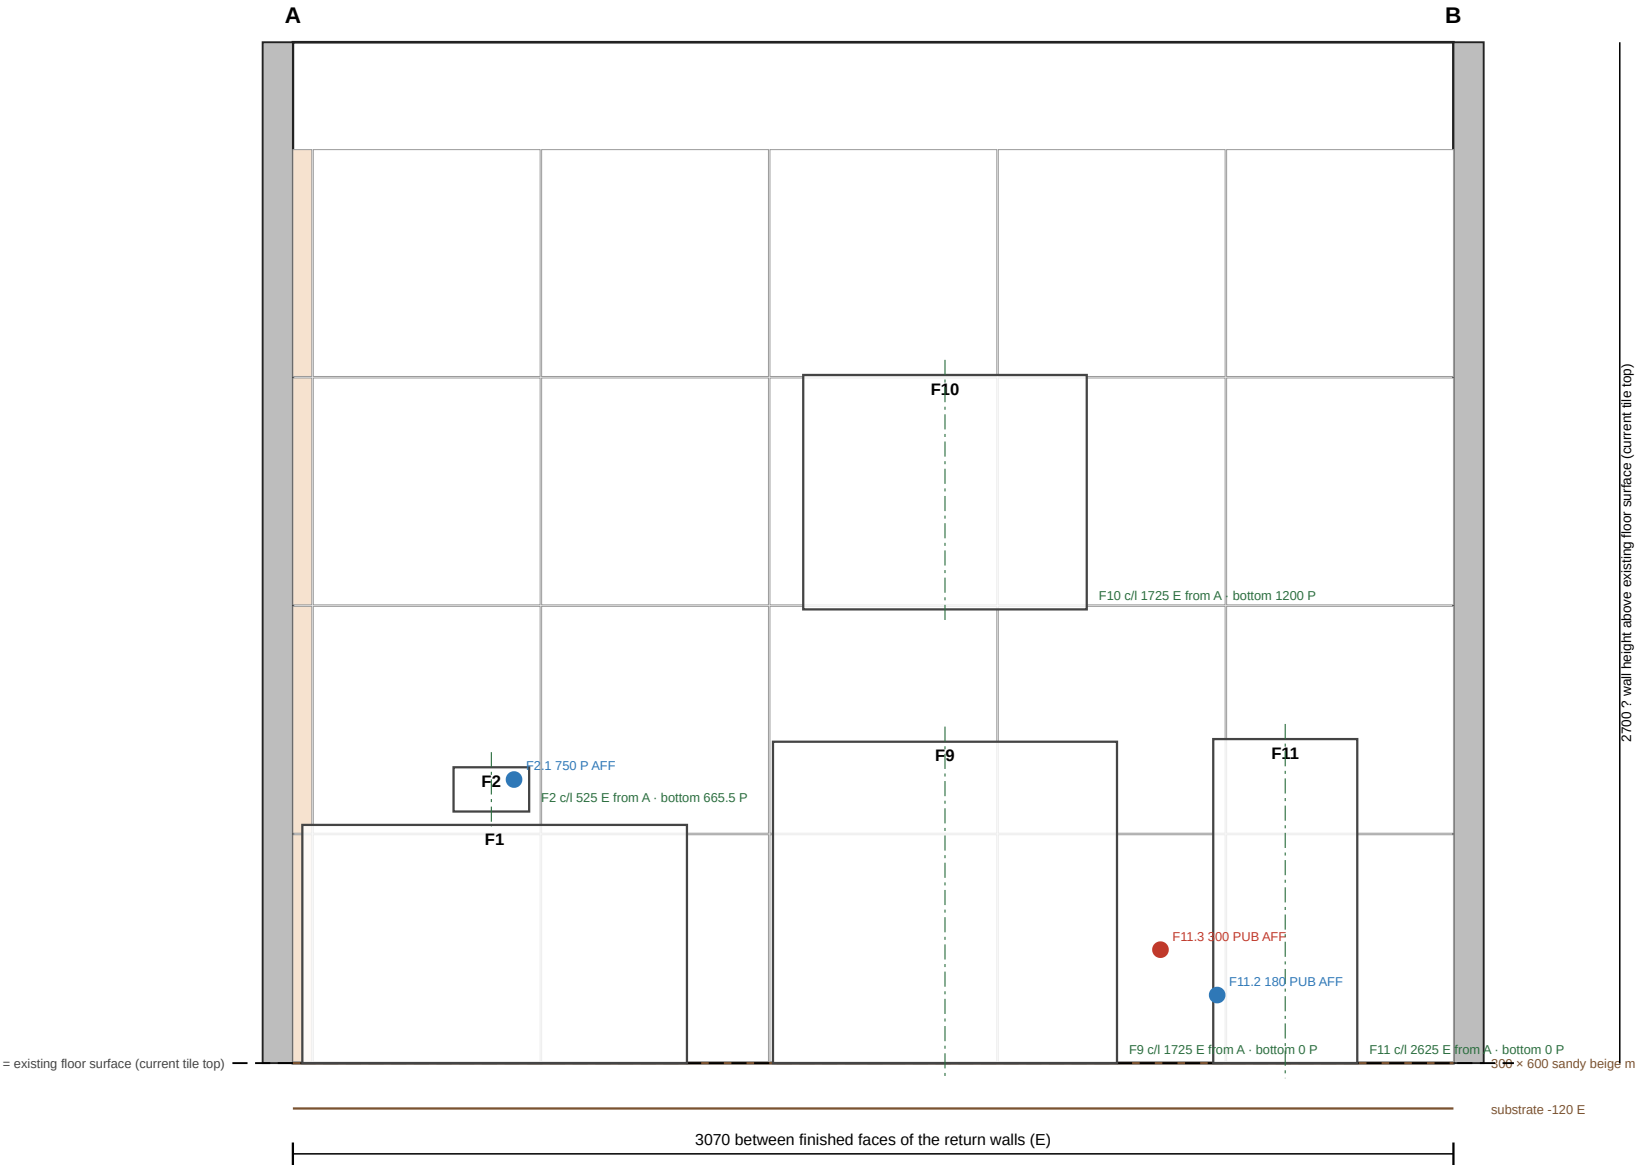

Stage: 9. Fit-out: fixtures and their service points

Wall e, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_n (right side) at 25 E along the drawn line.
End B: Finished face of wall_s (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Fixtures against this face

F1 Corner bath: position along the face ? (no wall set-out recorded) · 0 P to 630 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F2 Bath mixer and spout: 425 E from finished face at A to 625 E · 665.5 P to 782.5 P above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the lever end (envelope bottom); plate centre is the owner's proposed 750 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F11 Toilet: 2434.5 E from finished face at A to 2815.5 E · 0 P to 857 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F9 Vanity: 1270 E from finished face at A to 2180 E · 0 P to 850 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F10 Shaving cabinet: 1350 E from finished face at A to 2100 E · 1200 P to 1820 ? above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.
F3 Bath waste: position along the face ? (no wall set-out recorded) · height ? · elevation above the finished floor is not recorded; the kind's catalogue stand-in is not used, so it is not drawn
F4 Basin mixer: 1701 E from finished face at A to 1749 E · height ? · elevation above the finished floor is not recorded; the kind's catalogue stand-in is not used, so it is not drawn

Service points (AFF = above finished floor)

F2.1 water · Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing): 585 E from finished face at A · 750 P above finished floor · 0 P out from finished face
F11.1 waste · Pan waste, S-trap (floor): 2625 E from finished face at A · up ? · 140–260 PUB out from finished face
F11.2 water · Cold water point (stop tap): 2445 E from finished face at A · 180 PUB above finished floor · 0 PUB out from finished face
F11.3 power · SpaLet seat power point: 2295 E from finished face at A · 300 PUB above finished floor · 0 PUB out from finished face


Unresolved on this face (36)

- Corner bath (bath): set-out unknown; printed as "?" (missing not set out from a wall face).
- Corner bath (bath): wasteFromEnd unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd.).
- Corner bath (bath): wasteEnd unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): wasteFromSide unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide.).
- Corner bath (bath): wasteConnectionDiameter unknown; printed as "?" (missing The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.).
- Corner bath (bath): surround unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): surroundDetail unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): tapHoles unknown; printed as "?" (missing Not entered from the cited source.).
- ... 28 more: see the specification sheet

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_e, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

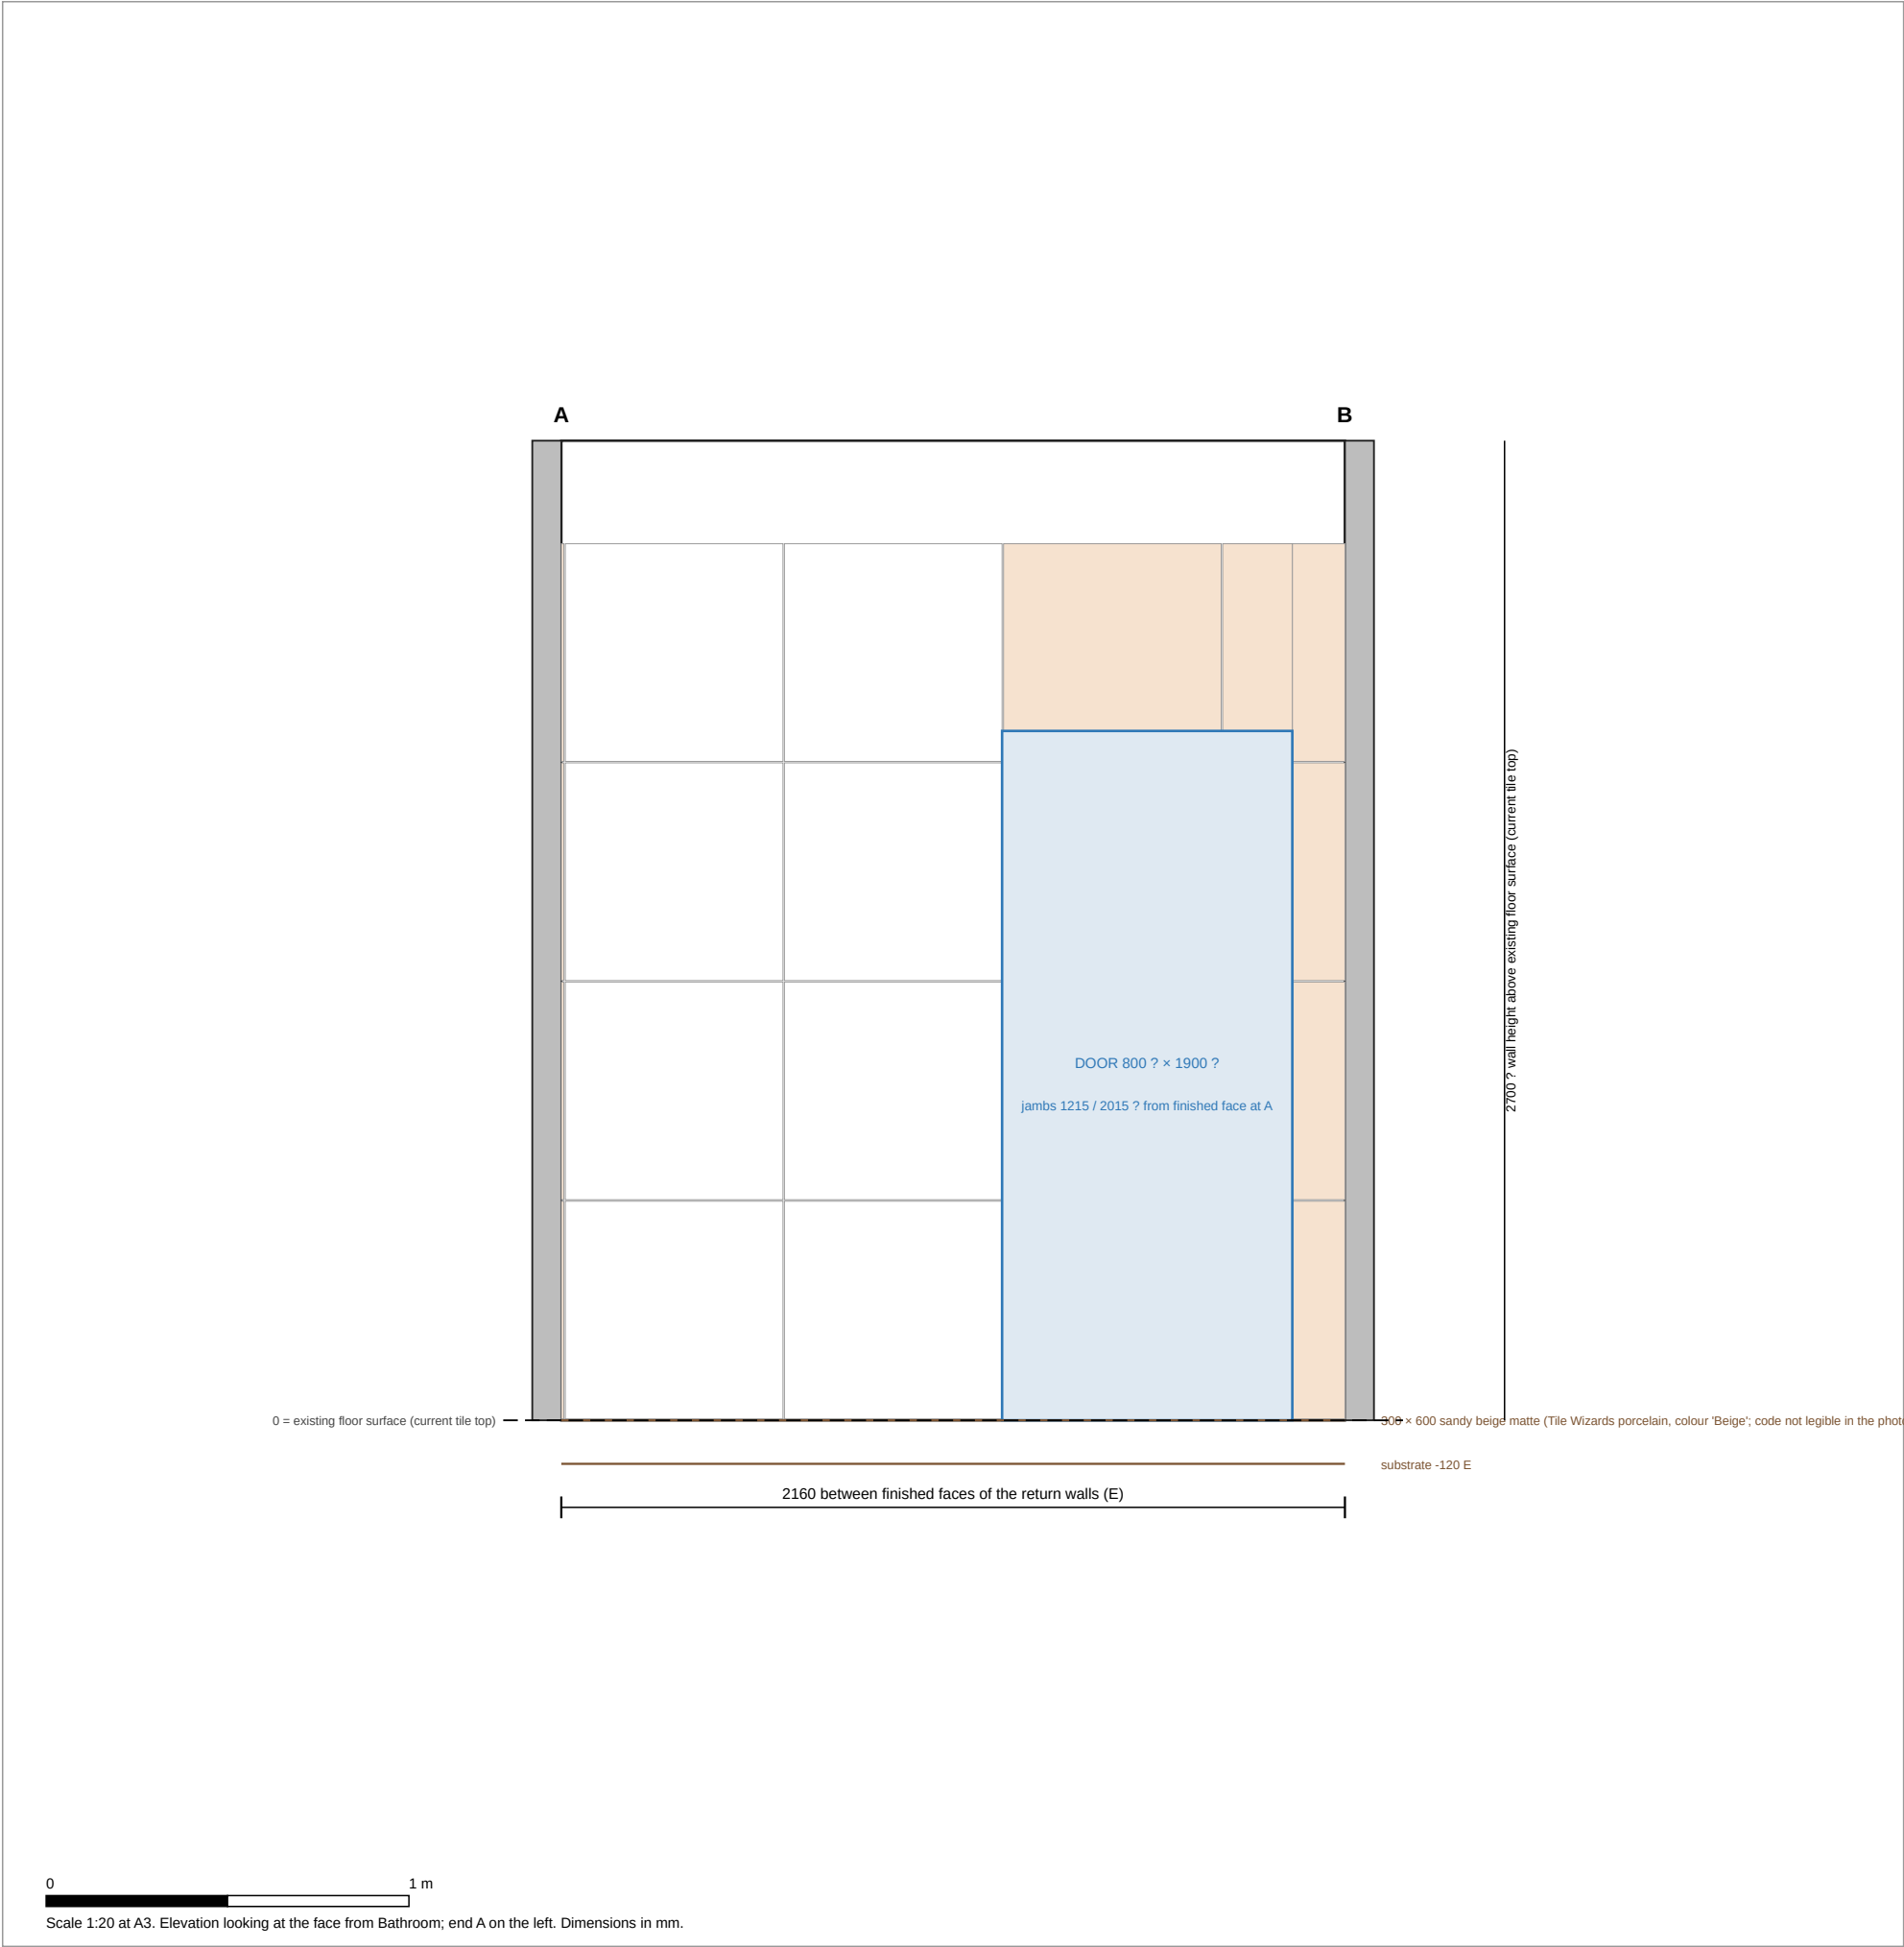

Stage: 9. Fit-out: fixtures and their service points

Wall s, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_e (right side) at 25 E along the drawn line.
End B: Finished face of wall_w (right side) at 2185 E along the drawn line.
Proposed tile set-out: 5 columns × 4 courses, 10 cut pieces (see the wall tiling sheet for cuts).


Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_s, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

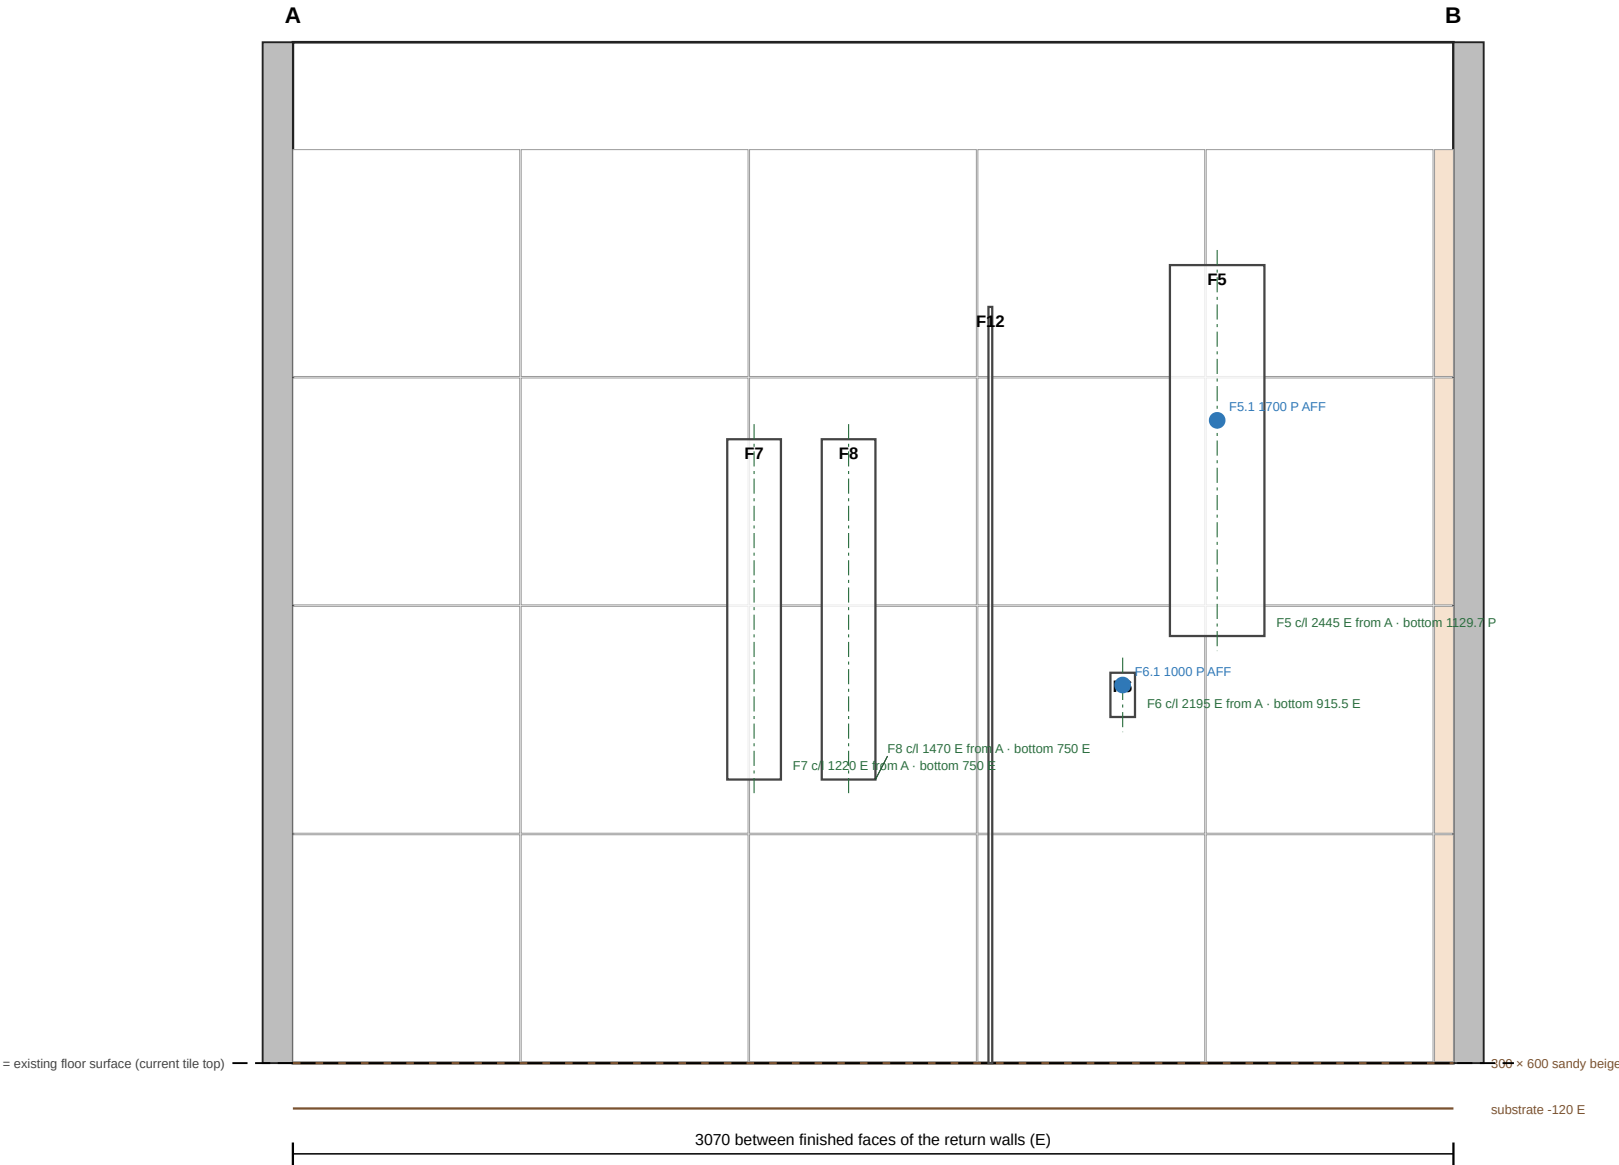

Stage: 9. Fit-out: fixtures and their service points

Wall w, right side, facing Bathroom. Same visible set as the stage plan; everything else hidden, not removed.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

This face

Shown to: finished face (600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)), 25 from the drawn line E.
600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain): 10 E. Extent on the face is not modelled; drawn over the full face.
End A: Finished face of wall_s (right side) at 25 E along the drawn line.
End B: Finished face of wall_n (right side) at 3095 E along the drawn line.
Proposed tile set-out: 6 columns × 4 courses, 4 cut pieces (see the wall tiling sheet for cuts).

Floor at this wall

substrate top -120 E above existing floor surface (current tile top) (flat build-up level)
300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo) top 0 P above existing floor surface (current tile top) (flat build-up level)
Finished floor along this face follows the recorded falls (green); 41 of 41 samples have no plane level.

Fixtures against this face

F12 Fixed glass screen: position along the face ? (no wall set-out recorded) · 0 P to 2000 P above existing floor surface (current tile top) · stands on the finished floor; height from the kind's envelope
F6 Shower mixer: 2162.5 E from finished face at A to 2227.5 E · 915.5 E to 1032.5 ? above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the lever end (envelope bottom); plate centre is the owner's proposed 1000 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F5 Shower system: 2320 E from finished face at A to 2570 E · 1129.7 P to 2110.7 P above existing floor surface (current tile top) · installation height above the named floor datum; bottom is the rail foot, 70.3 mm below the lower bracket (derived); lower bracket is the owner's proposed 1200 mm; Falls unresolved at this point: height read from the flat finished-floor target.
F7 Towel rail: 1149 E from finished face at A to 1291 E · 750 E to 1650 E above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.
F8 Towel rail: 1399 E from finished face at A to 1541 E · 750 E to 1650 E above existing floor surface (current tile top) · installation height above the named floor datum; Falls unresolved at this point: height read from the flat finished-floor target.

Service points (AFF = above finished floor)

F5.1 water · G1/2 inlet at the upper wall rose (on the rail centreline): 2445 E from finished face at A · 1700 P above finished floor · 0 P out from finished face
F6.1 water · Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived): 2195 E from finished face at A · 1000 P above finished floor · 0 P out from finished face

Unresolved on this face (35)

- Shower system (shower_system): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): pressureMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): temperatureMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): adjustmentMin unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): adjustmentMax unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
 - Shower system (shower_system): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- ... 27 more: see the specification sheet

Project: Bathroom Concept

Site / room: Bathroom (no site address recorded)
Stage elevation: 9. Fit-out: fixtures and their service points · wall wall_w, right side
Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01
Prepared by: ? · Plan: Bathroom Concept

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Specification: 9. Fit-out: fixtures and their service points

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE

Lists exactly the 33 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

Element	Property	Value	Status	Measured from	Source	Missing
Walls as drawn (line, length, body)						
Wall n	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall e	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall s	length A → B along drawn line (mm)	2210	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall w	length A → B along drawn line (mm)	3120	ENT entered			
	thickness (mm)	100	? unknown			
	height (mm)	2700	? unknown			
Wall tile						
Wall n right: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_n, toward right side		
Wall e right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_e, toward right side		
Wall s right: 600 × 600 white gloss, a few light grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_s, toward right side		
Wall w right: 600 × 600 white gloss, a few light	kind	tile	ENT entered			

Element	Property	Value	Status	Measured from	Source	Missing
grey streaks (Tile Wizards 'Ice' TWJ-14, porcelain)	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	outer face position (mm)	25	E estimated	drawn line of wall_w, toward right side		
Windows						
Window window_n on wall_n	width (mm)	1810	? unknown			
	sill above floor (mm)	1520	? unknown			
	height (mm)	600	? unknown			
	centre from end A (mm)	1105	ENT entered	wall_n end A, along the drawn line		
Doors						
Door door_s on wall_s	width (mm)	800	? unknown			
	height (mm)	1900	? unknown			
	centre from end A (mm)	1640	ENT entered	wall_s end A, along the drawn line		
Rooms (outline label)						
Room Bathroom	size w × h (mm)	2110 × 3020	ENT entered			
Floor substrate and datum						
Bathroom floor: substrate	substrate	concrete slab, framed in place (house on piers)	ENT entered			
	substrate top level (mm)	-120	E estimated	existing floor surface (current tile top)	owner: about 120 mm below the current tile, seen from underneath; confirm after demolition	
	finished level target (mm)	0	P proposed	existing floor surface (current tile top)	finished tile back at the current tile level, so the doorway stays flush (to confirm)	
	Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)	108.5	E estimated	substrate top to target		
Floor tile						
Bathroom floor: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo)	kind	tile	ENT entered			
	thickness (mm)	10	E estimated		owner: 10 mm porcelain, to be checked	
	top level (mm)	0	P proposed	existing floor surface (current tile top), read down from the finished-level target		
Floor wastes						

Element	Property	Value	Status	Measured from	Source	Missing
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN	kind	linear	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Lauxes Next Gen 35 Custom 1000, brushed nickel	NAM named			
	grate length (mm)	1000	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 1000 mm custom cut length, end to end	
	grate width (mm)	100	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 100 mm across the channel (BuildMat listing: 100 mm wide)	
	outlet diameter (mm)	50	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): 1× WO50-BN waste outlet; measurement date 2026-10-05; human; metres — 50 mm outlet; owner found it in the box on 5 Oct 2026	
	body depth below grate (mm)	35	M measured	grate top	Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): Next Gen 35 Custom 1000 × 100 × 35 mm; measurement date 2026-10-05; human; metres — 35 mm channel depth below the grate (BuildMat listing: 35 mm deep)	
	outlet position	?	? unknown			outlet position along the channel (entered on the waste), outlet sideways offset (brief)
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet	kind	point	ENT entered			
	finished level at waste (mm)	?	? unknown	existing floor surface (current tile top)		finished level at waste (mm)
	drain product	Kano 316 Tile Insert Waste 120×120, brushed nickel	NAM named			
	grate type	tile-insert	NAM named			
	grate length (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	grate width (mm)	120	M measured		Photographed packing slip, Surreal Solutions INV-211061 (24 Sep 2026): KANO 316 Tile Insert Waste 120×120; measurement date 2026-10-05; human; metres	
	outlet diameter (mm)	50	M measured		Owner's delivery check, 5 Oct 2026: the Kano outlet is 50 mm; measurement date 2026-10-05; human; metres	
	body depth below grate (mm)	?	? unknown	grate top		installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief
	outlet position	?	? unknown			outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)
Fixtures (bath, vanity, toilet, screen...)						
Corner bath (bath)	footprint w × d (mm)	1018 × 1018	PUB published			
	set-out	?	? unknown			not set out from a wall face
	project selection	purchased	ENT entered			
	exact product	Angie Corner 1000mm Bath, GW (SB184-1000GW) · manufacturer Enflair · model Angie Corner 1000mm Bath, GW	ENT entered			
	Product code	SB184-1000GW	ENT entered			
	Finish	unknown	? unknown			

Element	Property	Value	Status	Measured from	Source	Missing
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
	length	1000	PUB published	fixture-end	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (SB184-1000 dimension drawing: 1000 mm along each wall side)	
	width	1000	PUB published	fixture-side	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (SB184-1000 dimension drawing: 1000 mm along each wall side)	
	height	630	PUB published	finished-floor	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (A-A: 630 mm overall height)	
	installation	corner	PUB published		https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (SB184-1000 dimension drawing: right-angle corner fit)	
	shape	corner-round	PUB published		https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (SB184-1000: two straight wall sides and a rounded front)	
	frontWidth	1414.2	PUB published	other	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (derived: chord of the two 1000 mm wall sides)	
	frontProjection	1090	PUB published	other	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (section A-A: 1090 mm from the corner to the front of the curve)	
	wasteFromEnd	?	? unknown	fixture-end		Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is $520/\sqrt{2} \approx 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd.
	wasteEnd	?	? unknown			Not entered from the cited source.
	wasteFromSide	?	? unknown	fixture-side		Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is $520/\sqrt{2} \approx 367.7$ mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide.
	wasteFromCorner	520	PUB published	other	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (plan: Ø50 waste 520 mm from the corner on the bisector)	
	wasteHoleDiameter	50	PUB published	other	https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (plan: Ø50 waste hole)	
	wasteConnectionDiameter	?	? unknown	fixture-centreline		The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.
	overflow	no	PUB published		https://enflair.com.au/products/angie-1000mm-corner-fit-japanese-soaking-bathtub-gloss-white (dimension drawing: no overflow shown)	
	surround	?	? unknown			Not entered from the cited source.
	surroundDetail	?	? unknown			Not entered from the cited source.
Bath mixer and spout (bath_mixer)	footprint w × d (mm)	200 × 162	PUB published			
	set-out	550 from A · 0 off finished	P proposed	wall_e right side, finished face	Owner, 7 Oct 2026: plate centre 500 mm from the window wall, held from the window wall's existing surface as drawn; which face the 500 is measured to is to confirm	

Element	Property	Value	Status	Measured from	Source	Missing
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	665.5	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 7 Oct 2026: plate centre 750 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (hub radius 22.5 less the 107 mm lever, set drawing)	
	installed bottom level (mm)	665.5	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 7 Oct 2026: plate centre 500 mm from the window wall, held from the window wall's existing surface as drawn; which face the 500 is measured to is to confirm; Owner, 7 Oct 2026: plate centre 750 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (hub radius 22.5 less the 107 mm lever, set drawing); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	782.5	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 7 Oct 2026: plate centre 500 mm from the window wall, held from the window wall's existing surface as drawn; which face the 500 is measured to is to confirm; Owner, 7 Oct 2026: plate centre 750 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (hub radius 22.5 less the 107 mm lever, set drawing); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice; https://ats.sydney/cdn/shop/files/K1132-_-150_KDPP32-ProfileIII150mmBasin_BathWallMixerSetwithRectangularPlate-specification.jpg?v=1757294155&width=2400 (derived: 65 mm plate, hub top 22.5 mm above the plate centre, lever 107 mm from the hub top)	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			
	project selection	purchased	ENT entered			
	exact product	Enflair K1132-31 trim and K1150-31-0-150 spout on one KDPP32 rectangular plate, brushed SS nickel · manufacturer Enflair · model Profile III 150mm basin/bath wall mixer set with rectangular plate	ENT entered			
	Product code	K1132-##-150+KDPP32	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	documented	PUB published			
	component 1	K1132 inner part (in-wall body) · code unknown · quantity unknown · unresolved	? unknown			
	width	200	PUB published	fixture-end	https://ats.sydney/cdn/shop/files/K1132-_-150_KDPP32-ProfileIII150mmBasin_BathWallMixerSetwithRectangularPlate-specification.jpg?v=1757294155&width=2400 (K1132-##-150+KDPP32 drawing: plate 200 mm)	
	depth	162	PUB published	fixture-side	https://enflair.com.au/products/profile-iii-150mm-basin-bath-wall-spout-brushed-ss-nickel (derived: 150 mm to the outlet-face centre plus Ø24/2 for the outer lip; the lip itself is not dimensioned)	

Element	Property	Value	Status	Measured from	Source	Missing
	height	117	PUB published	fixture-bottom	https://ats.sydney/cdn/shop/files/K1132-_ -150_KDPP32-ProfileIII150mmBasin_BathWallMixerSetwithRectangularPlate-specification.jpg?v=1757294155&width=2400 (derived: 65 mm plate, hub top 22.5 mm above the plate centre, lever 107 mm from the hub top)	
	mounting	wall-exposed	PUB published		https://ats.sydney/cdn/shop/files/K1132-_ -150_KDPP32-ProfileIII150mmBasin_BathWallMixerSetwithRectangularPlate-specification.jpg?v=1757294155&width=2400 (K1132-##-150+KDPP32 wall mixer set drawing)	
	tapHoles	?	? unknown			Not entered from the cited source.
	holeLayout	?	? unknown			Not entered from the cited source.
	fixingLayout	?	? unknown			Not entered from the cited source.
	pressureMin	?	? unknown			Not entered from the cited source.
	pressureMax	500 kPa	M measured		Photographed K1132-31 label: max static inlet pressure 500 kPa; measurement date 2026-10-05; human; kPa	
	temperatureMax	80 °C	M measured		Photographed K1132-31 label: max hot water 80°; measurement date 2026-10-05; human; °C	
	inletMode	?	? unknown			Not entered from the cited source.
	inletSpacing	?	? unknown	fixture-centreline		Not entered from the cited source.
	waterConnection	G1/2 in the plate	PUB published		https://enflair.com.au/products/profile-iii-150mm-basin-bath-wall-spout-brushed-ss-nickel (K1150-##-0-150 drawing: G1/2 in the cover plate)	
	inletOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	inletDepth	?	? unknown	fixture-side		Not entered from the cited source.
	inletHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
	concealedDepthMin	?	? unknown	finished-wall		Not entered from the cited source.
	concealedDepthMax	?	? unknown	finished-wall		Not entered from the cited source.
Bath waste (bath_waste)	footprint w × d (mm)	70 × 70	ENT entered			
	set-out	?	? unknown			not set out from a wall face
	fitted inside	bath: 141.3 across its centreline, 367.7 from its back edge	P proposed			
	project selection	purchased	ENT entered			
	exact product	Ahrok SDP-40BN dome pop short bath waste, 40 mm, pull-out basket, brushed nickel · manufacturer Ahrok · model Dome Pop Short Bath Waste 40mm, with pull out basket	ENT entered			
	Product code	SDP-40BN	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			

Element	Property	Value	Status	Measured from	Source	Missing
	width	?	? unknown	fixture-end		Not entered from the cited source.
	depth	?	? unknown	fixture-side		Not entered from the cited source.
	height	?	? unknown	fixture-bottom		Not entered from the cited source.
	outletDiameter	?	? unknown	fixture-centreline		Carton prints 40 mm nominal connection; no manufacturer sheet, so not entered as a published figure
	outletSizeKind	connection	PUB published		carton label	
	style	dome-pop	M measured		Photographed carton: Dome Pop Short Bath Waste; measurement date 2026-10-05; human; choice	
	overflow	?	? unknown			Not entered from the cited source.
	strainer	pull-out basket	M measured		Photographed carton: with pull out basket; measurement date 2026-10-05; human; text	
	certification	WaterMark licence WM-022812, AS 1589-2001	M measured		Photographed SDP-40BN carton; measurement date 2026-10-05; human; text	
Basin mixer (basin_mixer)	footprint w × d (mm)	48 × 145	PUB published			
	set-out	?	? unknown			not set out from a wall face
	fitted inside	vanity: 0 across its centreline, 62.5 from its back edge	P proposed			
	project selection	purchased	ENT entered			
	exact product	Enflair K1110-31 petite basin mixer, brushed SS nickel · manufacturer Enflair · model Profile III petite basin mixer	ENT entered			
	Product code	K1110-31	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
	width	48	PUB published	fixture-end	https://enflair.com.au/products/profile-iii-petite-basin-mixer-brushed-ss-nickel (K1110 drawing: flange Ø48)	
	depth	145	PUB published	fixture-side	https://enflair.com.au/products/profile-iii-petite-basin-mixer-brushed-ss-nickel (K1110 drawing: 145 mm back-to-front from the Ø48 flange back)	
	height	148	PUB published	fixture-bottom	https://enflair.com.au/products/profile-iii-petite-basin-mixer-brushed-ss-nickel (K1110 drawing: 148 mm from the deck/flange to the top)	
	mounting	deck	PUB published		https://enflair.com.au/products/profile-iii-petite-basin-mixer-brushed-ss-nickel (K1110 petite basin mixer, deck-mounted)	
	tapHoles	1	M measured		Photographed unit and K1110 drawing: single deck hole, flange Ø48; measurement date 2026-10-05; human; count	
	holeLayout	Single hole, flange Ø48	PUB published		https://enflair.com.au/products/profile-iii-petite-basin-mixer-brushed-ss-nickel (K1110 drawing: flange Ø48)	
	fixingLayout	?	? unknown			Not entered from the cited source.

Element	Property	Value	Status	Measured from	Source	Missing
	pressureMin	?	? unknown			Not entered from the cited source.
	pressureMax	500 kPa	M measured		Photographed K1110-31 label: max static inlet pressure 500 kPa; measurement date 2026-10-05; human; kPa	
	temperatureMax	80 °C	M measured		Photographed K1110-31 label: max hot water 80°; measurement date 2026-10-05; human; °C	
	inletMode	?	? unknown			Not entered from the cited source.
	inletSpacing	?	? unknown	fixture-centreline		Not entered from the cited source.
	waterConnection	?	? unknown			Not entered from the cited source.
	inletOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	inletDepth	?	? unknown	fixture-side		Not entered from the cited source.
	inletHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
	concealedDepthMin	?	? unknown	finished-wall		Not entered from the cited source.
	concealedDepthMax	?	? unknown	finished-wall		Not entered from the cited source.
Shower system (shower_system)	footprint w × d (mm)	250 × 552	PUB published			
	set-out	650 from B · 0 off finished	P proposed	wall_w right side, finished face	Centred on the 1200 mm shower (owner: the channel is beneath the shower head, centred on the shower), so 600 mm from the window wall's existing surface as drawn; which face the screen's 1200 is measured to is open	
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	1129.7	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 7 Oct 2026: lower bracket (rose) centre 1200 mm above the finished floor tiles (proposed, open); envelope bottom is the rail foot, 70.3 mm below it (Y1173 drawing, derived)	
	installed bottom level (mm)	1129.7	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Centred on the 1200 mm shower (owner: the channel is beneath the shower head, centred on the shower), so 600 mm from the window wall's existing surface as drawn; which face the screen's 1200 is measured to is open; Owner, 7 Oct 2026: lower bracket (rose) centre 1200 mm above the finished floor tiles (proposed, open); envelope bottom is the rail foot, 70.3 mm below it (Y1173 drawing, derived); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	2110.7	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Centred on the 1200 mm shower (owner: the channel is beneath the shower head, centred on the shower), so 600 mm from the window wall's existing surface as drawn; which face the screen's 1200 is measured to is open; Owner, 7 Oct 2026: lower bracket (rose) centre 1200 mm above the finished floor tiles (proposed, open); envelope bottom is the rail foot, 70.3 mm below it (Y1173 drawing, derived); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice; https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: rail overall 981 mm)	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			

Element	Property	Value	Status	Measured from	Source	Missing
	project selection	purchased	ENT entered			
	exact product	Y1173-31-11-250 twin shower, 250 mm rain head, 3F handpiece, brushed nickel · manufacturer unknown · model Profile round twin shower system with adjustable rail	ENT entered			
	Product code	Y1173-31-11-250	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	documented	PUB published			
	component 1	K1130 wall shower/bath mixer, inner part · code unknown · quantity unknown · unresolved	? unknown			
	width	250	PUB published	fixture-end	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173-##-11-250 drawing: rain head Ø250)	
	depth	552	PUB published	fixture-side	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (derived: 427 mm wall-face to connector centreline plus Ø250/2 to the far edge of the head)	
	height	981	PUB published	fixture-bottom	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: rail overall 981 mm)	
	fittingType	system	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173-##-11-250 twin shower system)	
	mounting	wall	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 side view: wall roses Ø55)	
	headWidth	250	PUB published	fixture-centreline	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173-##-11-250 drawing: rain head Ø250)	
	armProjection	427	PUB published	fixture-side	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: 427 mm from the mounting/wall face to the rain-head connector centreline)	
	railLength	981	PUB published	fixture-bottom	https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: rail overall 981 mm)	
	fixingLayout	Two wall roses Ø55 with 10 mm plates; 500 mm between bracket centres; upper rose 410.7 mm below the rail top; 49 mm from the wall/mounting face to the riser centreline	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: 500 mm bracket centres, 410.7 mm from the top, roses Ø55, plates 10 mm, 49 mm to the riser)	
	pressureMin	?	? unknown			Not entered from the cited source.
	pressureMax	?	? unknown			Not entered from the cited source.
	temperatureMax	?	? unknown			Not entered from the cited source.
	adjustment	adjustable	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173: adjustable rail / slider)	
	adjustmentMin	?	? unknown	fixture-bottom		Not entered from the cited source.
	adjustmentMax	?	? unknown	fixture-bottom		Not entered from the cited source.
	waterEntry	other	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (twin outlets: rain head and handpiece)	
	waterConnection	G1/2 at the upper wall rose only; rain head and 3F	PUB published		https://enflair.com.au/products/profile-round-twin-shower-system-with-adjustable-rail-and-250mm-head-brushed-nickel (Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower one)	

Element	Property	Value	Status	Measured from	Source	Missing
		handpiece				
	inletOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	inletDepth	?	? unknown	fixture-side		Not entered from the cited source.
	inletHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
Shower mixer (shower_mixer)	footprint w × d (mm)	65 × 69.5	ENT entered			
	set-out	900 from B · 0 off finished	E estimated	wall_w right side, finished face	Drawn stand-in: where the mixer sits along the shower wall is not chosen (drawn 850 mm from the window wall's existing surface)	
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	915.5	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 7 Oct 2026: plate centre 1000 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (K1130 drawing)	
	installed bottom level (mm)	915.5	E estimated	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: where the mixer sits along the shower wall is not chosen (drawn 850 mm from the window wall's existing surface); Owner, 7 Oct 2026: plate centre 1000 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (K1130 drawing); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	1032.5	? unknown	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: where the mixer sits along the shower wall is not chosen (drawn 850 mm from the window wall's existing surface); Owner, 7 Oct 2026: plate centre 1000 mm above the finished floor tiles (proposed); envelope bottom is the lever end, 84.5 mm below the plate centre (K1130 drawing); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			
	project selection	purchased	ENT entered			
	exact product	Enflair K1130-31 shower mixer trim, round Ø65 plate, brushed SS nickel · manufacturer Enflair · model Profile III shower/bath wall mixer	ENT entered			
	Product code	K1130-31	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
	width	?	? unknown	fixture-end		Owner's copy of the Enflair K1130 drawing gives plate

Element	Property	Value	Status	Measured from	Source	Missing
						Ø65; it has no web link, so it is not entered as a published brief figure (the figures are on the measures).
	depth	?	? unknown	fixture-side		Owner's copy of the Enflair K1130 drawing gives 65.5 mm lever to plate plus the 4 mm plate; no web link, so not entered as a published brief figure.
	height	?	? unknown	fixture-bottom		Derived from the owner's copy of the Enflair K1130 drawing (Ø65 plate, Ø45 hub, 107 mm lever); no web link, so not entered as a published brief figure.
	mounting	?	? unknown			Not entered from the cited source.
	tapHoles	?	? unknown			Not entered from the cited source.
	holeLayout	?	? unknown			Not entered from the cited source.
	fixingLayout	?	? unknown			Not entered from the cited source.
	pressureMin	?	? unknown			Not entered from the cited source.
	pressureMax	500 kPa	M measured		Photographed K1130 inner-part label: max static inlet pressure 500 kPa; measurement date 2026-10-05; human; kPa	
	temperatureMax	80 °C	M measured		Photographed K1130 inner-part label: max hot water 80°; measurement date 2026-10-05; human; °C	
	inletMode	?	? unknown			Not entered from the cited source.
	inletSpacing	?	? unknown	fixture-centreline		Not entered from the cited source.
	waterConnection	?	? unknown			Not entered from the cited source.
	inletOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	inletDepth	?	? unknown	fixture-side		Not entered from the cited source.
	inletHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
	concealedDepthMin	?	? unknown	finished-wall		Not entered from the cited source.
	concealedDepthMax	?	? unknown	finished-wall		Not entered from the cited source.
Towel rail (towel_rail)	footprint w × d (mm)	142 × 100	PUB published			
	set-out	1875 from B · 0 off finished	E estimated	wall_w right side, finished face	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1825 mm from the window wall's existing surface)	
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	750	P proposed	Bathroom: finished-floor; existing floor	Owner: foot 750 mm above the finished floor tiles (proposed)	

Element	Property	Value	Status	Measured from	Source	Missing
				surface (current tile top)		
	installed bottom level (mm)	750	E estimated	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1825 mm from the window wall's existing surface); Owner: foot 750 mm above the finished floor tiles (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	1650	E estimated	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1825 mm from the window wall's existing surface); Owner: foot 750 mm above the finished floor tiles (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice; https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: H900)	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			
	project selection	purchased	ENT entered			
	exact product	Thermorail VS900HBN, 12 V vertical rail, round, brushed nickel, concealed wiring · manufacturer Thermorail · model VS900HBN	ENT entered			
	Product code	VS900HBN	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
	width	142	PUB published	fixture-end	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: Size W142 × H900 × D100)	
	depth	100	PUB published	fixture-side	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: D100)	
	height	900	PUB published	fixture-bottom	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: H900)	
	fixingLayout	780 mm vertical centres; Ø32 wall roses (thin discs; thickness not on the sheet); Ø25 stems (section; length not on the sheet); removable hook 52 mm from the rail centreline, 19 mm arm section; cap 42 mm wall-to-room (height not on the sheet)	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 780 mm centres, Ø32 roses, Ø25 stem section, hook 52 mm from centreline, 19 mm arm section, 42 mm cap depth)	
	mounting	wall	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: wall-mounted vertical rail)	
	fixingCentresWidth	?	? unknown	fixture-centreline		Not entered from the cited source.
	fixingCentresHeight	780	PUB published	fixture-bottom	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 780 mm between fixing centres)	
	heating	electric	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V, 24 W)	

Element	Property	Value	Status	Measured from	Source	Missing
	power	required	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V electric)	
	powerConnection	low-voltage	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V)	
	powerRequirements	12 V, 24 W; concealed wiring; a transformer is supplied with each rail (owner: both transformers in the ceiling space).	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V, 24 W)	
	powerOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	powerHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
	powerDepth	?	? unknown	fixture-side		Not entered from the cited source.
	waterConnection	?	? unknown			Not entered from the cited source.
Towel rail (towel_rail_2)	footprint w × d (mm)	142 × 100	PUB published			
	set-out	1625 from B · 0 off finished	E estimated	wall_w right side, finished face	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1575 mm from the window wall's existing surface)	
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	750	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner: foot 750 mm above the finished floor tiles (proposed)	
	installed bottom level (mm)	750	E estimated	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1575 mm from the window wall's existing surface); Owner: foot 750 mm above the finished floor tiles (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	1650	E estimated	Bathroom: finished-floor; existing floor surface (current tile top)	Drawn stand-in: the rails' places along the left wall are not chosen (drawn 1575 mm from the window wall's existing surface); Owner: foot 750 mm above the finished floor tiles (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice; https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: H900)	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			
	project selection	purchased	ENT entered			
	exact product	Thermorail VS900HBN, 12 V vertical rail, round, brushed nickel, concealed wiring · manufacturer Thermorail · model VS900HBN	ENT entered			
	Product code	VS900HBN	ENT entered			

Element	Property	Value	Status	Measured from	Source	Missing
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
	width	142	PUB published	fixture-end	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: Size W142 × H900 × D100)	
	depth	100	PUB published	fixture-side	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: D100)	
	height	900	PUB published	fixture-bottom	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: H900)	
	fixingLayout	780 mm vertical centres; Ø32 wall roses (thin discs; thickness not on the sheet); Ø25 stems (section; length not on the sheet); removable hook 52 mm from the rail centreline, 19 mm arm section; cap 42 mm wall-to-room (height not on the sheet)	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 780 mm centres, Ø32 roses, Ø25 stem section, hook 52 mm from centreline, 19 mm arm section, 42 mm cap depth)	
	mounting	wall	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: wall-mounted vertical rail)	
	fixingCentresWidth	?	? unknown	fixture-centreline		Not entered from the cited source.
	fixingCentresHeight	780	PUB published	fixture-bottom	https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 780 mm between fixing centres)	
	heating	electric	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V, 24 W)	
	power	required	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V electric)	
	powerConnection	low-voltage	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V)	
	powerRequirements	12 V, 24 W; concealed wiring; a transformer is supplied with each rail (owner: both transformers in the ceiling space).	PUB published		https://www.thermogroup.com.au/wp-content/uploads/2021/02/2022-VS900HBN-Specification-Sheet.pdf (VS900HBN specification sheet: 12 V, 24 W)	
	powerOffset	?	? unknown	fixture-centreline		Not entered from the cited source.
	powerHeight	?	? unknown	fixture-bottom		Not entered from the cited source.
	powerDepth	?	? unknown	fixture-side		Not entered from the cited source.
	waterConnection	?	? unknown			Not entered from the cited source.
Vanity (vanity)	footprint w × d (mm)	910 × 465	ENT entered			
	set-out	1750 from A · 0 off finished	P proposed	wall_e right side, finished face	Owner: vanity centred 1700 mm from the window wall (existing surface, as drawn), back to the right wall's finished face; not yet checked against the old position plus 300 mm	
	project selection	reused	ENT entered			
	exact product	Gloss white floor-standing vanity, ceramic top with integrated basin (reused) · manufacturer unknown · model unknown	ENT entered			

Element	Property	Value	Status	Measured from	Source	Missing
	Product code	unknown	? unknown			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
Shaving cabinet (shaving_cabinet)	footprint w × d (mm)	750 × 160	ENT entered			
	set-out	1750 from A · 0 off finished	P proposed	wall_e right side, finished face	Owner: centred over the vanity, back to the right wall's finished face	
	installation limitation	Falls unresolved at this point: height read from the flat finished-floor target.	? unknown			
	mounting	wall	P proposed			
	product bottom above selected floor (mm)	1200	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner, 5 Oct 2026: bottom edge 1200 mm, as now, to clear the tap (proposed)	
	installed bottom level (mm)	1200	P proposed	Bathroom: finished-floor; existing floor surface (current tile top)	Owner: centred over the vanity, back to the right wall's finished face; Owner, 5 Oct 2026: bottom edge 1200 mm, as now, to clear the tap (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	installed top level (mm)	1820	? unknown	Bathroom: finished-floor; existing floor surface (current tile top)	Owner: centred over the vanity, back to the right wall's finished face; Owner, 5 Oct 2026: bottom edge 1200 mm, as now, to clear the tap (proposed); owner: about 120 mm below the current tile, seen from underneath; confirm after demolition; owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm; owner: 10 mm porcelain, to be checked; owner survey (#1): existing internal surfaces 2110 × 3020 mm; surface-to-frame about 45 mm, seen in one place (#1); owner: guess the framing until demolition; owner's tile and build-up choices; owner: "glue probably 4mm"; the tiler's choice	
	orientation / mirror	0 degrees / false	P proposed			
	geometry basis	Envelope fallback: no sourced outline supplied; exact planning envelope	? unknown			
	project selection	reused	ENT entered			
	exact product	Two-door mirror shaving cabinet (reused) · manufacturer unknown · model unknown	ENT entered			
	Product code	unknown	? unknown			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
Toilet (toilet)	footprint w × d (mm)	381 × 700	ENT entered			


Element	Property	Value	Status	Measured from	Source	Missing
	set-out	2650 from A · 0 off finished	P proposed	wall_e right side, finished face	Owner, 7 Oct 2026: the suite moves to the plan position, 2600 mm from the window wall's existing surface to its centreline; back-to-wall, so its back is on the right wall's finished face	
	project selection	reused	ENT entered			
	exact product	American Standard Cygnet Over-height Square back-to-wall suite with SpaLet E-bidet seat (reused, moved) · manufacturer American Standard · model Cygnet Hygiene Rim Over-height Square close coupled back-to-wall toilet suite, bottom inlet, with SpaLet E-bidet seat	ENT entered			
	Product code	9509830	ENT entered			
	Finish	unknown	? unknown			
	Size / configuration	unknown	? unknown			
	Handedness	unknown	? unknown			
	components	unknown	? unknown			
Fixed glass screen (screen)	footprint w × d (mm)	900 × 10	ENT entered			
	set-out	?	? unknown			not set out from a wall face
	project selection	unknown	? unknown			
Waste service points						
Toilet: Pan waste, S-trap (floor)	service	waste	ENT entered			
	out from finished face (mm)	140–260	PUB published	finished face	American Standard M33158 Rev.03 install sheet: S-trap set-out 140–260 mm from the finished wall to the waste centre (260 nominal), on the pan centreline. A P-trap is 190 mm high instead	
	across from fixture centreline (mm)	0	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: S-trap set-out 140–260 mm from the finished wall to the waste centre (260 nominal), on the pan centreline. A P-trap is 190 mm high instead	
	up from finished floor (mm)	?	? unknown			up height
	along from end A (mm)	2650	P proposed	wall_e end A		
Water service points						
Bath mixer and spout: Mixer body behind the hub (hot and cold inlets: spacing, size and depth are not on the set drawing)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	across from fixture centreline (mm)	60	P proposed	fixture-centreline	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	up from finished floor (mm)	750	P proposed	finished floor	Hub centre 60 mm right of the plate centre facing the wall (set drawing, derived) at the owner's proposed 750 mm plate centre	
	along from end A (mm)	610	P proposed	wall_e end A		
Shower system: G1/2 inlet at the upper wall rose (on the rail centreline)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	

Element	Property	Value	Status	Measured from	Source	Missing
	across from fixture centreline (mm)	0	P proposed	fixture-centreline	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	
	up from finished floor (mm)	1700	P proposed	finished floor	Y1173 drawing: G1/2 at the upper rose, 500 mm above the lower bracket; lower bracket at the owner's proposed 1200 mm (open), so 1700 mm	
	along from end A (mm)	2470	P proposed	wall_w end A		
Shower mixer: Mixer body behind the plate (inlet layout and rough-in depth are not on the drawing; about 33.5 mm behind the plate, derived)	service	water	ENT entered			
	out from finished face (mm)	0	P proposed	finished face	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	across from fixture centreline (mm)	0	P proposed	fixture-centreline	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	up from finished floor (mm)	1000	P proposed	finished floor	Plate centre at the owner's proposed 1000 mm; along the wall it is the drawn stand-in	
	along from end A (mm)	2220	E estimated	wall_w end A		
Toilet: Cold water point (stop tap)	service	water	ENT entered			
	out from finished face (mm)	0	PUB published	finished face	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	across from fixture centreline (mm)	-180	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	up from finished floor (mm)	180	PUB published	finished floor	American Standard M33158 Rev.03 install sheet: cold water point 180 mm high, 180 mm left of the pan centreline facing it	
	along from end A (mm)	2470	P proposed	wall_e end A		
Power service points						
Toilet: SpaLet seat power point	service	power	ENT entered			
	out from finished face (mm)	0	PUB published	finished face	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved vanity GPO is the electrician's call	
	across from fixture centreline (mm)	-330	PUB published	fixture-centreline	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved vanity GPO is the electrician's call	
	up from finished floor (mm)	300	PUB published	finished floor	American Standard M33158 Rev.03 install sheet: SpaLet power point 300 mm high, 330 mm left of centre. Whether the seat gets its own outlet or reaches the moved vanity GPO is the electrician's call	
	along from end A (mm)	2320	P proposed	wall_e end A		

Unresolved in this view (76)

- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: outlet position unknown; printed as "?" (missing outlet position along the channel (entered on the waste), outlet sideways offset (brief)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: body depth below grate (mm) unknown; printed as "?" (missing installation depth not in the Kano 316 Tile Insert Waste 120×120, brushed nickel brief).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: outlet position unknown; printed as "?" (missing outlet sideways offset, outlet from body back edge, body depth (envelope) (brief)).
- Corner bath (bath): set-out unknown; printed as "?" (missing not set out from a wall face).
- Corner bath (bath): wasteFromEnd unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the end. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromEnd.).
- Corner bath (bath): wasteEnd unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): wasteFromSide unknown; printed as "?" (missing Sheet gives 520 mm from the right-angle corner along the bisector, not from the side. Along each wall that is 520/√2 ≈ 367.7 mm; that conversion is derived in the host-frame check, not entered as published wasteFromSide.).
- Corner bath (bath): wasteConnectionDiameter unknown; printed as "?" (missing The Enflair drawing names a Ø50 waste hole, not a pipe connection or outlet size. No connection diameter is entered.).
- Corner bath (bath): surround unknown; printed as "?" (missing Not entered from the cited source.).
- Corner bath (bath): surroundDetail unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): tapHoles unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): holeLayout unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): fixingLayout unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): inletMode unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): inletSpacing unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).

- Bath mixer and spout (bath_mixer): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): concealedDepthMin unknown; printed as "?" (missing Not entered from the cited source.).
- Bath mixer and spout (bath_mixer): concealedDepthMax unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): set-out unknown; printed as "?" (missing not set out from a wall face).
- Bath waste (bath_waste): width unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): depth unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): height unknown; printed as "?" (missing Not entered from the cited source.).
- Bath waste (bath_waste): outletDiameter unknown; printed as "?" (missing Carton prints 40 mm nominal connection; no manufacturer sheet, so not entered as a published figure).
- Bath waste (bath_waste): overflow unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): set-out unknown; printed as "?" (missing not set out from a wall face).
- Basin mixer (basin_mixer): fixingLayout unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): inletMode unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): inletSpacing unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): waterConnection unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): concealedDepthMin unknown; printed as "?" (missing Not entered from the cited source.).
- Basin mixer (basin_mixer): concealedDepthMax unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): pressureMax unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): temperatureMax unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): adjustmentMin unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): adjustmentMax unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Shower system (shower_system): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): width unknown; printed as "?" (missing Owner's copy of the Enflair K1130 drawing gives plate Ø65; it has no web link, so it is not entered as a published brief figure (the figures are on the measures)).
- Shower mixer (shower_mixer): depth unknown; printed as "?" (missing Owner's copy of the Enflair K1130 drawing gives 65.5 mm lever to plate plus the 4 mm plate; no web link, so not entered as a published brief figure.).
- Shower mixer (shower_mixer): height unknown; printed as "?" (missing Derived from the owner's copy of the Enflair K1130 drawing (Ø65 plate, Ø45 hub, 107 mm lever); no web link, so not entered as a published brief figure.).
- Shower mixer (shower_mixer): mounting unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): tapHoles unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): holeLayout unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): fixingLayout unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): pressureMin unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): inletMode unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): inletSpacing unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): waterConnection unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): inletOffset unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): inletDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): inletHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): concealedDepthMin unknown; printed as "?" (missing Not entered from the cited source.).
- Shower mixer (shower_mixer): concealedDepthMax unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail): fixingCentresWidth unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail): powerOffset unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail): powerHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail): powerDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail): waterConnection unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail_2): fixingCentresWidth unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail_2): powerOffset unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail_2): powerHeight unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail_2): powerDepth unknown; printed as "?" (missing Not entered from the cited source.).
- Towel rail (towel_rail_2): waterConnection unknown; printed as "?" (missing Not entered from the cited source.).
- Toilet: Pan waste, S-trap (floor): up from finished floor (mm) unknown; printed as "?" (missing up height).
- Fixed glass screen (screen): set-out unknown; printed as "?" (missing not set out from a wall face).

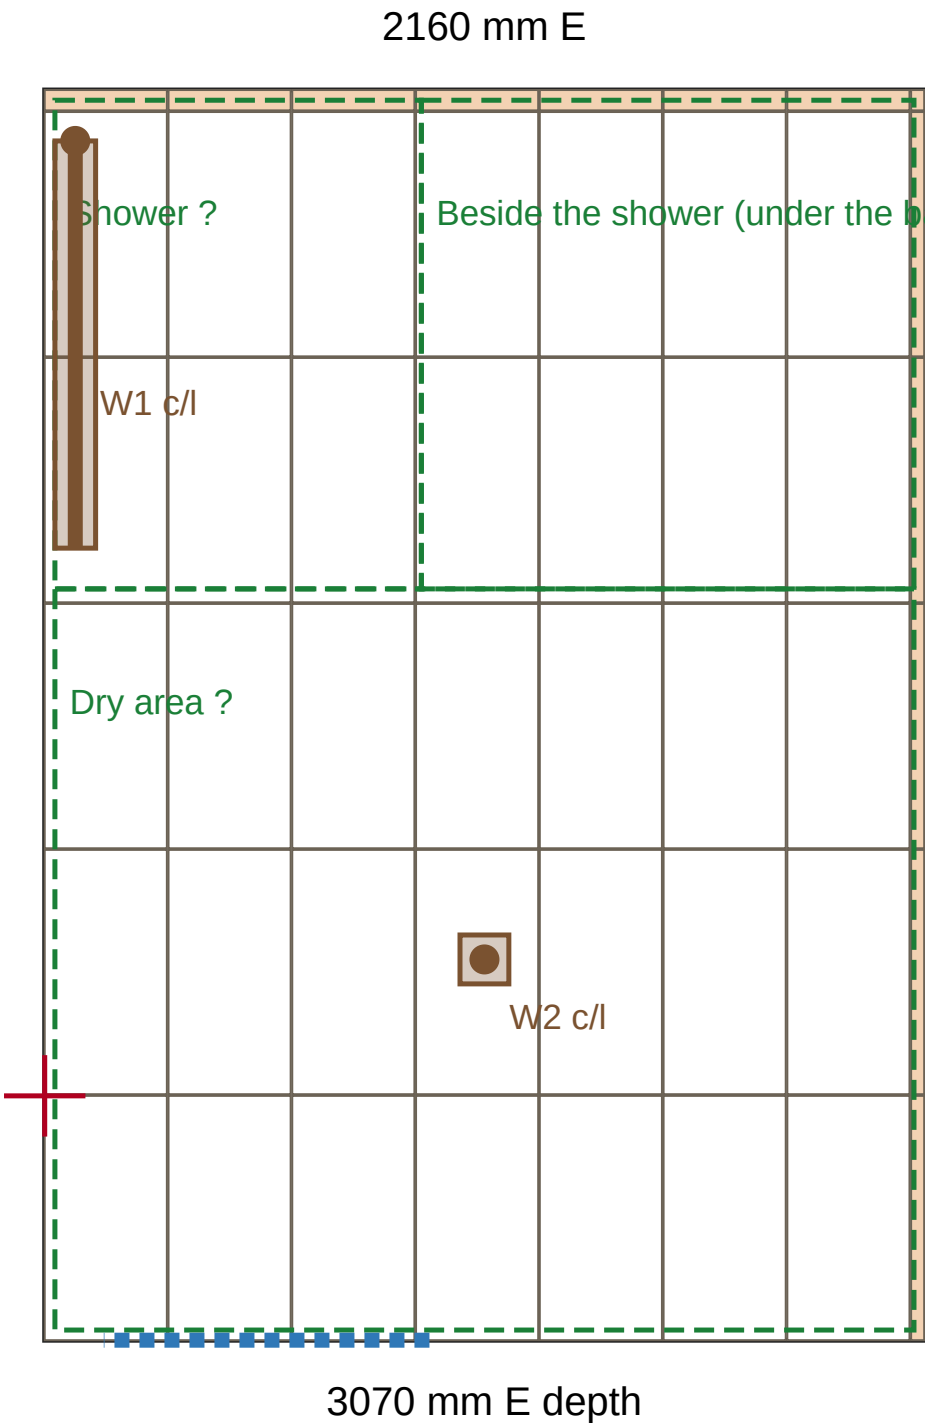

PROPOSED FLOOR TILE SET-OUT · Bathroom Concept · Bathroom

FOR TILER REVIEW · NOT AS-BUILT · NOT FOR ORDERING

Zone: room · long edge axis: y

Origin: a tile's west edge from the finished west face, its south edge from the finished south face.

X 0 P mm · Y 0 P mm

tile length: 600 mm P

tile width: 300 mm P

grout joint: 4 mm P

origin X: 0 mm P

origin Y: 0 mm P

west: finished face of wall_w (right): -25 mm E

east: finished face of wall_e (right): 2135 mm E

north: finished face of wall_n (right): -25 mm E

south: finished face of wall_s (right): 3045 mm E

west cut: 300 (full) mm

east cut: 32 mm

north cut: 50 mm

south cut: 600 (full) mm

Legend: orange cut · white full · red origin axes

Green dashed fall planes · brown waste c/l, shaded grate from its drain brief · blue doorway

SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown

Confirm perimeter / doorway joints, drain apertures and slope-break cuts.

Field note: 300 × 600 sandy beige matte (Tile Wizards porcelain, colour 'Beige'; code not legible in the photo). Long side runs toward the window wall and continues up it. Full tiles start at the doorway.

W1 Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet

WO50-BN: centre line start: X 75 mm after a tile start (over tile), Y 71 mm after a tile start (over tile); end: X 75 mm after a tile start (over tile), Y 467 mm after a tile start (over tile); grate 100 × 1000 mm; west edge 25 mm after a tile start (over tile), east edge 125 mm after a tile start (over tile), north edge 71 mm after a tile start (over tile), south edge 467 mm after a tile start (over tile)

W2 Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: centre point: X 168 mm after a tile start (over tile), Y 269 mm after a tile start (over tile); grate 120 × 120 mm; west edge 108 mm after a tile start (over tile), east edge 228 mm after a tile start (over tile), north edge 209 mm after a tile start (over tile), south edge 329 mm after a tile start (over tile); tile insert: cut a tile piece to fill the insert as well as the opening around it

UNRESOLVED: door door_s transition: finished face or real clear width unresolved

UNRESOLVED: fall plane Shower: slope/levels unresolved

UNRESOLVED: fall plane Beside the shower (under the bath): slope/levels unresolved

UNRESOLVED: fall plane Dry area: slope/levels unresolved

REVIEW: Plane "Shower" has no derived heights: unknown Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level.

REVIEW: Plane "Beside the shower (under the bath)" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.


REVIEW: Plane "Dry area" has no derived heights: unknown Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level.

REVIEW: Grate outlines come from the linked drain briefs. Confirm clearance, edge joints and cut shape on site.

REVIEW: east cut is 32 mm: narrow piece for tiler review.

REVIEW: Tiles cross floor-plane boundaries. Confirm slope-break cuts and movement joints with the tiler.

PROPOSED SET-OUT · NOT AS-BUILT

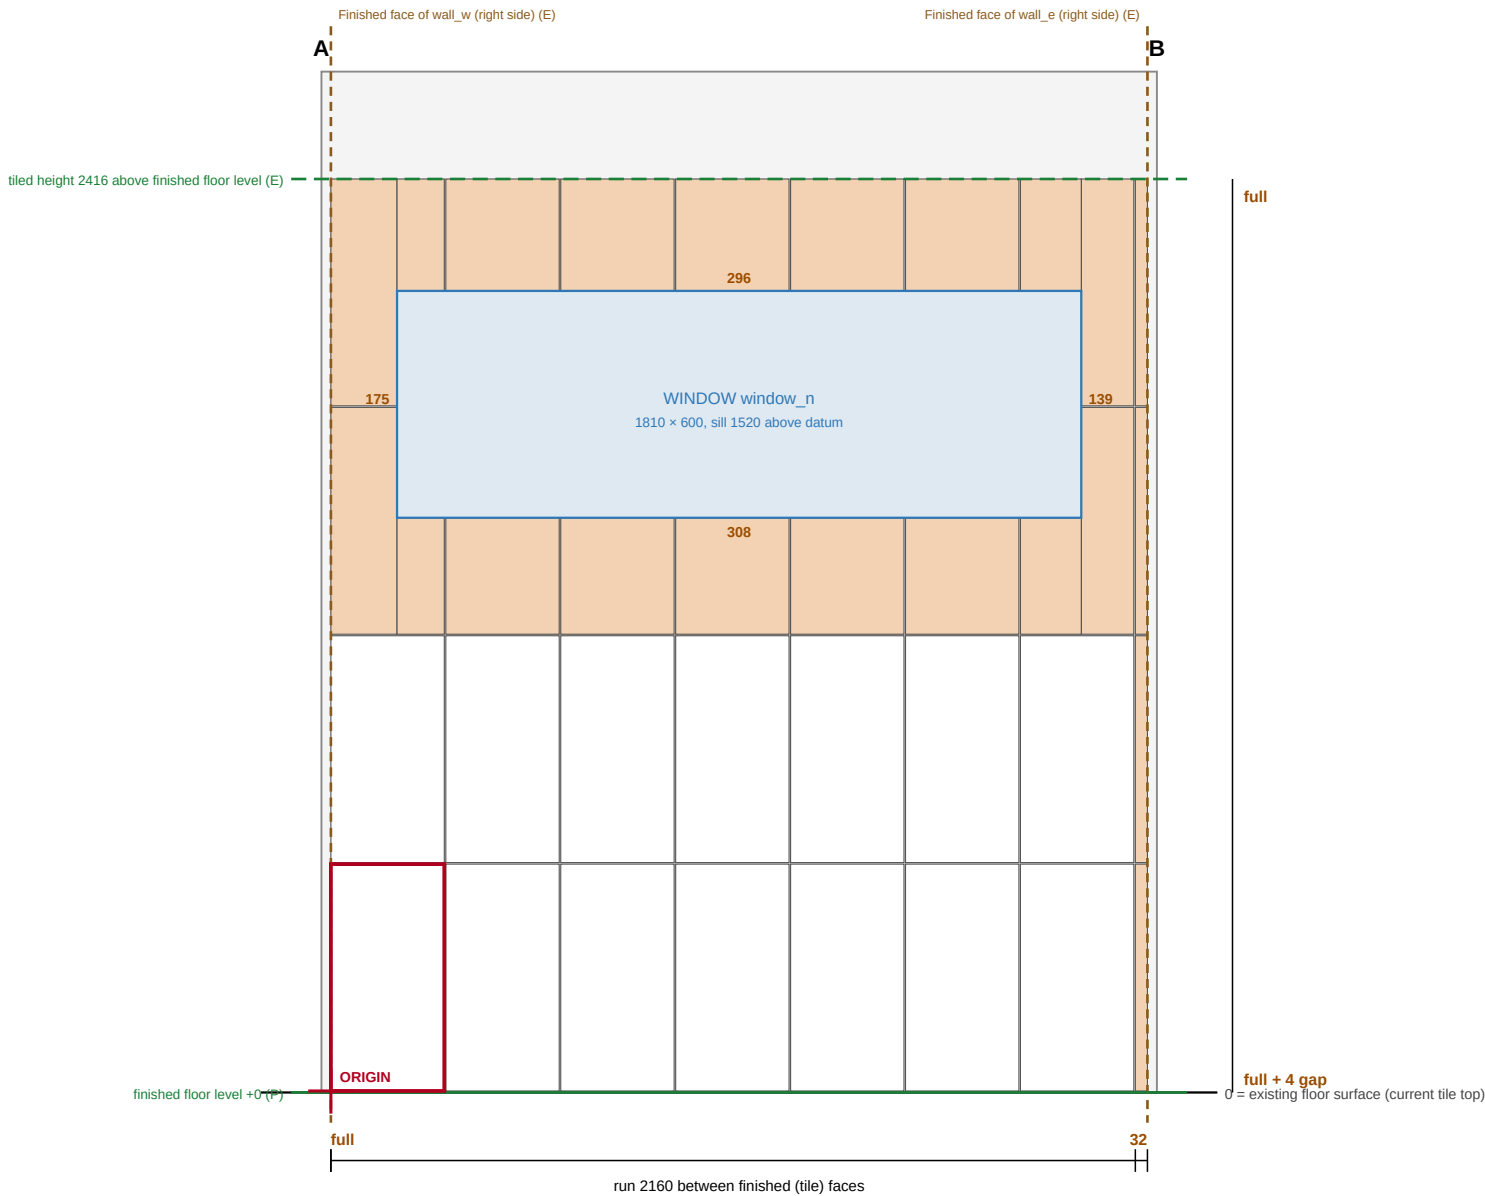

Tile set-out (proposed)

Tile: 600 × 300 mm (P/P), portrait
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end A finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
8 columns × 4 courses, 22 cut pieces of 36

Cuts (mm)

End A cut (to finished (tile) face of wall_w): full
End B cut (to finished (tile) face of wall_e): 32
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full
Window window_n jamb, A side: 175
Window window_n jamb, B side: 139
Window window_n under sill: 308
Window window_n over head: 296


Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_n, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

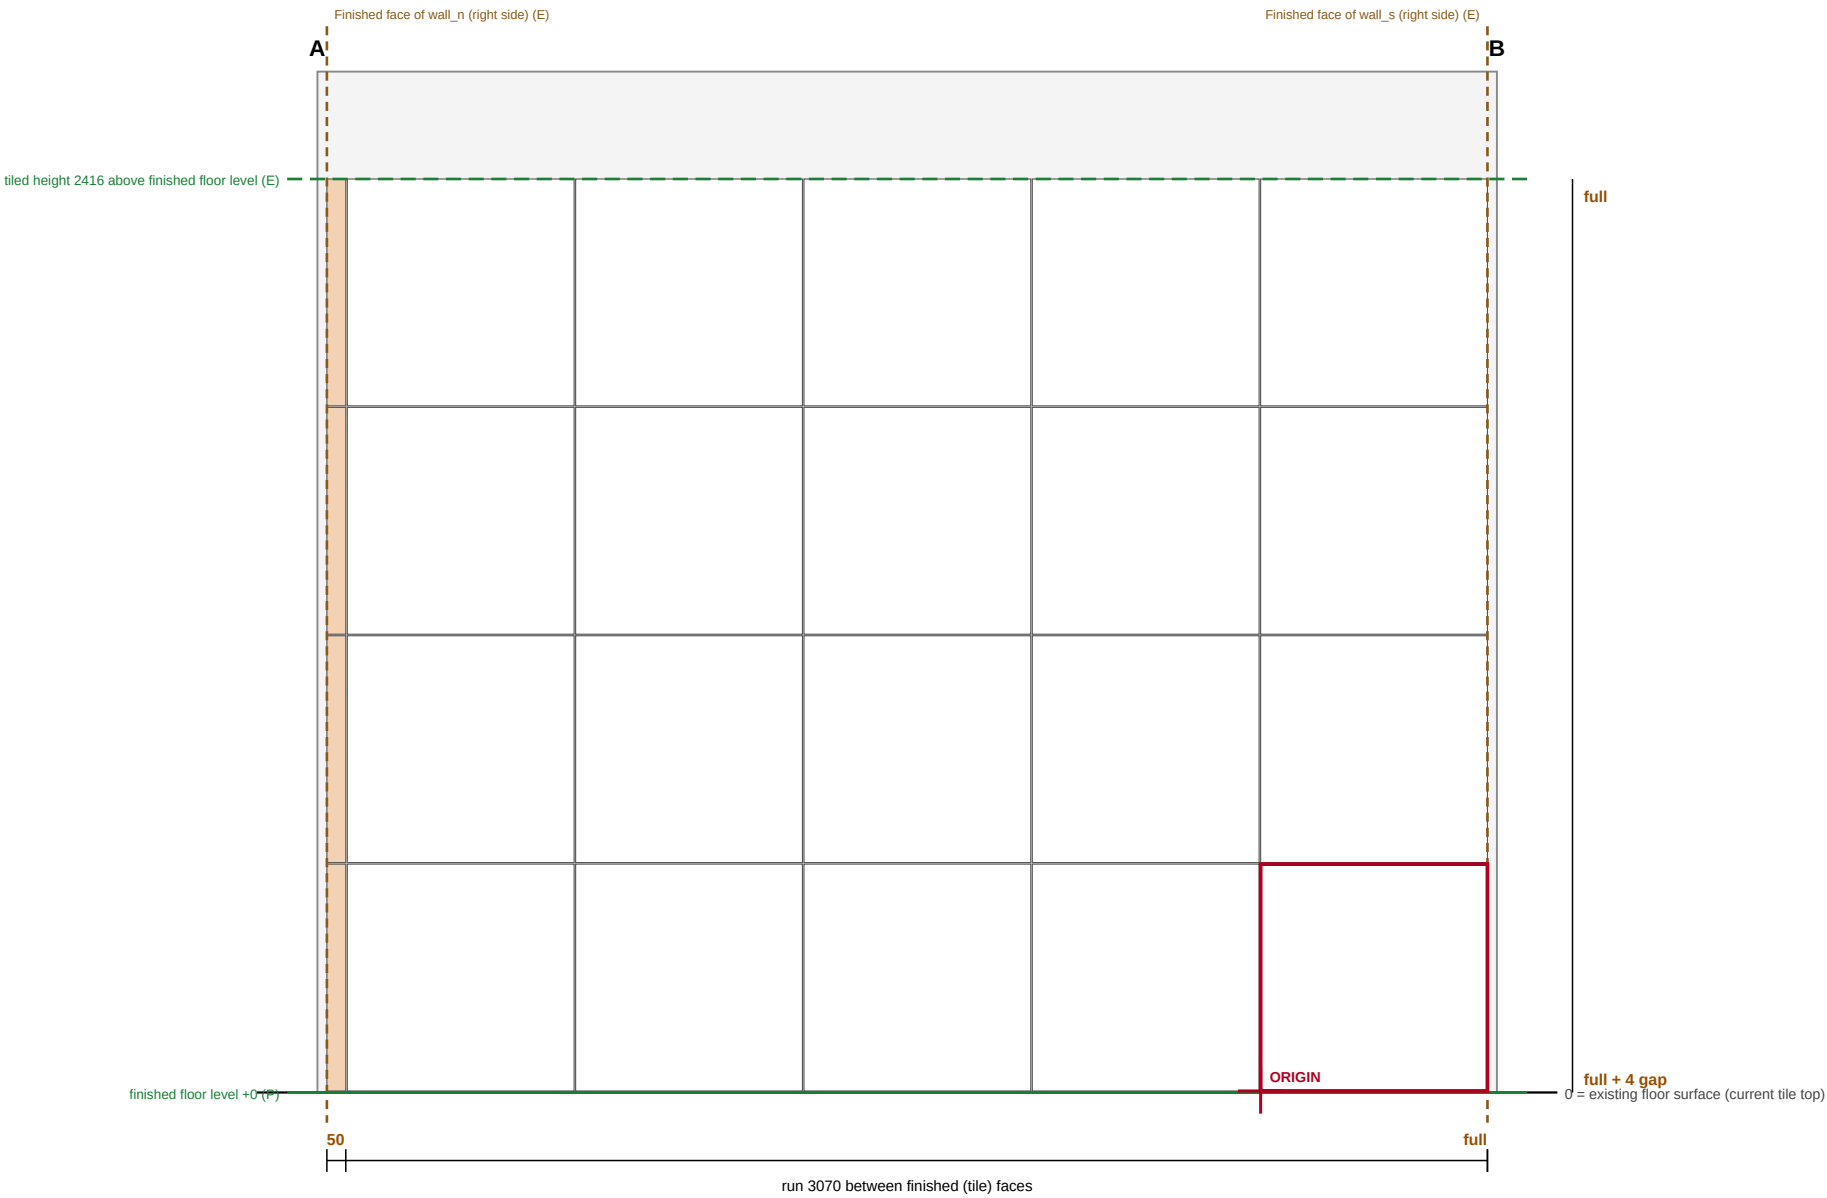

Tile set-out (proposed)

Tile: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end B finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
6 columns × 4 courses, 4 cut pieces of 24

Cuts (mm)

End A cut (to finished (tile) face of wall_n): 50
End B cut (to finished (tile) face of wall_s): full
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full


Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_e, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

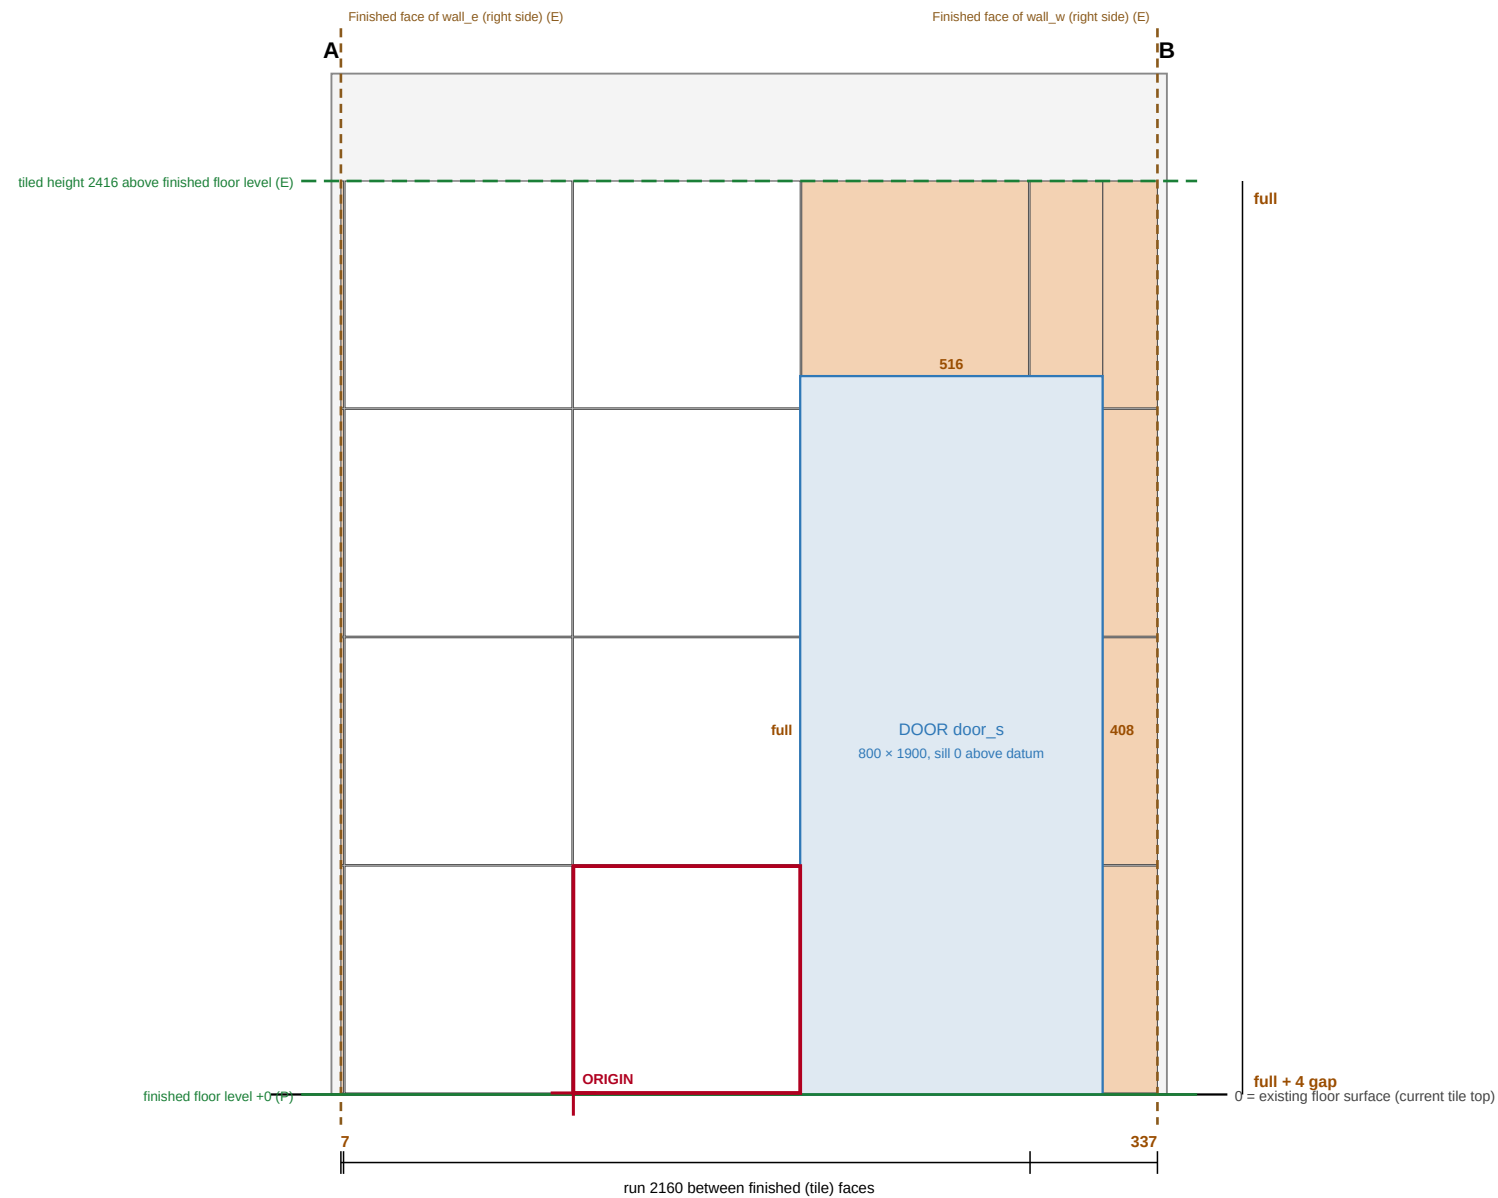

Tile set-out (proposed)

Title: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from door_s A-side jamb, tiles toward A
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
5 columns × 4 courses, 10 cut pieces of 18

Cuts (mm)

End A cut (to finished (tile) face of wall_e): 7
End B cut (to finished (tile) face of wall_w): 337
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full
Door door_s jamb, A side: full
Door door_s jamb, B side: 408
Door door_s over head: 516

Legend

Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.


Bathroom Concept

Wall wall_s, right side (faces Bathroom) · elevation looking at the face

Scale 1:20 @ A3 · basis: estimated

Prepared by: ?

PROPOSED SET-OUT · NOT AS-BUILT

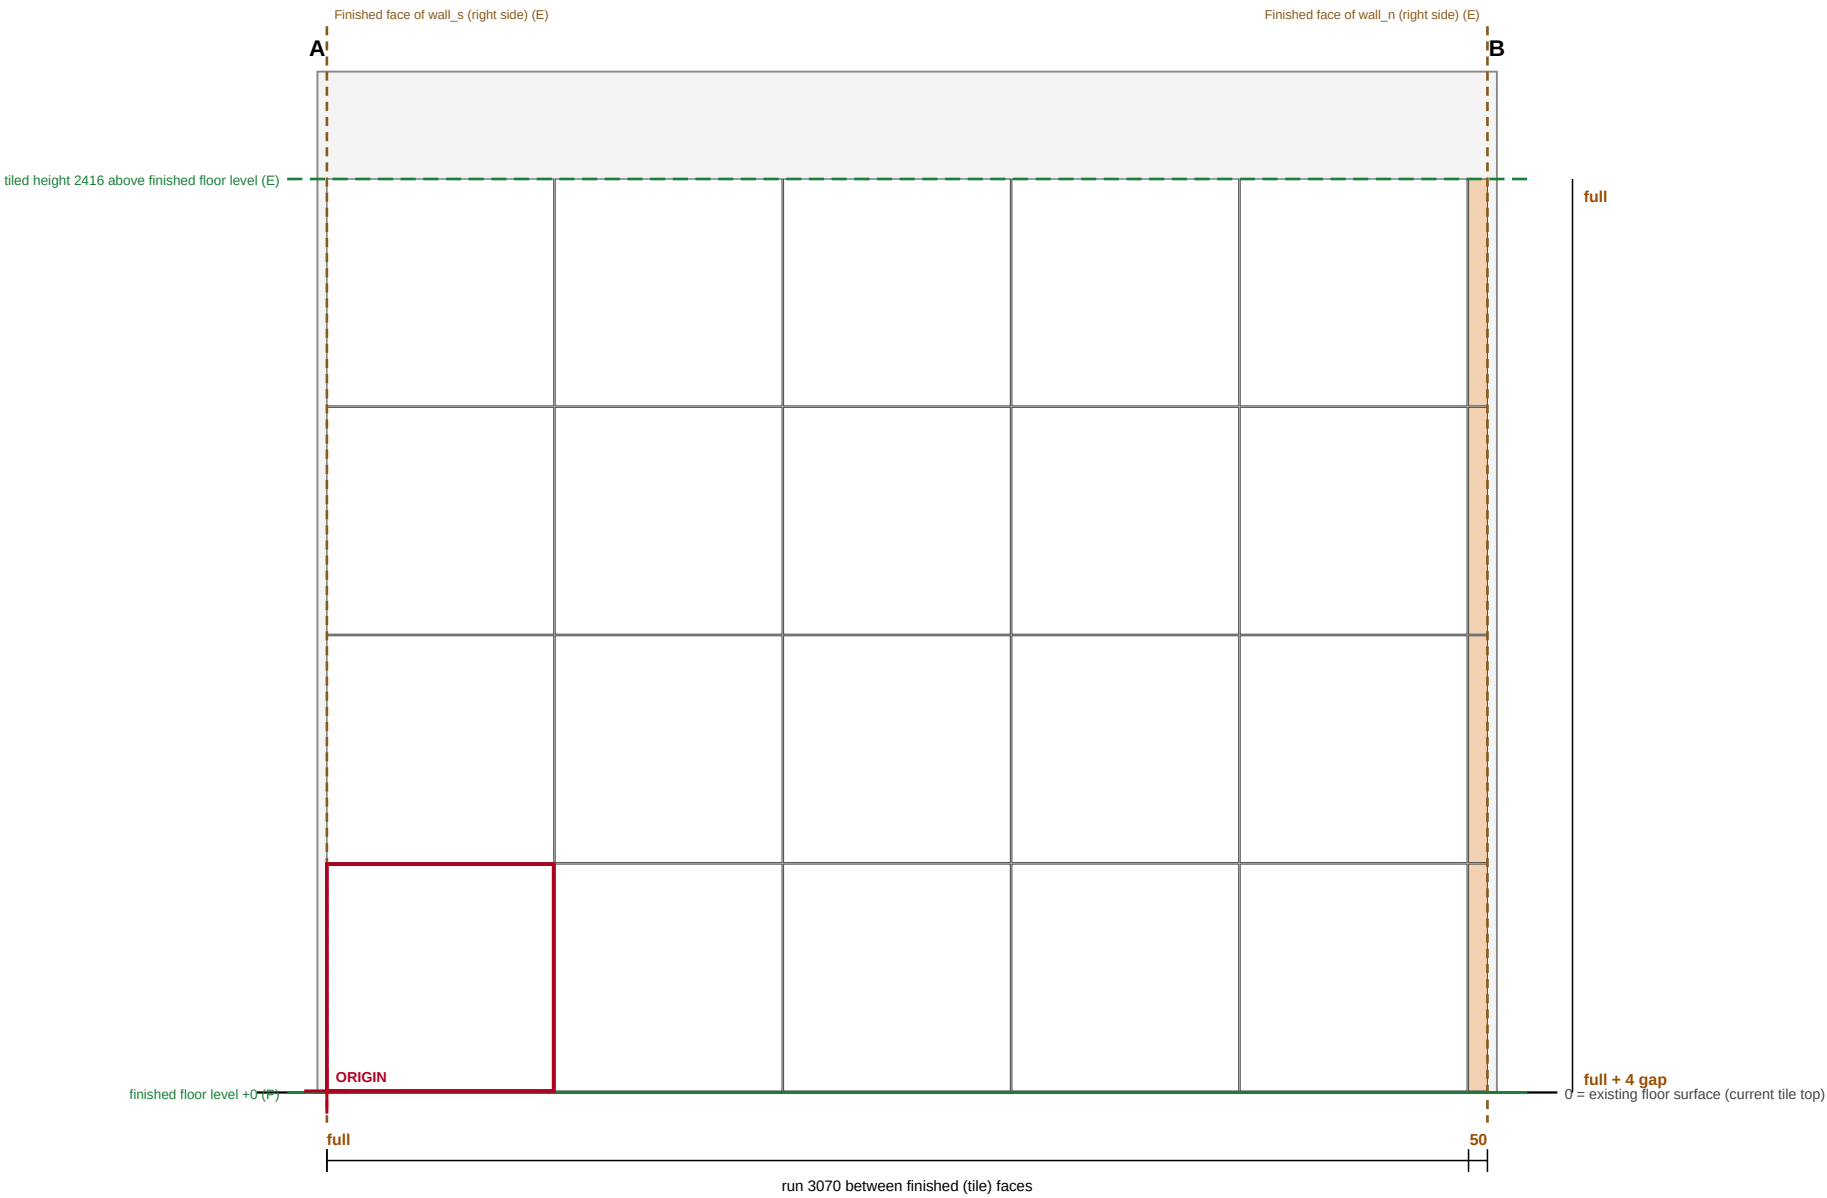

Tile set-out (proposed)

Tile: 600 × 600 mm (P/P), landscape
Grout joint: 4 (P)
Cut to: finished (tile) face of each return wall
This wall's Finished face: 25 from drawn line
Floor reference: finished floor level = +0 above existing floor surface (current tile top)
Origin: 0 (P) from end A finished face
4 (E) above finished floor level
Tiled height: 2416 (E) above finished floor level
6 columns × 4 courses, 4 cut pieces of 24

Cuts (mm)

End A cut (to finished (tile) face of wall_s): full
End B cut (to finished (tile) face of wall_n): 50
Bottom course (from finished floor level): full + 4 gap
Top course (at tiled height): full

Legend


Along-wall dimensions are to the face named; heights are from the floor reference.
Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · ? unknown
Tinted pieces are cut. Openings are cut to their entered clear size; reveals not modelled.

Bathroom Concept

Wall wall_w, right side (faces Bathroom) · elevation looking at the face
Scale 1:20 @ A3 · basis: estimated
Prepared by: ?

Bathroom · proposed in-screed heating

Planning and communication only. Manufacturer / electrician approval pending; not an electrical installation or compliance approval.

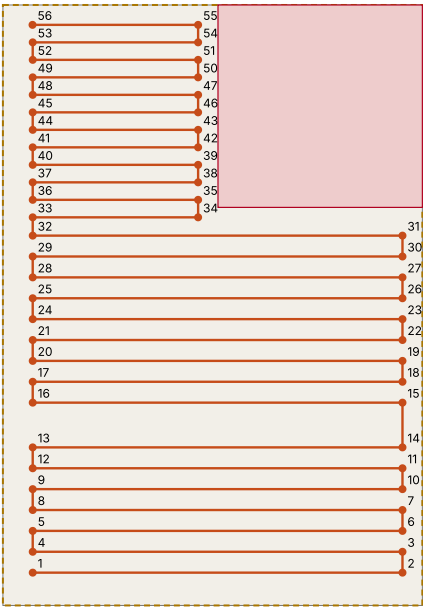

Plan route length: 42.5 m · Spatial route length (sampled profile): unknown · selected zone footprint: 6.3722 m² · zone area excluding entered keep-outs: 5.3257 m². Coverage-range check uses availableArea (zone footprints excluding entered keep-outs), the same resolver as evidence. That area is not verified heat coverage. Plan route length is the XY projection (modelled). Spatial route length follows the sampled cable profile (modelled) and drives confirmed product balance only when the whole profile resolves. Product length comes from the referenced brief. Unsupplied cold tails and connections are excluded.

Minimum non-adjacent spacing: 88 mm · boundary clearance: 100 mm · keep-out clearance: 100 mm · remaining confirmed cable length: unknown.

Cable depth datum: bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top. Wall setback datum: selected zone boundary as stored (sample room rectangle = existing internal surface). Intended trade datum is the finished wall face; that conversion is not applied.. coverage area / cable length: Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement.

Prod uct / cons traint	Value	Kind / source
manu factu rer	unknown	unknown
mode l	SCK0765L	product identity (submission text, not a published figure)
prod uctSo urce	SCK0765L carton label	User-entered text
requi reme nts	Owner lays it on the cured membrane, before the tiler's screed, fixed with Ametalin tape (polyurethane membrane; owner holds 100 m) at the run ends and every 1–1.5 m, per the Coldbuster in-screed manual (July 2023, taken as this cable's manual: it does not name SCK0765L). The electrician tests it before and after the screed (the manual's p. 16 record, for the warranty), wires the thermostat on an RCD circuit, and runs the floor sensor's conduit. Owner, 5 Oct 2026: the thermostat end is at the bathroom doorway, where the floor beyond is timber; the 3.0 m cold tail (manual; the manual's cable is Ø6 mm) goes down through it to under the house (on piers). Owner, 7 Oct 2026: the cable runs under the shower (the electrician approved it) but not under the bath, so the heated area stays within the 5.1 m² that 42.5 m covers. Proposed loop: east–west runs, 100 mm off the walls and the bath (manual, p. 6), 150 mm off the left wall to clear the linear drain, widened round the Kano waste (manual, p. 10); 105 mm in the dry area and 88 mm in the shower and beside the bath (tighter where the floor is wet), both inside the derived coverage/length range (3.7–5.1 m² / 42.5 m ≈ 87–120 mm) and the Coldbuster manual's 70–120 mm for bathrooms (p. 7); the two spacings make the loop use exactly 42.5 m. Modelling choice, not a manufacturer or code spacing requirement. Plan length is exactly 42.5 m, equal to the published heated length (zero slack): any resolved fall makes the spatial route exceed 42.5 m once screed levels resolve. Not yet decided: keep-outs at the toilet (its pan is screwed to the floor through brackets) and the vanity; the route runs under both.	User-entered text
scree dLay erId	floor_screed	User-entered text

Cable prod uct lengt h	42.5 m · published · carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m · SCK0765L in-screed heating cable carton: heated length 42.5 m
Rated output	765 W · published · carton label — SCK0765L in-screed heating cable carton: 765 W	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 765 W · SCK0765L in-screed heating cable carton: 765 W
Cove rage area, mini mum	3.7 m ² · published · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , minimum	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , minimum · SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , minimum
Cove rage area, maxi mum	5.1 m ² · published · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , maximum	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , maximum · SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , maximum
Deriv ed spaci ng, mini mum	0.0871 m · derived · coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m ² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).	derived · coverage area / cable length · coverage-area / cable-length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m ² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).
Deriv ed spaci ng, maxi mum	0.12 m · derived · coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m ² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).	derived · coverage area / cable length · coverage-area / cable-length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m ² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m ² , maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).
Cable rated curre nt	3.2 A · published · carton label — SCK0765L in-screed heating cable carton: 3.2 A	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 3.2 A · SCK0765L in-screed heating cable carton: 3.2 A
Cable rated volta ge	240 V · published · carton label — SCK0765L in-screed heating cable carton: 240 V AC	published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 240 V AC · SCK0765L in-screed heating cable carton: 240 V AC
Ther most at rated switc hing curre nt	16 A · published · carton label — Photographed MWD5-1999-CBP3 carton label: 16 A	published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 16 A · Photographed MWD5-1999-CBP3 carton label: 16 A
Ther most at rated volta ge, mini mum	100 V · published · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC	published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC · Photographed MWD5-1999-CBP3 carton label: 100–240 V AC

Ther most at rated volta ge, maxi mum	240 V · published · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC	published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC · Photographed MWD5-1999-CBP3 carton label: 100–240 V AC
Plan route lengt h	42.5 m · modelled	modelled · drawn-path · XY projection of the drawn path. Modelled, not published cable length.
Spati al route lengt h	unknown (unknown; Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.)	unknown · drawn-path · Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.
Rema ining confi rmed prod uct lengt h	unknown (unknown; Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.)	unknown · confirmed product length – modelled spatial route length · product-minus-route · Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.
Ther most at printe d IP	IP21 · published	carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21
Enter ed mini mum spaci ng	unknown	unknown · source not supplied
Enter ed clear ance	100 mm	published · Coldbuster In Screed Heater Kit Installation Manual (July 2023), p. 6: mark 100–200 mm from the walls; Coldbuster recommends 100 mm. Taken as this cable's manual: it does not name SCK0765L
Cable centr e abov e scree d botto m	unknown	unknown · source not supplied

Selected zones: bathroom

Sampled profile at vertices, plane boundaries and interval midpoints. Cable centre is measured from the bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top. Entered screed thickness applies throughout the route; local screed top follows entered finished planes minus layers above. Trade must verify variable thickness, substrate and slope.

Cable section unresolved — missing levels / cable height

[illegible]

Keep-out	x / y / width / height (mm)	Source
Bath	1082 mm / 0 mm / 1028 mm / 1018 mm	Owner, 7 Oct 2026: floor under the bath left unheated so the heated area stays within the 5.1 m² the 42.5 m cable covers

- warning · heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- warning · heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- warning · heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- warning · heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- warning · heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- warning · heating_coverage_range: Zone area excluding entered keep-outs 5.3257 m² (availableArea, same resolver as evidence; not a laid-cable heat-coverage model) is outside the brief coverage range 3.7–5.1 m² (published, project-snapshot (unresolved), carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum).
- warning · heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- warning · heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.

The room in 3D, stage by stage


Renders of the same model the drawings come from (shots/renovation-3d). For orientation only: dimension from the drawings.




Finished room, from above



Finished room, eye level

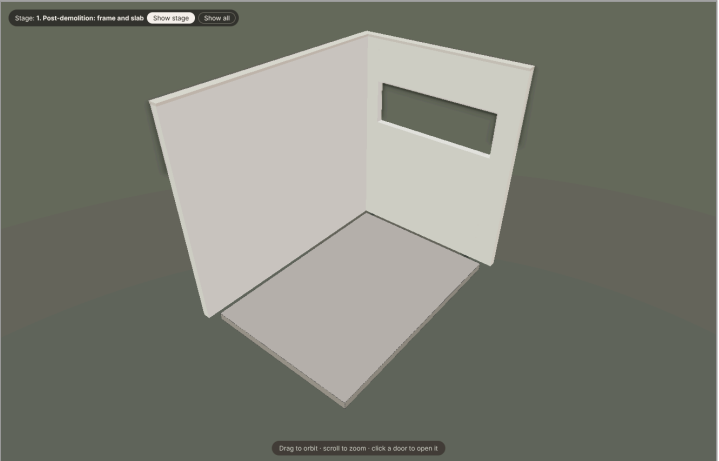

1. Post-demolition

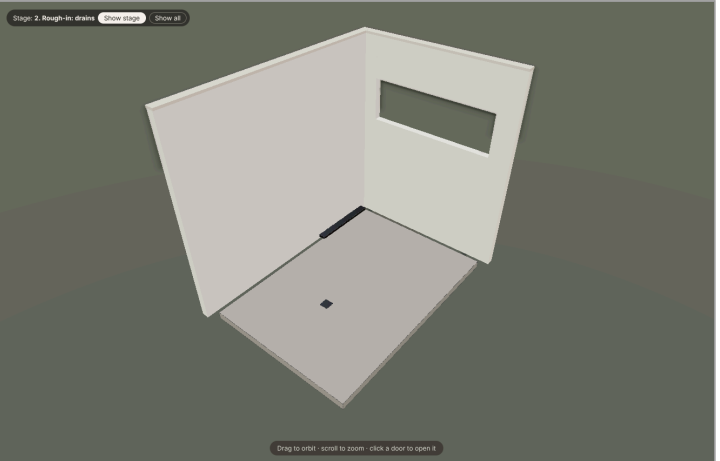

2–3. Frame and rough-in



Board and window



4. Waterproofing



5–8. Screed and tiles



9. Fit-out